RF & MICROWAVE
SWITCHES

COAXIAL
SWITCHES

Full Line Catalog

SIMPLIFICATION IS OUR INNOVATION

Radiall

SIMPLIFICATION
is our INNOVATION

Radiall is a community of dedicated individuals with a shared purpose: simplify life for all those who innovate. Our manufacturing expertise allows us to deliver lighter and smaller products that simplify implementation and drive performance. We recognize that simplification starts with us, but proves its true benefits when it reaches you.





TABLE OF **CONTENTS**

Technical Information	1
SPDT	2
DP3T & SPDT Terminated	3
DPDT	4
SPnT	5
Low PIM	6
Space	7
Other	8
Navigator	9


AEROSPACE
DEFENSE
TELECOM
INDUSTRIAL & RAIL
SPACE
TEST & MEASUREMENT
MEDICAL

OUR **COMPANY**

Since 1952, we have been enabling the future through collaboration with our customers. The results are a range of innovative and award-winning products that customers trust for unrivaled repeatability and performance.

We are a global company with facilities around the world that specializes in manufacturing the highest-quality interconnect components to support the most demanding applications. At Radiall, you can rely on us to be the industry's global market leader.

INDUSTRIES WE SERVE

For over 60 years, we have fostered relationships grounded in trust by sharing our extensive market knowledge, technological expertise and experience in each and every interaction. Through an understanding of our customers' unique challenges, we are able to design simple solutions specific to their application and requirements.

*Visit **www.radiall.com** for more information.*

OUR VALUES

Guiding Our Actions Every Day



GROW TOGETHER

With Our Teams and the World Around Us



BE GENUINE

To Foster Mutual Trust and Grow




MAKE IT SIMPLE

To Accelerate Innovation



DARE TO BE AUDACIOUS

To Make a Difference

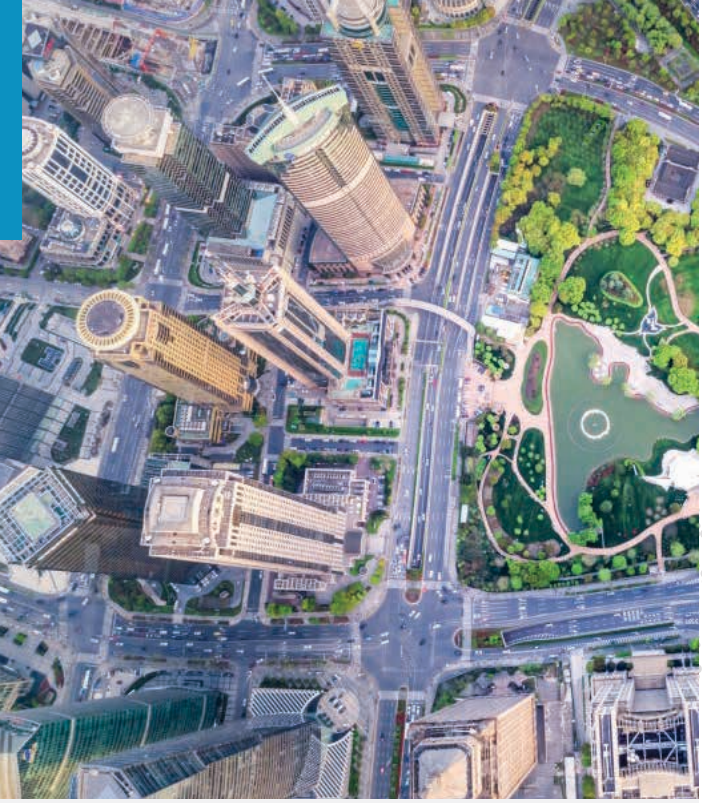



Connecticut

Obregón



AWARDS & CERTIFICATIONS

Being recognized for our product performance, innovation and timely fulfillment is a testament to our employees' commitment to our customers. We are a world market leader in reliable, repeatable performance and take great pride in providing award-winning innovation and vendor support.

Our leadership is focused on long-term success and developing key technologies that simplify our customers' lives.

We're committed to our people, the environment and to the highest quality standards including ISO 9001, ISO 14001 and AS9100 certifications. We are compliant with the EU Restriction of Hazardous Substances (RoHS) as well as the Registration, Evaluation, Authorization and Restrictions of Chemicals (REACH) systems.

Visit our website to view RoHS and REACH compliance information for specific Radiall part numbers.

IN-HOUSE TECHNOLOGIES

- *High-Precision Machining*
- *Stamping*
- *Plating*
- *Molding*
- *Polishing*
- *Laser, Ultrasonic, Vapor, Soldering*
- *Etching on Si*
- *Thick Film on AlN*
- *Testing and Simulation*



Château-Renault



Shanghai



L'Isle-d'Abeau

Centr'Alp




GLOBAL PRESENCE

Recognizing that relationships are rooted in trust, we strive to earn our customers' confidence by demonstrating our market knowledge, technological expertise and experience in each and every interaction.

SALES OFFICES **INDUSTRIAL PLANTS**

COMPREHENSIVE **PORTFOLIO**

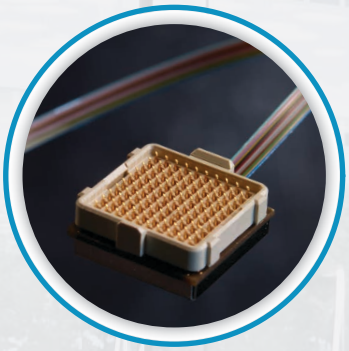

Active Optics

Our high-performance, optical interconnection brand, D-Lightsys®, provides optical transceiver and electronic solutions suitable for harsh environments.



Antennas

With a military and industrial focus, we have solutions for radio tactical communications, vehicles, positioning, LMR/PMR and telemetry applications.



Microwave Components

Our range covers a wide frequency spectrum from DC to 50 GHz, and includes terminations, attenuators, couplers, power dividers, filters and other specialized components.



Optical Connectors

Designed for demanding applications where reliability and high performance are required, our cost-effective optical connectors serve telecom, industrial, aerospace and defense markets.



Outdoor Connectors

Designed for outdoor conditions, our range includes high-power RF coaxial connectors, linking antennas and radio units, as well as innovative multi-signal I/O solutions for optical, Ethernet, power or coaxial links between radio and network.




RF & Microwave Switches

The patented design of our unique, modular actuator and transmission links guarantees operation up to 10 million cycles with superior repeatability.

At Radiall, we provide a comprehensive portfolio of products that meet the application requirements of the key industries we serve. By listening to our customers, we continuously develop new solutions and update our extensive range of products.

With over sixty years of experience and an understanding of the ever-changing business and our customers' technical requirements, we deliver the optimal and most cost-effective, end-to-end interconnect solutions available today.

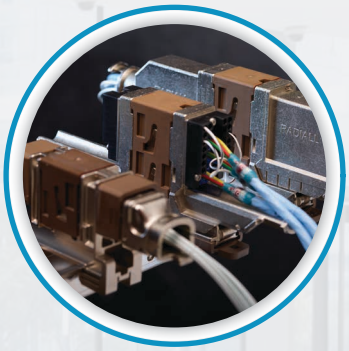

Multipin Aerospace Connectors

For more than 40 years, commercial airframes have trusted our range of rack and panel connectors and modular solutions. Our new miniature connector series combines high performance and reduced weight to meet civil and military aerospace industry demands.



Multipin Industrial Connectors

Our Van-System brand designs and produces a range of robust circular electrical connectors suitable for harsh environments, such as railways, machine tools, and plant engineering equipment.



Optical Cable Assemblies

Our extensive product range and worldwide presence supports customers with standard configurations as well as optimized solutions based on customer requirements.



RF Cable Assemblies

Low-loss and high-frequency characterize our extensive range of cable assemblies, including flexible, semi-rigid and hand-formable solutions with a broad combination of cables and connectors.



RF Coaxial Connectors

We offer the widest range of RF coaxial connectors in the industry; 55 product series are available, including AEP and Mil QPL connectors.



Space Qualified Components

Known for high quality as well as reliability and performance, our product offering includes a wide range of coaxial connectors, cable assemblies, microwave components and switches with a frequency range up to K_a band.



SHIPPING & PACKAGING

Radiall has various size boxes for optimum packaging and protection.

- Eco-friendly labeling tape makes it easy to identify Radiall goods. Printing is minimized to reduce processing and all boxes can be recycled (except for the adhesive).
- Each product part number has a dedicated carton box adapted to the size of its packaging.

SHIPPING INFORMATION

Shipping lead times may vary depending on the location and time zone in which products are stocked or manufactured.

Radiall offers five types of standard packaging, which dictate the first level product container. All of our packages are identified with the Radiall name, part number, lot number and quantity.



TAPE & REEL

Available in 100, 500, 1,800, 3,000 or in custom quantities, products are arranged in an anti-static polyester blister tape covered with a ribbon defender and then rolled up on a polyester reel. This packaging is CEI 286-3 compliant and dedicated to surface mount components. It is compatible with all pick and place automatic machines.



BLISTER TRAY

Custom, stackable trays minimize damage when shipping fragile or large connectors. These trays protect against shock and even have an anti-dust lid/wrapping.



BULK

Bulk packaging is available in multiple bags or a box containing 10, 20, 25, 50 or 100 of each component part in separate bags.



BLISTER BULK PACK

This packaging is suitable for multipart products and small connectors. Radiall offers four types of blister bulk pack depending on the configuration of the product and number of pieces (10, 20, 50 or 100). It is easy to open and ideal for in-field assembly.



UNIT PACKAGING

All connectors can be ordered in unit bags. The connector and all of the component parts come in individual tear-proof polyethylene bags. Unit packaging must be specified when ordering: add “W” at the end of the part number (except for adapters and specific products).

Radiall offers a comprehensive range of in-house electroplating for standard or specific uses and conditions. Radiall's plating facility has operated since 1977 in compliance with the latest environmental standards.

IN-HOUSE PLATING

RADIALL PROPRIETARY PLATING

Available coatings are Copper, Nickel, Nickel phosphorous, Tin, Gold, Palladium, white Bronze (BBR), Chromium, Silver, Nickel, Teflon, and passivation of stainless steel. Base materials on which we apply coatings are Copper alloys, Stainless steel, Ferronickel, Zink die cast,Plastic, and Aluminium.

NPGR (Níckel Phosphorous Gold Radiall) consists of a thin layer of gold, allowing for good wetability, on top of a layer of electrolytic nickel-phosphorous. With the addition of Phosphorous (>10%), the Ni becomes non magnetic and offers a low intermodulation level. Gold combined with NiP provides excellent protection against corrosion and an ultra low friction coefficient allowing up to 10,000 mating cycles. NPGR is recommended for center and outer contacts, PCB/SMT connector bodies, and for telecom/datacom applications. It is not recommended for solder joints in harsh environment or high temperature applications. NPGR is cheaper than standard gold plating and is compliant with AMS QQN 290 and MiL DTL 45204.

N2PGR (New Nickel Phosphorous Gold Radiall) plating is similiar to NPGR but with better corrosion resistance and improved mechanical resistance and reliability of solder joints in high temperatures. This is due to a new Nickel barrier between NiP and gold. N2PGR is compliant with AMS QQN 290 and MiL DTL 45204.


BBR (Bright Bronze Radiall) is a copper-tin-zinc base alloy plating, applicable on all copper substrates which looks like bright white silver. It was designed to replace Ni plating and offers better conductivity while being non allergic and non magnetic. Intermodulation generated by BBR is as low as that with silver plating. BBR connectors are solderable using mildly activated flux. Corrosion and tarnishing resistance are among the most important environmental features, plus excellent wearing resistance and mechanical characteristics. BBR is recommended for outer contacts and conductor bodies in cable and panel connectors' applications.

	Solderability	Electrical Performance	Corrosion Resistance	Friction, Mating Durability	IM, Magnetic Properties	Hardness	Tarnishing	Cost
NPGR - N2PGR[1]	+	++	++	++	+	+	+	+
BBR	-	+	++	+	++	++	++	++
Gold / nickel Ni2Au0.2	+	++	++	+	-	+	+	+
Gold / copper Cu2.5Au1.3	+	++	++	+	+	-	+	--
Silver	+	++	+	-	++	--	--	-
Nickel	-	+	++	+	--	+	++	+
NiPTFE	--	+	+++	+++	--	+++	+++	--

Notes

1. NPGR is not compatible with Zinc die cast (zamak) parts.



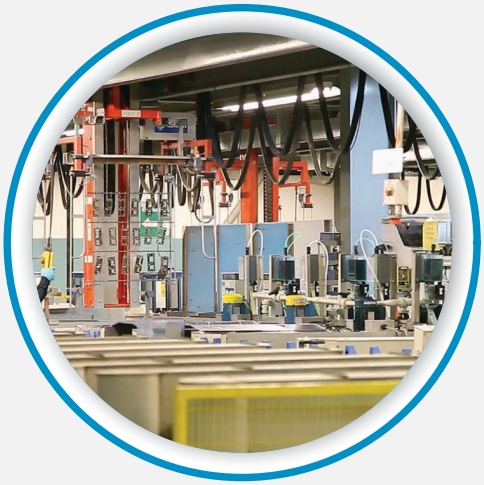

Automatic Plating Production Line



Manual Plating Production Line

STANDARD PLATING

Gold plating has great electrical signal transmission properties. It provides excellent oxidation resistance (even in polluted environment) and mating durability (wear resistant). Gold over copper is mainly used for center and outer contacts. Gold over Nickel is often used for PCB connector bodies to improve solderability. Gold is compliant with MiL DTL 45204.

Nickel plating has been widely used on connector bodies and outer conductors for its mechanical and environmental properties. Because of the risk of allergy, Nickel is often used as an underlayer for gold or other noble metals. The Ni layer acts as a diffusion barrier, to prevent the migration of base material atoms (usually copper) to the top coating. Nickel is magnetic thus not suitable for applications requiring a low IM level. Where Nickel plating is used for PCB connectors with solder legs, choose selective tin plating or hot dipping on the legs before soldering. Nickel is compliant with AMS QQN 290.

Silver's main advantage is its excellent electrical and thermal conductivity, featuring the lowest contact resistance. Silver plated connectors are particularly suitable for applications where low intermodulation is required. It is also recommended for connector parts that need soldering or brazing. Silver plating is cheaper than gold plating, but tarnishes over time, creating an oxide layer on the surface and affecting its electrical properties. It can be combined with BBR to avoid tarnishing and is compliant with ASTMB700.

Nickel PTFE plating can be specified for connectors used in harsh environment for military applications, due to it's friction, corrosion and wear resistance. Nickel PTFE is compliant with AMS 2454.

Notes



TECHNICAL INFORMATION

Section 1 Table of Contents

INTRODUCTION

Coaxial Switches Activity Information ..... 1-2 to 1-6
Manufacturing and Quality Assurance Flow 1-7
RAMSES Concept ..... 1-8 to 1-9
RF Arrangement 1-10
Glossary (including RF Power Rating Chart page 1-13) ..... 1-11 to 1-14
RF Repeatability and Life Test Parameters 1-15
Conversions ..... 1-16 to 1-20
User Handbook 1-21
Applications 1-22


COAXIAL SWITCHES ACTIVITY INFORMATION

EXPERIENCE

With over 70 years of experience and continuous efforts in R&D, Radiall has become Europe's number one source for coaxial connectors. Radiall's position as a market leader has enabled the company to excel in the passive microwave component field for more than 60 years. Radiall's expertise in design, development and manufacturing of passive microwave components is widely acknowledged in today's industry.

A WIDE RANGE OF SOLUTIONS

Specialized in passive microwave components, Radiall's design team and engineering staff manufactures a wide range of standard coaxial devices including: terminations, attenuators, couplers, coaxial detectors and coaxial switches covering a frequency range from DC to 67 GHz.

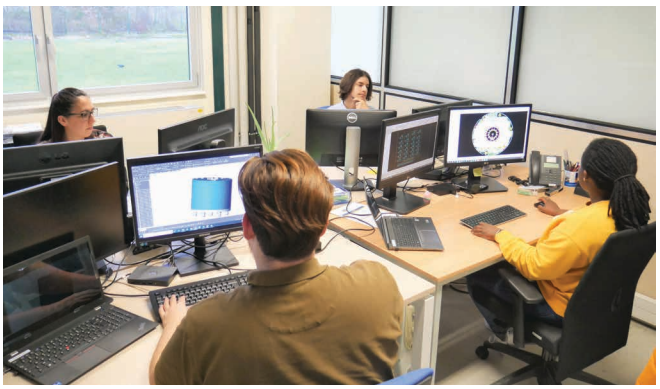


RESEARCH & DEVELOPMENT

Due to the increased complexity of microwave systems, more high performance components are required.

To meet these requirements, Radiall's R&D department is constantly working on development of new products and improvement on existing products.

Equipped with microwave and mechanical CAD and the latest generation of microwave test equipment up to 70 GHz, Radiall uses state-of-the-art technology to optimize products and quickly respond to specific customer requests.

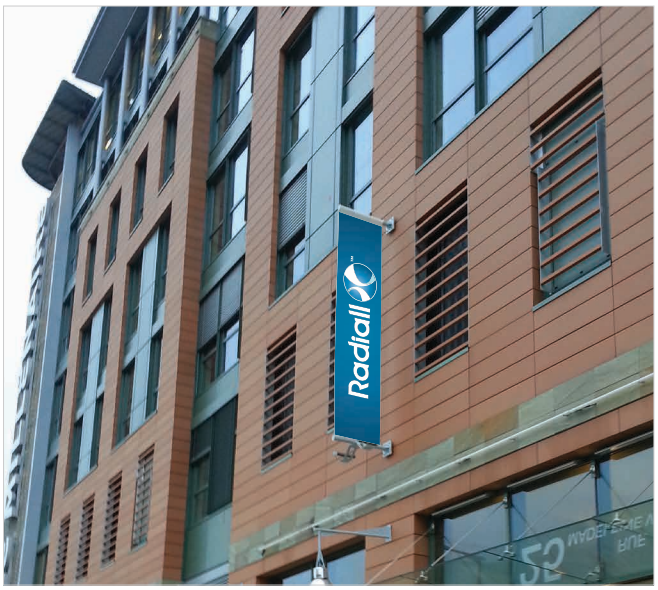

Head office - Aubervilliers France

CAPACITIES & FACILITIES

Radiall's global presence and worldwide facilities offer expertise in the following: marketing, research and development, industrialization, manufacturing and quality control. This strong heritage enables Radiall to produce a range of high performance and low cost devices for industrial applications, and high reliability components for severe requirements in military and space markets.

Introduction

PRODUCTION


Electrical performance of microwave products is determined by machining quality of individual piece parts and associated plating.


Equipped with computer-controlled machinery, and an in-house plating department, Radiall is able to manufacture high quality piece parts that are compatible with existing components.

Due to the thick and thin film etching equipment, Radiall's production department guarantees the quality of the resistive cells used in most terminated switching products. A prototype workshop allows Radiall to quickly respond to special customer request.

All the phases of manufacturing and test are strictly inspected by our quality department, so as to warrant the constancy of our products and to achieve general and specific requirements.

Radiall's quality department inspects products through all phases of manufacturing and testing, to ensure consistency to all products for customer satisfaction.

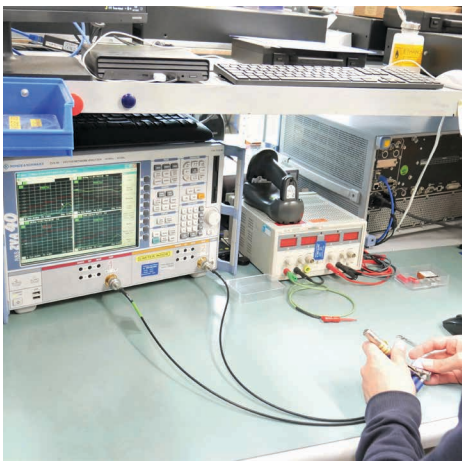

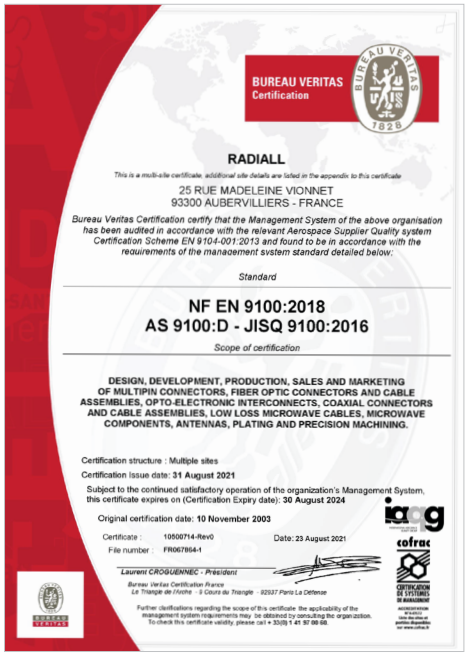

BUREAU VERITAS
Certification

RADIALL

This is a multi-site certificate, additional site details are listed in the appendix to this certificate

25 RUE MADELEINE VIONNET
93300 AUBERVILLIERS - FRANCE

Bureau Veritas Certification certify that the Management System of the above organisation has been audited in accordance with the relevant Aerospace Supplier Quality system Certification Scheme EN 9104-001:2013 and found to be in accordance with the requirements of the management system standard detailed below:

Standard

NF EN 9100:2018
AS 9100:D - JISQ 9100:2016

Scope of certification

DESIGN, DEVELOPMENT, PRODUCTION, SALES AND MARKETING OF MULTIPIN CONNECTORS, FIBER OPTIC CONNECTORS AND CABLE ASSEMBLIES, OPTO-ELECTRONIC INTERCONNECTS, COAXIAL CONNECTORS AND CABLE ASSEMBLIES, LOW LOSS MICROWAVE CABLES, MICROWAVE COMPONENTS, ANTENNAS, PLATING AND PRECISION MACHINING.

Certification structure : Multiple sites
Certification Issue date: **31 August 2021**
Subject to the continued satisfactory operation of the organization's Management System, this certificate expires on (Certification Expiry date): **30 August 2024**
Original certification date: **10 November 2003**
Certificate : 10500714-Rev0 Date: 23 August 2021
File number : FR067864-1

Laurent CROGUENNEC - President

Bureau Veritas Certification France
Le Triangle de l'Arche - 9 Cours du Triangle - 92937 Paris La Défense

Further clarifications regarding the scope of this certificate the applicability of the management system requirements may be obtained by consulting the organization. To check this certificate validity, please call + 33(0) 1 41 97 00 60.

QUALITY, RELIABILITY & PATENTS

Radiall's main focus for passive microwave components are quality and reliability. EN 9100:2018 label is the best evidence of quality assurance interfaces at every stage of a product from designing to manufacturing.

All new products are subject to a rigid qualification program before massive production begins. Additionally, product quality is reviewed and tested periodically.

NATO CODE

Radiall is a qualified microwave components manufacturer under military label (manufacturer code F0503 and F6507), and offers quality assurance developed in accordance with N.A.T.O. standards.

Introduction

A TESTING LABORATORY

As an illustration of Radiall's commitment to quality and reliability, Radiall has an in-house test laboratory which permits Radiall to complete the majority of tests required by customers.


PARTIAL LIST OF TEST MEANS

Electrical




Breakdown Voltage	12 K Volts
Insulation Resistance	40.10^3 M Ohms
Contact Resistance	1 µ Ohms

Environmental

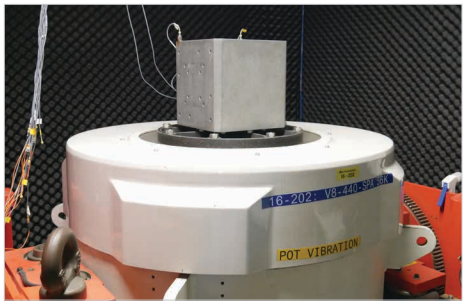

Vibrations: Sine Random	0 - 120 g; 5 to 4,000 Hz
Shocks	30 to 1,000 g
Shakes	25 to 40 g 6 ms
Thermal Vacuum	10^{-5} TORR; -45 to +100 °C
Thermal	-70 °C + 200 °C (Transfert 20 s for Shock Test)
Humidity	20 to 98% HR
Salt Spray	-35 °C to +55 °C
Hermeticity	Helium 10^{-5} to 10^{-8} atm cm^3 /s

Microwave

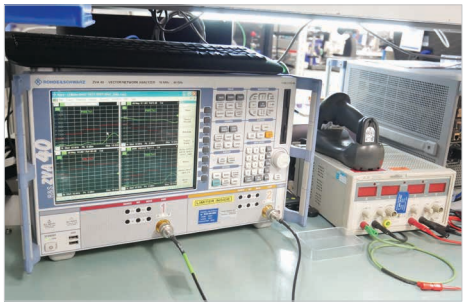

V.S.W.R. Insertion Loss Isolation	Vector Network Analyzer From 0.01 up to 70 GHz
RF Leakage / EMC	Reverberation Chamber Method 0.5 to 40 GHz / Noise 100 dB
Power Handling	400 W CW 0.8 up to 2 GHz 200 W CW 2 up to 4 GHz 20 W CW 8 up to 18 GHz 2,000 Wpp 1 up to 2.5 GHz 2,000 Wpp 2.5 up to 8 GHz

Introduction

CAPABILITIES

Radiall offers a wide variety of coaxial switches to answer customer needs. This catalog is intended to be used as a guide in selecting the right type of switch for a given application. It is important to note that Radiall is not limited to catalog products and has the flexibility to design a specific product on a tight schedule at a reasonable cost. Radiall is always available to discuss specific customer requests.





RELIABILITY

Radiall's coaxial switches offer exceptional reliability and performance. A unique patented design of the actuator and transmission link enables Radiall to guarantee operation up to 10 million cycles for Terminated SPnT and other series as well — with excellent repeatability.





LIST OF APPLICABLE DOCUMENTS

List of related documents covering the general mechanical and environmental tests applicable to the devices described in this catalog.

AIR 7304	NFC 93563	MIL C 39012
DIN 47295	NFC 93564	MIL E 5400
NFC 93561	NFC 96317	MIL STD 202
NFC 93562	MIL DTL 3928	154 IEC

Introduction

GENERAL SPECIFICATIONS DESIGNED TO MEET MIL DTL 3928 & MIL STD 202

ENVIRONMENTAL CHARACTERISTICS

Vibrations Method 204	10 - 2000 Hz 10 g	Operating
Shocks Method 213	50 g, 1/2 Sine	Non-Operating

These requirements are guaranteed according to MIL standard — see applicable product section to get more accurate and detailed information.

MECHANICAL CHARACTERISTICS, MATERIAL & FINISHED

RF Body	Aluminium, Gold-Plated Aluminium, Nickel-Plated Aluminium with Cr3 Passivation
Contacts	Beryllium Copper, Gold-Plated
Insulator	PTFE, ULTEM 1000
Connectors	Stainless Stess, Passivated Brass, Nickel-Plated
Construction	Splash Proof
Cover	Aluminium, Blue Anodized

All materials and finishes are in accordance with applicable MIL and NF specifications. All connectors are in accordance with applicable MIL, DIN, NF and CEI specifications. All dimensions in this catalog are given in millimeters. The non specified dimensions are given within +/- 0.5 mm.

MANUFACTURING & QUALITY ASSURANCE


Radiall's RF switches product line is made of approximately 20 series of switches, with each series divided into a large number of configurations. Part numbers consist of 9 digits, each digit designating a portion of the part's actual identity (such as series, frequency, actuator voltage, etc.).

For each digit, 2 to 10 options are available. A complete part number represents a unique configuration.

Overall, there are more than 22000 different configurations available with very few subassemblies due to the modularity of the RAMSES switching line (less than 300 different subassemblies).

A Push-Pull manufacturing process has been implemented to reduce both lead time and inventory. Based upon marketing forecast and monthly updates, various subassemblies are manufactured.

When an order is received, an automated MRP system selects the appropriate subassemblies from stock to manufacture the requested products within a short time frame (a few days to a few weeks) depending on the complexity of the product.

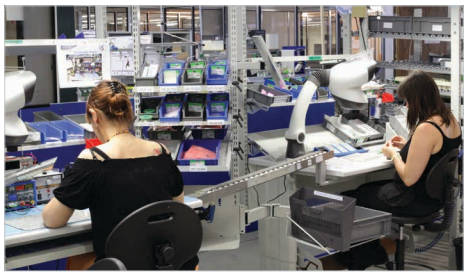

Radiall has adopted the process management philosophy of "Lean Manufacturing." This process enables the best possible price and lead times on coaxial products by eliminating unnecessary stages of the administrative processes. The lean manufacturing concept was first applied to the RAMSES SPDT and SP6T non-terminated coaxial products and is now being expended over all coaxial switches.

PACKAGING

All our coaxial switches are packed in a Korrvu packaging. For electromagnetic sensitive switches we also use ESD packet.




TRACEABILITY

All our coaxial switches are equipped with a barcode for better traceability. Titanium and Platinum series switches are also equipped with a serial number.

MANUFACTURING & QUALITY ASSURANCE FLOW

QUALITY

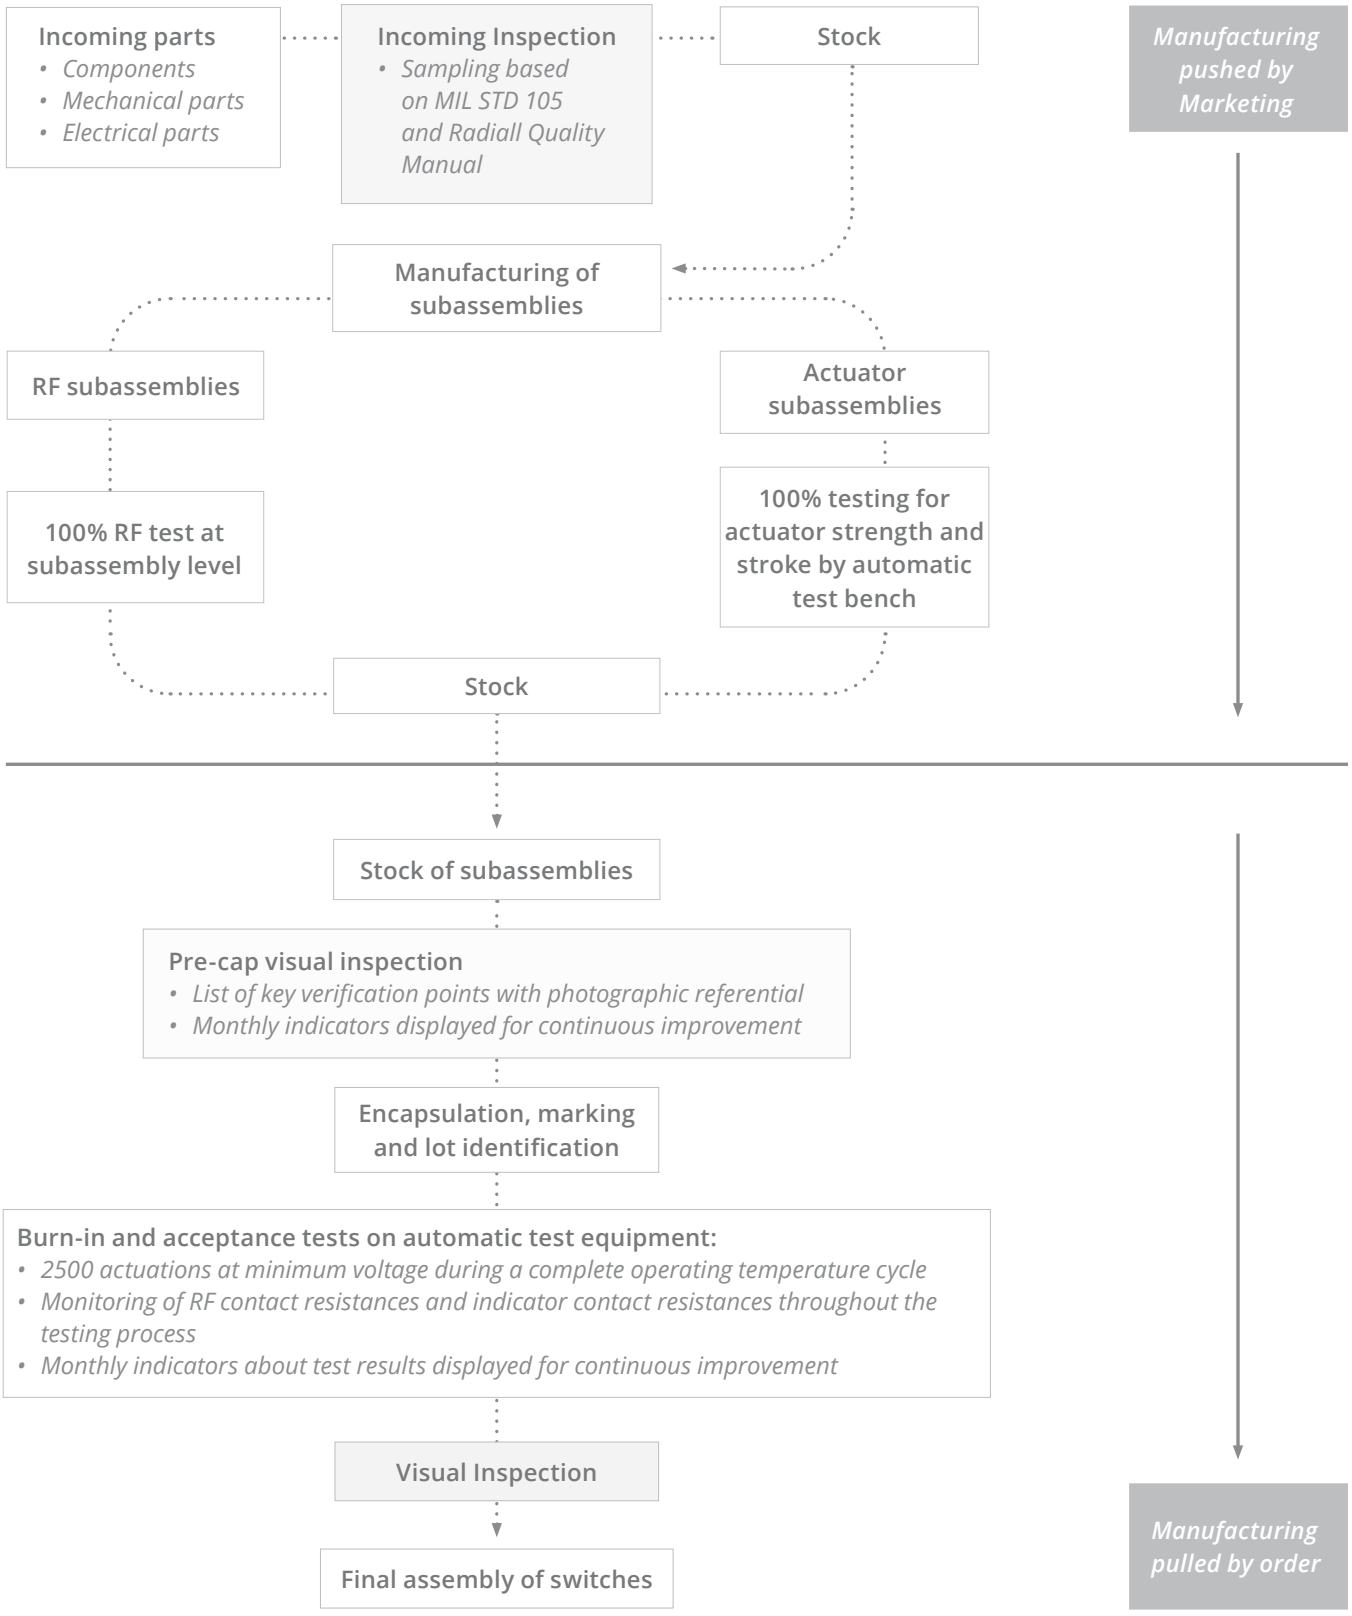


Introduction


RAMSES CONCEPT

An innovative system has been designed for constructing electromechanical coaxial RF switches with increased long-term reliability. Radiall's Modular System for Electromechanical Switches (RAMSES) is a patented concept that enables microwave coaxial switches to be produced with a typical operating life of 10 million cycles while suffering no decrease in contact resistance reliability over time. In addition, the unique internal construction makes the switches cost-competitive with traditional switches.

FIG. 1: CONVENTIONAL SWITCH CONTACTS AFTER ONE MILLION CYCLES

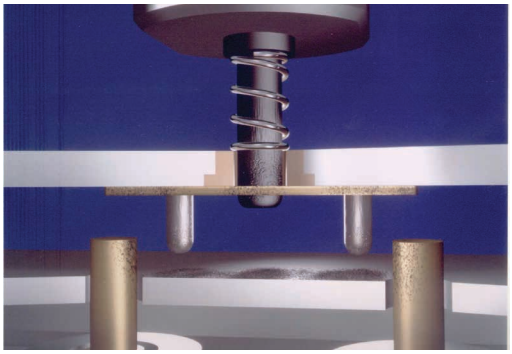

(a) RF line open

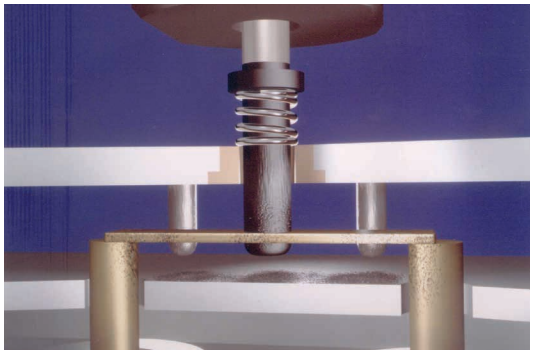

(b) RF line closed

FRICTION EFFECTS

The unique design of RAMSES is based on the reduction of friction, which minimizes particle deposits that can interfere with the transmission of lower frequency signals (up to 3 GHz).

This particle elimination effect is particularly important for telecommunication applications that are currently in the 900 MHz and 6 GHz range. In addition, the design involves fewer components compared to other microwave switches, making it quick and easy to assemble.

These savings directly relate to lower cost for improved performance. Many of the existing coaxial electromechanical switches also are able to function mechanically for 10 million operations.

However, the reliability and quality of the electrical contact can decrease over the life cycle.

In general, these traditional switches operate by moving a rectangular switching blade section inside a rectangular cavity. The blades are linked with pushers constructed of dielectric material that travel inside an access hole between the RF cavity and switch actuator. The pushers are directed by dielectric material guides. These dielectric parts rub on the blades and inside the access hole and generate isolating particles in the RF cavity that pollute the electrical contacts and ultimately cause running defects.

Figure 1 shows the build-up of minute dielectric particles on a set of conventional switch contacts after one million cycles. These defects are not particularly noticeable at very high frequencies since the contact is established by a capacitive effect. However, the insertion loss of the contacts increases considerably at lower frequencies (3 GHz below).

Introduction

A NEW ACTUATOR CONFIGURATION

To eliminate this problem of increased insertion loss in the contacts, RAMSES devices incorporate a patented system. This system, compresses two parallel blades suspended from a bearer, which enables the guiding and positioning of the commutation blades to be accomplished entirely outside the RF cavity. These blades impose a rectilinear motion on the switching pusher, suppressing both friction and the production of particles inside the RF cavity. The unique system is extremely small and can be used in all of RAMSES series switches.

FIG. 2: CUTAWAY VIEW






FIG. 3: A RAMSES SET OF CONTACTS

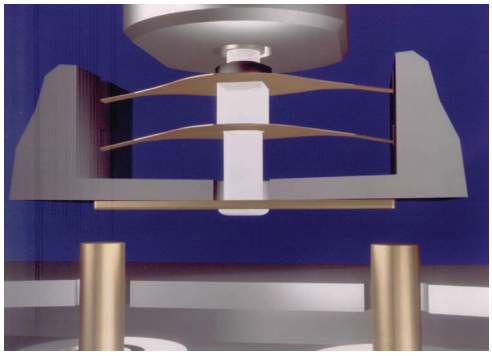

(a) RF line open

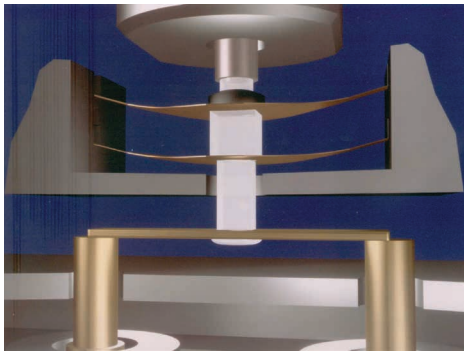

(b) RF line closed

Figure 2 shows a cutaway view of a RAMSES coaxial switch displaying the actuator mechanism. A second improvement involves a new rectilinear actuator design using high energy magnets and a switching performance in relation to its size.


The system is used in the production of both failsafe and latching actuators, depending on how it is applied in the switch. These actuators are either 500 g locking forces or 300 to 800 g current forces for a power consumption of 100 mA at 28 V.


The new actuator has the added advantage of very low magnetic leakage, allowing actuators to be used in close proximity to one another without performance degradation. The use of a dry, solid lubricant and the control of friction areas provide an actuator life expectancy of over 50 million operations without defect when temperature range exceeds -40 ° to +85 °C.

SWITCH PERFORMANCE

RAMSES series switches have successfully survived tests of 10 million switching temperature cycles from -55 ° to + 85 °C while demonstrating good contact resistance stability. Visual inspection of these switches after testing has indicated that the RF lines were free of much of the contamination found during similar tests on traditional switches. A comparison of the actual measured contact resistance obtained from monitoring both conventional and RAMSES switches using several parts that have already been actuated one million cycles is shown in figure 4. Although the conventional switch may not be considered failure, its contact resistance has become unstable, thus degrading its reliability.

FIG. 4: A COMPARISON OF (A) CONVENTIONAL & (B) RAMSES SWITCH DESIGN CONTACT RESISTANCE DURING ONE MILLION CYCLES

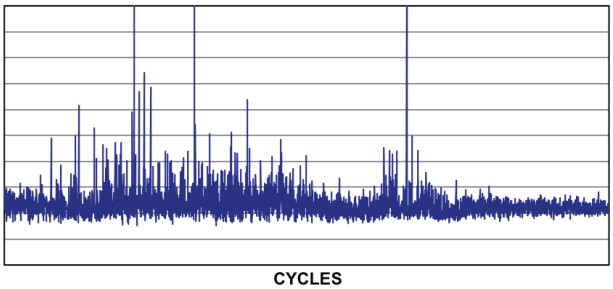


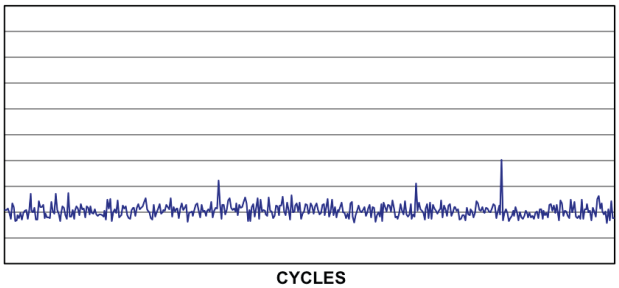

RF ARRANGEMENT

COAXIAL SPDT SWITCH


(Single Pole Double Throw)



- A switch with one input port and two selectable output ports.

COAXIAL SPDT TERMINATED SWITCH


(Single Pole Double Throw Terminated)

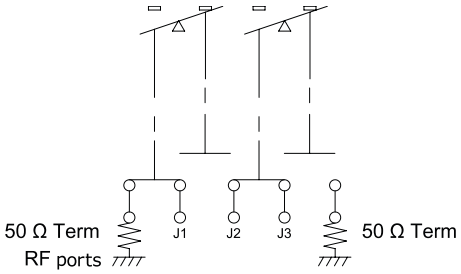

- Same as SPDT, but the unused output port is automatically terminated by a 50 Ohm resistive load.

COAXIAL DP3T SWITCH


(Double Pole Three Throw)



- A switch with two input ports and three output ports. Each input (J2 - J4) can be switched between two adjacent outputs with one output being common to both inputs.

COAXIAL DPDT SWITCH


(Double Pole Double Throw)



- A four port switch with two independent paths that operate simultaneously in one of two selected positions. In a DPDT/Transfer switch, the two transmission paths are provided as shown above.

COAXIAL MULTIPOSITION SWITCH


(Single Pole n Throw - n<13)

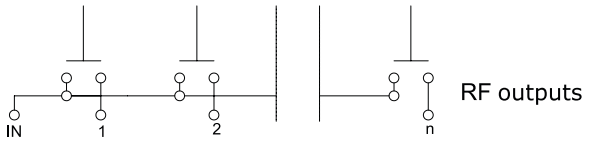

- A switch with one input port and more than two output ports. The multiposition switch allows direct access to any individual output port by energizing the respective actuator. Radiall SPnT switches provide up to 12 output ports.

COAXIAL MULTIPOSITION TERMINATED SWITCH

(Single Pole n Throw Terminated - n<13)

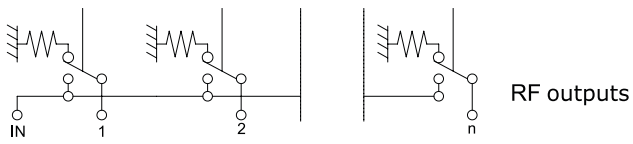

- Same as SPnT, but each unused output port is automatically terminated in an internal 50 Ohm resistive load.

GLOSSARY

Actuator Voltage: All RAMSES series relays are either 12 or 28 Vdc nominal voltage over the entire temperature range. The switches can be operated with a voltage between -15 % and +10 % of the nominal value. Other voltage as 5, 15 or 24 Volts can be supplied at the customer's request.

Automatic "Reset": All Latching version multiposition switches (or SPnT) cause the following scenario:

When a RF path is closed, it remains in the closed position after the voltage is cut-off (latching function). To switch to another path, the first path must be opened via a "RESET" driver, followed by the closing of the second RF path. Without the "RESET" driver, both paths would remain in the ON position at the same time.

To simplify the use of latching products, an "automatic RESET" is recommended. The auto reset feature is accomplished by an electronic circuit which brings about the automatic opening of a previously closed path during changes of position of the switches.

This option produces a higher current consumption during a few milliseconds (see voltage and current values listed on the product's individual technical data sheet).

BCD (BINARY CODE DECIMAL) DRIVER INTERFACE

BCD LOGIC CODING				RF AND MICROWAVE WAYS POSITION
E4	E3	E2	E1	
0	0	0	0	Latching Models: All Ways in "OFF" Position
0	0	0	0	Normally Open Models: Memory of Last Position
0	0	0	1	Way IN - 1 in "ON" Position
0	0	1	0	Way IN - 2 in "ON" Position
0	0	1	1	Way IN - 3 in "ON" Position
0	1	0	0	Way IN - 4 in "ON" Position
0	1	0	1	Way IN - 5 in "ON" Position
0	1	1	0	Way IN - 6 in "ON" Position
0	1	1	1	Way IN - 7 in "ON" Position
1	0	0	0	Way IN - 8 in "ON" Position
1	0	0	1	Way IN - 9 in "ON" Position
1	0	1	0	Way IN - 10 in "ON" Position
1	0	1	1	Way IN - 11 in "ON" Position
1	1	0	0	Way IN - 12 in "ON" Position
1	1	1	1	Normally Open Models: All Ways are in "OFF" Position

E1, E2, E3, E4 are BCD driver pins of the product. E4 applies only with 8 positions or more. E3 applies only 4 positions or more.

Break-Before-Make: Radiall coaxial relays are considered "break-before-make". In a break-before-make product the contact of the first path leaves its state before the final contact has been established.

Failsafe: A switch with an actuator that contains a return mechanism, either mechanical or magnetic, that provides RF connection to one selected position when no voltage is applied to the power terminals. This type of switch requires continuous voltage to maintain RF connection to any other position.

Frequency Range: The frequency range for each device indicates the maximum frequency Radiall will guarantee for the products performance.

Indicator Contacts: Electrical contacts of an "open circuit, short-circuit" type, mechanically linked to the actuator and synchronized with switched RF paths, ensure the recopy of positions of RF transmission paths. When a microwave path is switched, the corresponding indicator contact is closed. It is generally used with pilot lamps to indicate position of RF contacts (characteristics are given for a resistive load).

Introduction

Intermodulation (PIM): or intermod for short, is a form of signal distortion that occurs whenever signals of two or more frequencies are produced in a passive device which contains nonlinear response. This interference includes low contact pressure, dirty interconnects, magnetic materials or other anodic effect. The typical value for Radiall switches is around 120 dBc, except for SMT relays which is 110 dBc (with 2 carriers at +43 dBm), however products can be designed for higher performance upon request.

Isolation: The RF leakage from a connected path to any connector outside that path. Isolation is measured in decibels below the input power.

Latching: A switch with an actuator that contains a mechanism, either mechanical or magnetic, that will maintain a chosen RF contact path (whether voltage is maintained or not) after switching is accomplished. A pulse length of a duration equal to the maximum switching time is enough to change the switch position.

Life: Number of toggles a product is able to carry out. Relays and switches of RAMSES, PLATINUM and TITANIUM ranges have a life cycle of 2 to 10 million cycles.

Normally Open: A mode of operation in which all output ports of the switch are disconnected from the input port until a voltage is applied to a selected position.

<table>
<tr><th rowspan="2">SWITCHES FAMILY</th><th colspan="2">TYPE OF</th><th rowspan="2">PIN NUMBER</th><th rowspan="2">COMMENTS</th></tr>
<tr><th>SERIES</th><th>CONNECTOR</th></tr>
<tr><td>RAMSES SPDT</td><td>SPDT = R570</td><td>D-Sub (Male)</td><td>9 Pins</td><td>Available only on products described on page 2-16</td></tr>
<tr><td>PLATINUM SPDT</td><td>SPDT = R595</td><td>D-Sub (Male)</td><td>9 Pins</td><td>Non-Terminated Models</td></tr>
<tr><td>RAMSES DPDT</td><td>DPDT = R577</td><td>D-Sub (Male)</td><td>9 Pins</td><td>-</td></tr>
<tr><td>TITANIUM DPDT</td><td>DPDT = R513</td><td rowspan="2">HE10 Ribbon Receptacle (Male)</td><td rowspan="2">10 Pins</td><td rowspan="2">Delivered with Ribbon Cable 750 mm (30 inches) + HE10 Connector (Female)</td></tr>
<tr><td>PLATINUM DPDT</td><td>DPDT = R593</td></tr>
<tr><td>RAMSES DP3T [1]</td><td>DP3T = R585</td><td colspan="2">N/A</td><td>Only Solder Pins</td></tr>
<tr><td>PLATINUM DP3T [1]</td><td>DP3T = R595</td><td>D-Sub (Male)</td><td>9 Pins</td><td>-</td></tr>
<tr><td rowspan="4">RAMSES & Subminiature SPnT</td><td>SPnT = R573/R574
3 to 10 Positions</td><td rowspan="3">D-Sub (Male)</td><td rowspan="2">25 Pins</td><td rowspan="2">-</td></tr>
<tr><td>SPnT = R523/R524
8 and 10 Positions</td></tr>
<tr><td>SPnT = R573/R574
and R523/R524
12 Positions</td><td>44 Pins</td><td>High Density</td></tr>
<tr><td>SPnT = R591
4 and 6 Positions</td><td>Micro-D Receptacle (Female)</td><td>9 Pins</td><td>-</td></tr>
<tr><td>TITANIUM SPnT</td><td>SPnT = R514
4 and 6 positions</td><td rowspan="2">HE10 Ribbon Receptacle (Male)</td><td rowspan="2">16 Pins</td><td rowspan="2">Delivered with Ribbon Cable 750 mm (30 inches) + HE10 Connector (Female)</td></tr>
<tr><td>PLATINUM SPnT</td><td>SPnT = R594
4 and 6 positions</td></tr>
</table>

Notes

1. Terminated RAMSES and PLATINUM SPDT are included in R585 and R595.


Introduction

Polarity: A common negative polarity is chosen by Radiall for its standard products. An inverted polarity (positive common) is available on RAMSES range; contact Radiall for availability.


RF Power Chart: The RF power rating is the capability of handling RF power (CW power) through closed contacts. The RF power should be removed during switching. Power ratings assume unity V.S.W.R. (matched load) at room temperature (25 °C), sea level pressure (14.7 p.s.i.) and cold switching. See below the CW power capability vs. Frequency Chart. Changes in these specifications require power derating (see derating factor versus V.S.W.R.).

This graph is based on the following conditions:

- *Ambient temperature: +25 °C*
- *Sea Level*
- *V.S.W.R.: 1:1 and cold switching*

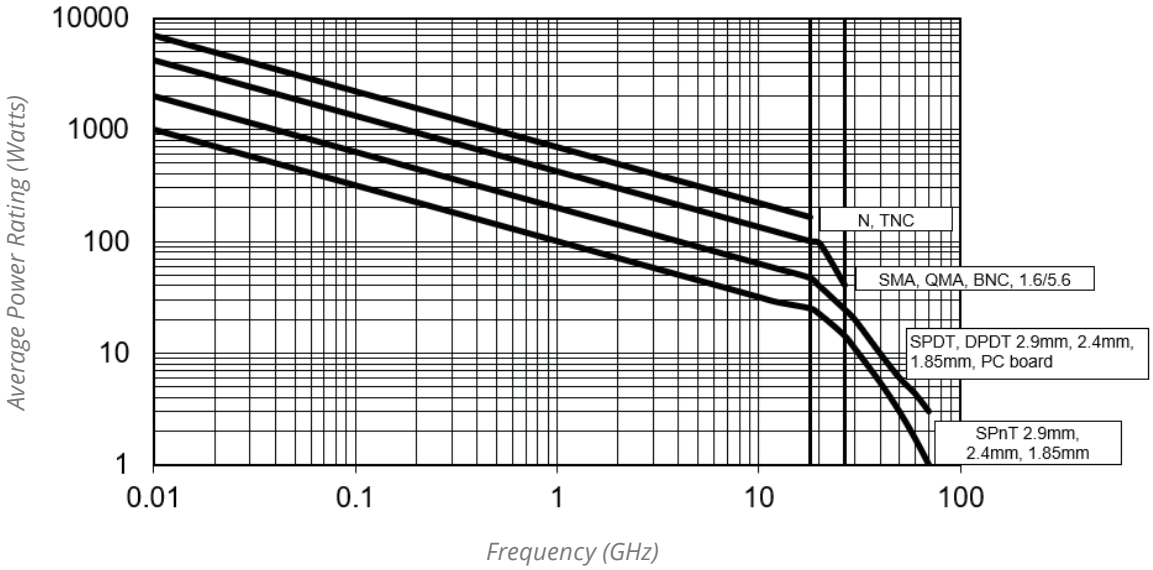

Derating Factor: The average power input must be reduced for load V.S.W.R. above 1:1.

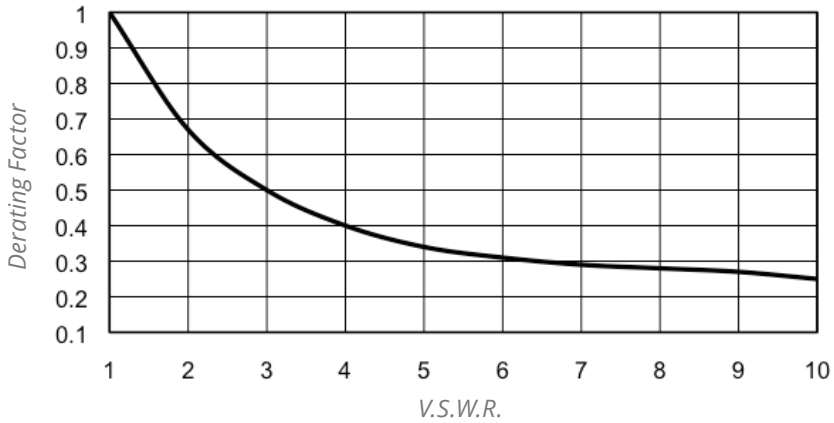

Notes

For PLATINUM and TITANIUM series, common plus polarity potential is chosen for its standard products.

Introduction

Peak Power Handling: The maximum peak power, when applied at room temperature under a pulse of one microsecond every millisecond, will not permanently change the specifications of the switch. Power applied over this limit will alter the RF performance of the switch.

Repeatability: The maximum standard deviation in insertion loss specifications on each path over the life of the product. Insertion loss repeatability is specified for all PLATINUM series (0.03 dB over 10 million) and all TITANIUM series (0.03 dB over 2.5 million).

RF Connectors: RF connectors are 50 or 75 Ohms female, unless otherwise specified. The applicable mating dimensions, materials and finish are in accordance with applicable sections of international standard (MIL C 39012, DIN 47295). NB RADIALL 75 Ohm coaxial switches are only available with DIN 1.6/5.6 (screw, snap and slide connector) and mini SMB RF connectors.

Self Cut-Off: The ability of a switch to disconnect the actuator voltage as soon as the switching of the position is carried out. The system applies to latching relays and is achieved with solid state circuitry. Self Cut-Off time for our RAMSES coaxial switches is from 40 ms to 120 ms.

Solder Pin: RAMSES relays are equipped with solder pins for the control and indicator contacts. The maximum temperature during soldering should not exceed 250 °C for 30 seconds or 300 °C for 10 seconds for lead-free soldering process.

Suppression Diodes: Diodes connected in parallel with the coil of a switch to suppress transient voltage generated by the self inductance of the coil during the driver signal cut-off. This option is systematically enclosed in all TTL, Self Cut-Off and all electronic interfaces.

Switching Time: The total amount of time between applying voltage to the actuator terminals and the completion of switching (including all contact bounce — if any). Total switching time consists of three parts, namely inductive delay in the actuator coil, transfer time of the RF contacts, and bounce time of the RF contacts.

TTL Driver Interface: The interface of an electronic circuit which enables driving either relays or switches by TTL logic signals. Products equipped with this option have a pin for the voltage of the actuator (12 V or 28 V) as well as a TTL driver pin shared per position. The polarity is not relevant to applications for switches with this option. The logic used is positive, therefore high level nominal +5 V (2.2 to 5.5 V) of TTL signal means logic “1” which enables the corresponding microwave way. Low level i.e logic contacts 0, voltage is 0-0.8 V. Selected position of switches with TTL driver are controlled by a TTL high level.

V.S.W.R.: The Voltage Standing Wave Ratio is a measure of the return loss or level of the reflected signal of a device connected on a transmission line. V.S.W.R. is linked to the coefficient of reflection (r) by the equation:

$$VSWR = \frac{1+/r/}{1-/r/} \qquad r = \frac{Z-Zo}{Z+Zo}$$

V.S.W.R. varies from 1 to ∞, a value equal to 1 represents a perfect matching where:


- “r” is the coefficient of reflection.
- “Zo” is the characteristic impedance of the line.
- “Z” is the impedance of the line.

Introduction


RF REPEATABILITY & LIFE TEST PARAMETERS

Radiall has built an Automatic Test Bench composed by a Vector Network Analyzer (VNA), Digital Multi-Meters (DMM), PC and a switch driver. This approach is to qualify over the complete life of the switch (2.5 million to 10 million cycles depending on switch models). This ATE extracts and stores the RF parameters or contacts resistances of the switch according to our own internal procedure. For each frequency point a calculation of VSWR, insertion loss and standard deviation are computed. All measurements are performed at room temperature (RF switch is toggled at 3 Hz).

The curves in 3D illustrate the RF characteristics over 10 million switching cycles on SP6T-26.5 GHz RAMSES switch.

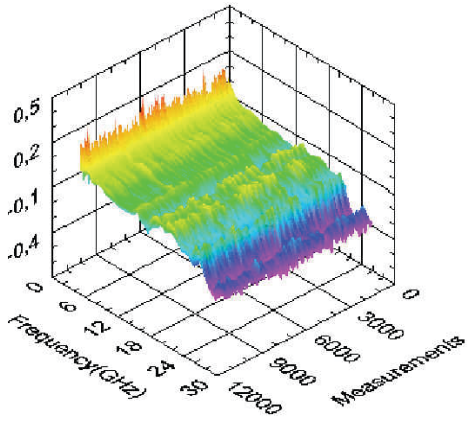

Insertion loss over 10 million cycles

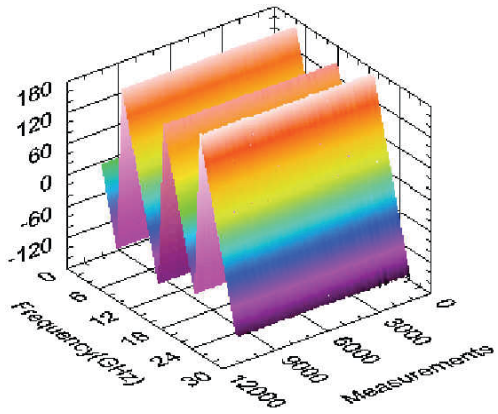

Phase over 10 million cycles


The contribution due to only Rc can be calculated as follows:

$$RL = 20 \log_{10} |\Gamma| = 20 \log_{10} \frac{Rc}{2\,Ro + Rc}$$

$$VSWR = 1 + \frac{Rc}{Ro}$$

$$IL = 10 \log_{10} \frac{Ro}{Ro + Rc}$$

The following curve shows RF contact resistance up to 10 million. Switch was toggled at 3Hz with Rc recorded each 50 cycles.

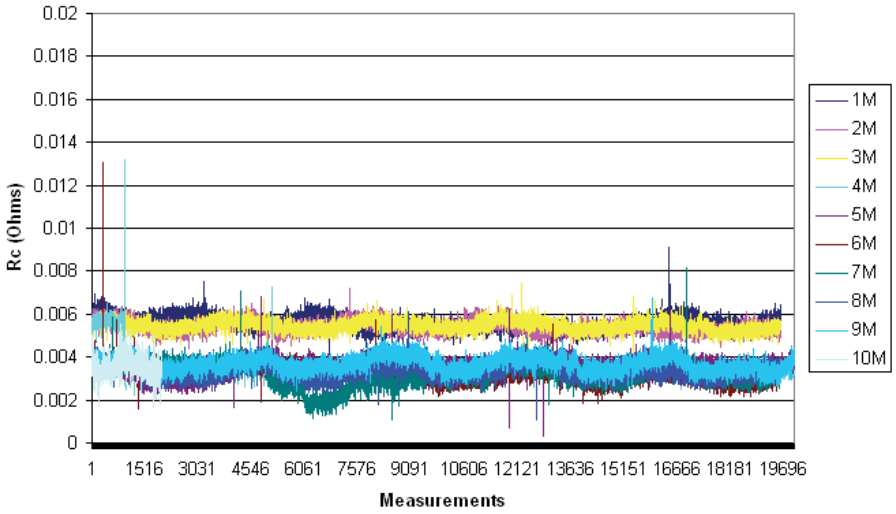

CONVERSIONS

CONVERSION MEASUREMENT UNIT

- Convert inch to millimeters: 1 in = 25.4 mm/1 m = 39.3 in
- Convert centimeters to feet: 1 ft = 30.40 cm/1 m = 3.28 ft
- Convert kilogram to pounds: 1 kg = 2.20 Lb/1 lb = 0.45 kg

REFLECTION COEFFICIENT RETURN LOSS CONVERSION

- Reflection coefficient (ρ)
- Standard wave ratio (1 + ρ) / (1 - ρ)
- Return loss (dB) (-20 $\log_{10}\rho$)

REFLECTION COEFFICIENT	V.S.W.R.	RETURN LOSS (dB)	REFLECTION COEFFICIENT	V.S.W.R.	RETURN LOSS (dB)
0	1.00	∞	0.195	1.48	14.2
0.01	1.02	40.0	0.2	1.5	14.0
0.015	1.03	36.5	0.205	1.52	13.8
0.02	1.04	34.0	0.21	1.53	13.6
0.025	1.05	32.0	0.215	1.55	13.4
0.03	1.06	30.5	0.22	1.56	13.2
0.035	1.07	29.1	0.225	1.58	13.0
0.04	1.08	28.0	0.23	1.6	12.8
0.045	1.09	26.9	0.235	1.61	12.6
0.046	1.10	26.7	0.24	1.63	12.4
0.05	1.11	26.0	0.245	1.65	12.2
0.055	1.12	25.2	0.25	1.67	12.0
0.06	1.13	24.4	0.255	1.68	11.9
0.065	1.14	23.7	0.26	1.7	11.7
0.07	1.15	23.1	0.265	1.72	11.5
0.075	1.16	22.5	0.27	1,74	11.4
0.08	1.17	21.9	0.275	1.76	11.2
0.085	1.19	21.4	0.28	1,78	11,1
0.09	1.20	20.9	0.285	1.80	10.9
0.095	1.21	20.4	0.29	1.82	10.8
0.1	1.22	20.0	0.295	1.84	10.6
0.105	1.23	19.6	0.3	1.86	10.5
0.11	1.25	19.2	0.305	1.88	10.3
0.115	1.26	18.8	0.31	1.90	10.2
0.12	1.27	18.4	0.32	1.94	9.9
0.125	1.29	18.1	0.33	1.99	9.6
0.13	1.30	17.7	0.34	2.03	9.4
0.135	1.31	17.4	0.35	2.08	9.1
0.14	1.33	17.1	0.36	2.13	8.9
0.145	1.34	16.8	0.37	2.17	8.6
0.15	1.35	16.5	0.38	2.23	8.4
0.155	1.37	16.2	0.39	2.28	8.2
0.16	1.38	15.9	0.4	2.33	8.0
0.165	1.4	15.7	0.41	2.39	7.7
0.17	1.41	15.4	0.42	2.45	7.5
0.175	1.42	15.1	0.43	2.51	7.3
0.18	1.44	14.9	0.44	2.57	7.1
0.185	1.45	14.7	0.45	2.64	6.9
0.19	1.47	14.4	0.5	3.00	6.0

Introduction

POWER CONVERSION

dBm = 10 × Log_{10} P (milliwatts)
P (milliwatts) = 10^ (dBm/10)

POWER (dBm)	POWER (W)	POWER (dBm)	POWER (W)
-49	0.01 µW	1	1.26 mW
-48	0.02 µW	2	1.58 mW
-47	0.02 µW	3	2.00 mW
-46	0.03 µW	4	2.51 mW
-45	0.03 µW	5	3.16 mW
-44	0.04 µW	6	3.98 mW
-43	0.05 µW	7	5.01 mW
-42	0.06 µW	8	6.31 mW
-41	0.08 µW	9	7.94 mW
-40	0.10 µW	10	10 mW
-39	0.13 µW	11	12.59 mW
-38	0.16 µW	12	15.85 mW
-37	0.20 µW	13	19.95 mW
-36	0.25 µW	14	25.12 mW
-35	0.32 µW	15	31.62 mW
-34	0.40 µW	16	39.81 mW
-33	0.50 µW	17	50.12 mW
-32	0.63 µW	18	63.10 mW
-31	0.79 µW	19	79.43 mW
-30	1 µW	20	100 mW
-29	1.26 µW	21	125.89 mW
-28	1.58 µW	22	158.49 mW
-27	2 µW	23	199.53 mW
-26	2.51 µW	24	251.19 mW
-25	3.16 µW	25	316.23 mW
-24	3.98 µW	26	398.11 mW
-23	5.01 µW	27	501.19 mW
-22	6.31 µW	28	630.96 mW
-21	7.94 µW	29	794.33 mW
-20	10 µW	30	1 W
-19	12.59 µW	31	1.26 W
-18	15.85 µW	32	1.58 W
-17	19.95 µW	33	2 W
-16	25.12 µW	34	2.51 W
-15	31.62 µW	35	3.16 W
-14	39.81 µW	36	3.98 W
-13	50.12 µW	37	5.01 W
-12	63.10 µW	38	6.31 W
-11	79.43 µW	39	7.94 W
-10	100.00 µW	40	10 W
-9	125.89 µW	41	12.59 W
-8	158.49 µW	42	15.85 W
-7	199.53 µW	43	19.95 W
-6	251.19 µw	44	25.12 W
-5	316.23 µW	45	31.62 W
-4	398.11 µW	46	39.81 W
-3	501.19 µW	47	50.12 W
-2	630.96 µW	48	63.10 W
-1	794.33 µW	49	79.43 W
0	1 mW	50	100 W

TEMPERATURE EQUIVALENCE

Temp (°C) = ((°F - 32) x 5)) / 9
Temp (°F) = ((9 x °C) / 5) + 32

°C	°F	°C	°F	°C	°F
-80	-112.0	22	71.6	73	163.4
-70	-94.0	23	73.4	74	165.2
-60	-76.0	24	75.2	75	167.0
-50	-58.0	25	77.0	76	168.8
-45	-49.1	26	78.8	77	170.6
-40	-40.0	27	80.6	78	172.4
-35	-31.0	28	82.4	79	174.2
-30	-22.0	29	84.2	80	176.0
-25	-13.0	30	86.0	81	177.8
-20	-4.0	31	87.8	82	179.6
-19	-2.2	32	89.6	83	181.4
-18	-0.4	33	91.4	84	183.2
-17	1.4	34	93.2	85	185.0
-16	3.2	35	95.0	86	186.6
-15	5.0	36	96.8	87	188.8
-14	6.8	37	98.6	88	190.4
-13	8.6	38	100.4	89	192.2
-12	10.4	39	102.2	90	194.0
-11	12.2	40	104.0	91	195.8
-10	14.0	41	105.8	92	197.6
-9	15.8	42	107.6	93	199.4
-8	17.6	43	109.4	94	201.2
-7	19.4	44	111.2	95	203.0
-6	21.2	45	113.0	96	204.8
-5	23.0	46	144.8	97	206.6
-4	24.8	47	116.6	98	208.4
-3	26.6	48	118.4	99	210.2
-2	28.4	49	120.2	100	212.0
-1	30.2	50	122.0	105	221.0
0	32.0	51	123.8	110	230.0
1	33.8	52	125.6	115	239.0
2	35.6	53	127.4	120	248.0
3	37.4	54	129.2	130	266.0
4	39.2	55	131.0	140	284.0
5	41.0	56	132.8	150	302.0
6	42.8	57	134.6	160	320.0
7	44.6	58	136.4	170	338.0
8	46.4	59	138.2	180	356.0
9	48.2	60	140.0	190	374.0

°C	°F	°C	°F	°C	°F
10	50.0	61	141.8	200	392.0
11	51.8	62	143.6	250	482.0
12	53.6	63	145.4	300	572.0
13	55.4	64	147.2	350	662.0
14	57.2	65	149.0	400	752.0
15	59.0	66	150.8	500	932.0
16	60.8	67	152.6	600	1112.0
17	62.6	68	154.4	700	1292.0
18	64.4	69	156.2	800	1472.0
19	66.2	70	158.0	900	1652.0
20	68.0	71	159.8	1000	1832.0
21	69.8	72	161.6	-	-

DERATING TEMPERATURE INFORMATION

The temperature at which the switches are used has an effect on the coil resistance. This is due to the temperature and variation of the resistivity of copper and the pick up voltage.

Formula of the variation of coil resistance versus the temperature is:

- *R' = R (1 + K (t' – t))*
- *K = Temperature coefficient (0.0038 for copper)*
- *R = Coil resistance (ohms) at temperature t (°C)*
- *R' = Coil resistance (ohms) at temperature t' (°C)*

Example of calculation:

Device: SPDT Failsafe R570413000

How to calculate current at 70 °C with this relay?
In reference to specifications outlined in the technical data sheet:

- *Coil resistance 275 Ohms at 25 °C (R = 275, t = 25, t' = 70)*
- *Nominal current = 102 mA at 25 °C*
- *Nominal voltage = 28 volts*

New coil resistance at 70 °C will be:

- *R' = 275 (1 + 0.0038 (70 – 25))*
- *R' = 275 x 2.71*
- *R' = 323 Ohms*


According to the Ohm law (U = R I), at 70 °C:

- *U = R x I*
- *I = 87 mA*


COIL RESISTANCE VALUE VERSUS TEMPERATURE

The following graphs are examples of calculation for the same product R570413000 (SPDT SMA).

MAXIMUM PICK UP VOLTAGE VERSUS TEMPERATURE

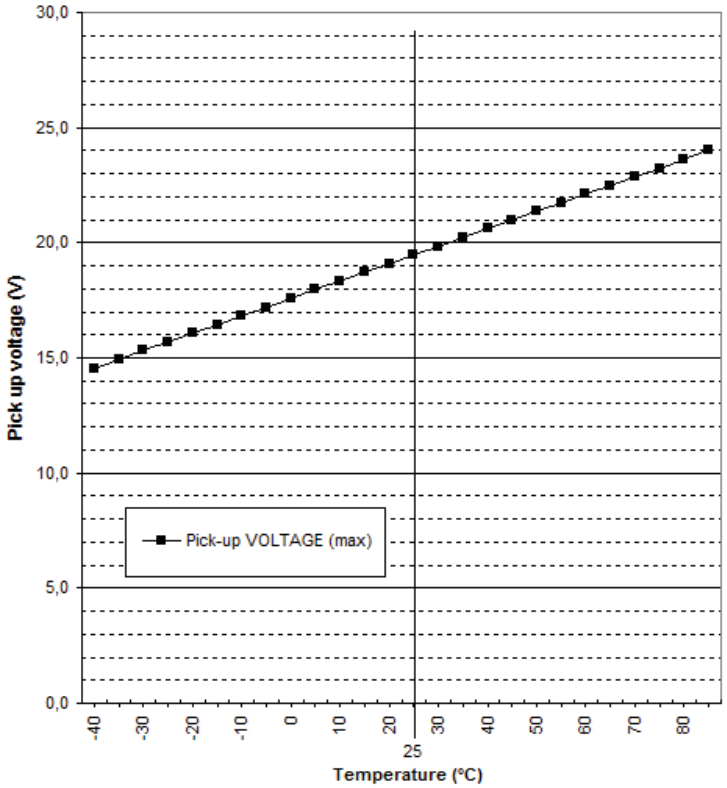


CURRENT VALUE VERSUS VOLTAGE OVER TEMPERATURE RANGE

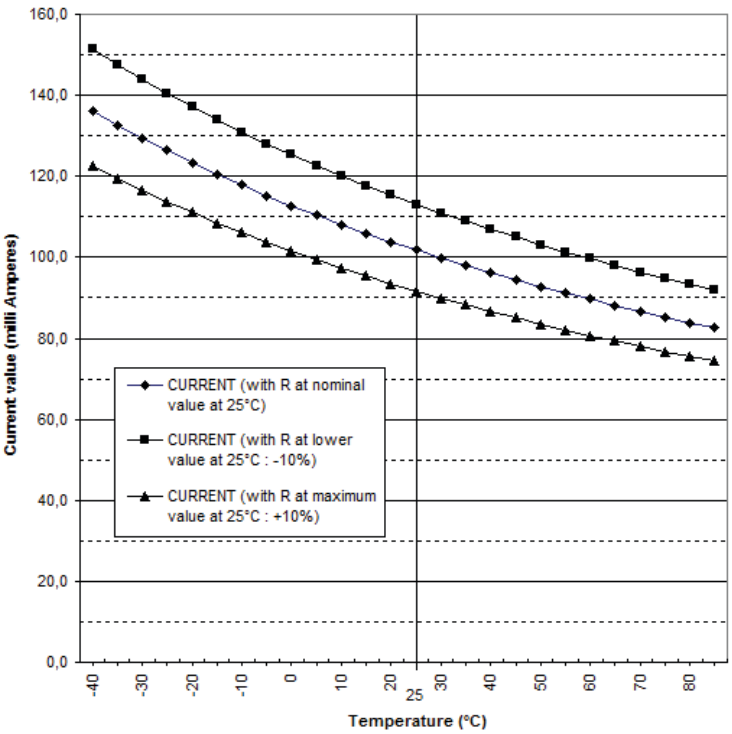


For customer support and more technical information contact a Radiall sales representative.

Introduction

COIL RESISTANCE VALUE VERSUS TEMPERATURE

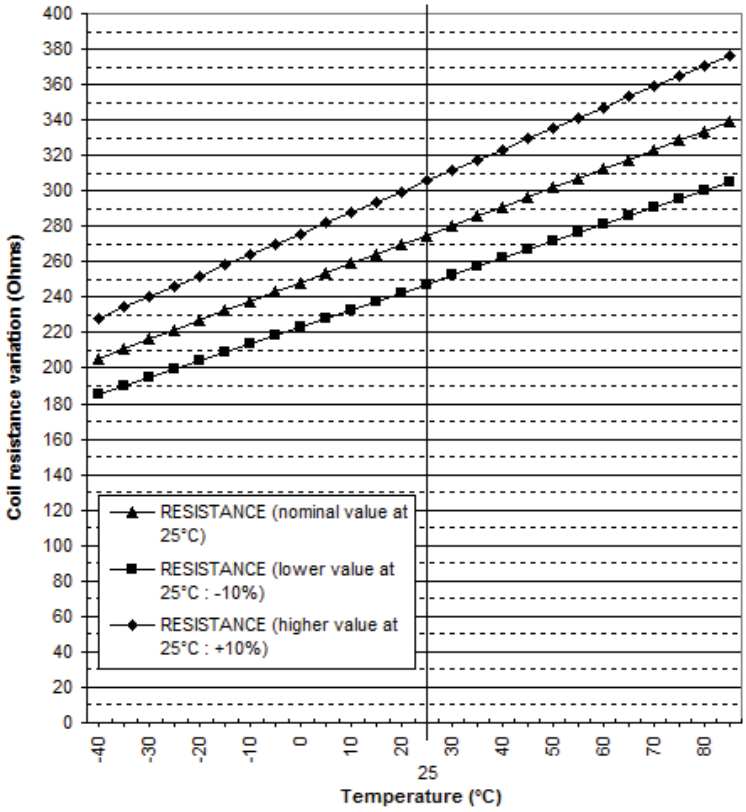

MAXIMUM PICK UP VOLTAGE VARIATION VERSUS TEMPERATURE

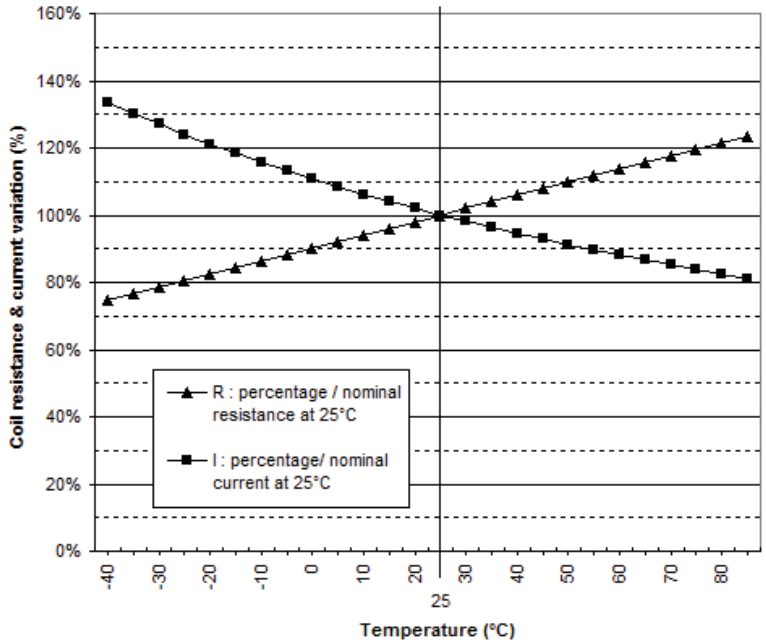


Introduction

USER HANDBOOK

FOR CONNECTOR ASSEMBLY ON COAXIAL SWITCHES

When connecting RF coaxial connectors to Radiall switches precaution should be taken to avoid irreversible damage on the RF switches.

Use only connectors with the correct interface dimensions.

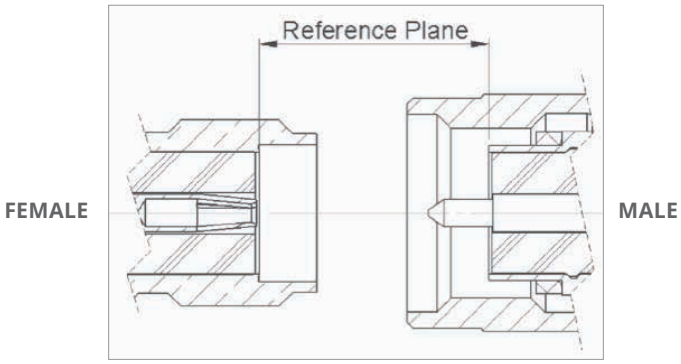

To ensure appropriate torque on the connector, and avoid damage on the contacts it is recommended to use a specific tool with calibrated torque. Apply the recommended torque as shown below:

SMA CONNECTORS	TNC CONNECTORS
From 80 to 120 N.cm	265 N.cm

Connection of semi-rigid cable using the center contact of the cables as pin for connecting the female connector.

If the center contact is not in alignment with the female socket, the switch RF connector could be damaged.

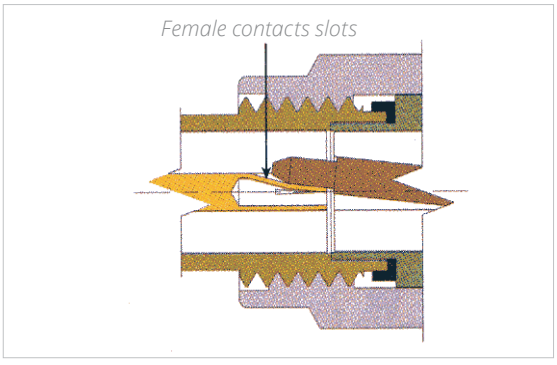


Fig A: Misaligned pin between insulator & female contacts slots

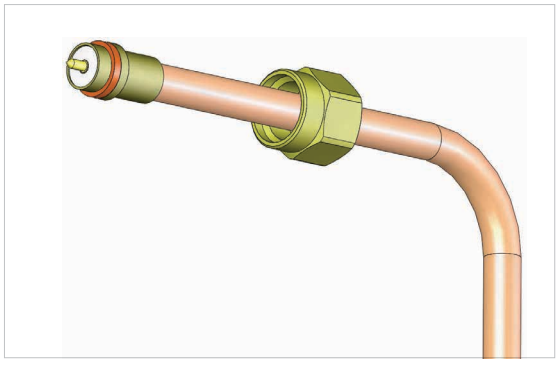


Fig B: Semi-rigid cable with removable nut SMA contact


RF connectors with removable nut allow visual confirmation that the center contact is correctly positioned.

CABLE	CONNECTOR
0.085	R125 052 500
0.141	R125 055 500

APPLICATIONS

APPLICATIONS	QUARTZ	RAMSES & USB SERIES	TITANIUM	PLATINUM	TVAC PRODUCTS	SPACE COMPONENTS
Instrumentation 	Automated Test					N/A
	Measurement Equipments					
	Monitoring Devices					
	Test Network					
Wireless communication 	Telecommunication				N/A	
	Tower Mount Amplifiers					
	BTS					
	Radio Links					
	ECM Equipments					
	Repeaters					
	Base Stations					
	Point to Point Link					
Military 	Military Radios				N/A	
	Electronic Warfare					
	Radar					
Space 	Pay Load: N/A					Pay Load: Various Satellites Communication Observation
	Ground Segment					
	Test Equipments					
	Earth Stations					


+ 2
+ 1
C
RADIALL®
R570452000
0 - 18 GHz
Un : 12 V
Lot: 0932
OF:8981194
2
C
1



SPDT

Section 2 Table of Contents

QUARTZ SERIES

SMT Power Micro-SPDT with
26.5 GHz capabilities: R516 Series .... 2-2 to 2-8
Applications 2-9

RAMSES SERIES

SPDT up to 67 GHz:
R570 Series (miniature models) .... 2-10 to 2-15
SPDT up to 18 GHz:
R570 Series (N, BNC and TNC models) .... 2-16 to 2-19

ELECTRICAL SCHEMATICS

Coaxial SPDT: R570 Series .... 2-20 to 2-23

PLATINUM SERIES

High Performance SPDT up to 40 GHz:
R595 Series .... 2-24 to 2-29

OPTIONAL FEATURES

Optional Features 2-30

SPDT PART NUMBER SELECTION GUIDE[1]

DIGITAL POSITION	Series	Quartz	RAMSES		PLATINUM
	Configuration	SPDT	SPDT		SPDT
R: 1-3	-	R516	R570	R570	R595
4: RF CONNECTORS	DC - 8 GHz	3	-	-	-
	DC - 18 GHz	4	-	-	-
	DC - 26.5 GHz	7	-	-	-
	SMA 3 GHz	-	-	3	-
	SMA 6 GHz	-	-	-	3
	SMA 18 GHz	-	-	4	-
	SMA 20 GHz	-	-	-	4
	SMA 26.5 GHz	-	-	F	F
	SMA 2.9 40 GHz	-	-	8	8
	2.4mm 50 GHz	-	-	J	-
	1.85 mm 67 GHz	-	-	V	-
	QMA 6 GHz	-	-	E	-
	DIN 1.6/5.6, 2.5 GHz	-	-	9	-
	Pc board mount 3 GHz	-	-	A	-
	N 3 GHz	-	0	-	-
	N 12.4 GHz	-	1	-	-
	BNC 3 GHz	-	2	-	-
	TNC 3 GHz	-	5	-	-
	TNC 12.4 GHz	-	6	-	-
	TNC 18 GHz	-	D	-	-
5: TYPE	Failsafe	1/9	1/2	1/2	-
	Latching	3	3/4/5/6	3/4/5/6	3/4/5/6
6: VOLTAGE	6 V	1	-	-	-
	12 V	2	2	2	-
	15 V	-	-	-	7
	24 V	3	-	-	3
	28 V	-	3	3	-
7: TTL OPT./ MODEL	Without	-	0	0	-
	With	-	1	1	-
	SPDT non-terminated	-	-	-	1
	-	1	-	-	-
8: OPTIONS	Without option	-	0	0	1
	Positive common	-	1	1	1
	Supression diodes	-	3	3	-
	Suppression diodes and positive common	-	4	4	-
	Compatible with TTL driver	-	-	-	2
	-	0	-	-	-
9: TERMINALS	Not soldered	0	-	-	-
	Soldered on a connectorized test fixture	T	-	-	-
	Solder pins	-	0	0	0
	D-Sub connector	-	5	-	5
10: DOCUMENT-ATION	Certificate of conformity	-	-	-	-
	Calibration certificate	-	-	-	C
	Calibration certificate + RF curves	-	-	-	R

Notes

Example of P/N: R570F12010 is a SPDT SMA 26.5 GHz, failsafe, 12 Vdc, without TTL, with positive common, solder pins.
1. For part number creation and available options, see detailed part number selection for each series.

Quartz Series


SMT POWER MICRO SPDT WITH 26.5 GHz CAPABILITIES

SURFACE MOUNT TECHNOLOGY

An innovative and original "micro-mechanical" design of the R516 SMT micro-relay offers excellent RF performance, reliability, and repeatability. The miniature size and low installation cost make these coaxial switches an ideal solution.


Very low return loss and insertion loss allow this relay to be used in power applications, as well as in typical SMT relay applications such as RF attenuators, RF matrices, spectrum analysers, and telecommunications.

Failsafe models are offered in two RF configurations (direct and inverted). The association of these two products on the same PC board enables the product to perform the bypass function. (For bypass mounting, further information is available on page 2-6).

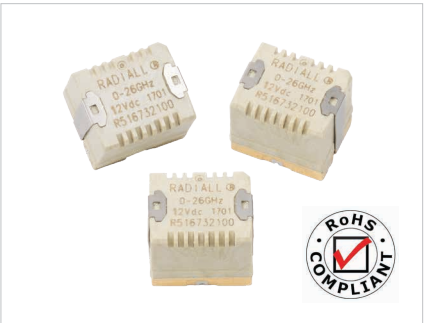


Example of P/N:
R516713100 is a SPDT SMT 26.5 GHz, 24 Vdc, failsafe, not soldered.

ACTUAL SIZE

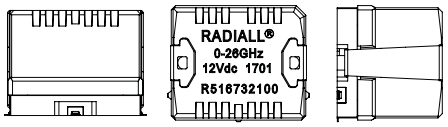

TYPICAL OUTLINE DRAWING

All dimensions are in millimeters [inches].

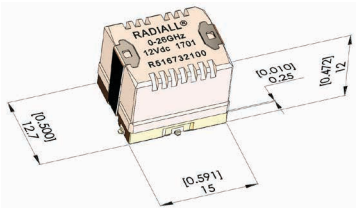

PART NUMBER SELECTION

R516 ___ ___ 10

SERIES PREFIX

FREQUENCY RANGE
3: DC – 8 GHz
4: DC – 18 GHz
7: DC – 26.5 GHz

TYPE
1: Failsafe
3: Latching, 2 coils
9: Failsafe, inverted RF path [1]

ACTUATOR TERMINALS
0: Not soldered
T: Soldered on a connectorized test fixture [2]

ACTUATOR VOLTAGE
1: 6 Vdc
2: 12 Vdc
3: 24 Vdc


Notes:
1. Can be combined with a failsafe model, so as to achieve the "BYPASS" function (see application details on page 2-6).
2. See details about test fixture dimensions on page 2-4.

Quartz Series


QUARTZ GENERAL SPECIFICATIONS

OPERATING MODE		FAILSAFE (TYPES 1 & 9)			LATCHING (TYPE 3)		
Nominal operating voltage (across temperature range)	Vdc	6 (5.3 to 6.6)	12 (10.5 to 13)	24 (21.5 to 30)	6 (5.1 to 6.6)	12 (10.2 to 13)	24 (20.5 to 30)
Coil resistance at 23 °C (+/- 10%)	Ω	49	195	710	55	205	865
Operating current at 23 °C	mA	123	61	32	108	58	34
RF and command ports		Gold-plated access, infrared reflow, forced air oven or hand soldering (Compatible with "lead free" soldering processes)					
Switching time at nominal voltage - Making contacts - Breaking contacts		Max 5 ms (typical 2 ms), including contact bounce time 3 ms					
Life - Cold switching (max 120 cycles/min) - Hot switching (max 20 cycles/min)		1 million cycles			3 million cycles (5 million cycles typical at low level)		
		500000 cycles					
Insulation		Dielectric test voltage			300 Vrms		
		Insulation resistance at 500 Vdc			> 100 MOhms		
Environmental protection		Lead free construction - Waterproof (acc. To IEC 60529 / IP64) [2]					
Mass		8 g					
Operating temperature range (with no icing nor condensation)	°C	-25 to +70 [1]			-40 to +85		
Storage temperature range	°C	-55 to +85					
Sine vibration (MIL STD 202, Method 204D)		Condition D: 10 - 2000 Hz, 20 g			Operating		
		Condition G: 10 - 2000 Hz, 30 g			Non-operating		
Shocks (According to MIL STD 202, Method 213B, Cond. C)		100 g / 6 ms, 1/2 sine			Operating		


PIN IDENTIFICATION (TOP VIEW)




Failsafe Model (Type 1, 6V)




Inverted Failsafe Model For Bypass Application (Type 9, 6V)



Failsafe Model (Type 1, 12V, 24V)



Inverted Failsafe Model For Bypass Application (Type 9, 12V, 24V)



Latching Model (Type 3)

VOLTAGE	RF CONTINUITY
De-energized	C <--> 1(NC)
Energized	C <--> 2(NO)

VOLTAGE	RF CONTINUITY
De-energized	C <--> 1(NC)
Energized	C <--> 2(NO)

VOLTAGE	RF CONTINUITY
-1 +1	C <--> 1
-2 +2	C <--> 2

Notes

1. Failsafe models may be used down to –40 °C, for this application please follow requirements of AN-R516-51.

2. RoHS Compliance: The European Union Restriction of Hazardous Substances certification. For details, please consult our website. Contact Radiall for a copy of this application note.


Quartz Series

QUARTZ PERFORMANCE (S PARAMETERS AVAILABLE ON REQUEST)


FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	THIRD ORDER INTER MODULATION	IMPEDANCE Ω
				SWITCH ALONE		
DC – 8 DC – 18 DC – 26.5	DC – 3	1.20	0.20	50	-110 dBc typical at 1730 MHz (2 carriers 20 W)	50
	3 – 6	1.35	0.40	40		
	6 – 8	1.40	0.50	40		
	8 – 12.4	1.50	0.60	40		
	12.4 – 18	1.70	1.00	40		
	18 – 26.5	2.00	1.60	40		

MEASUREMENT METHOD

RELAY SOLDERED ON TEST FIXTURE [1]

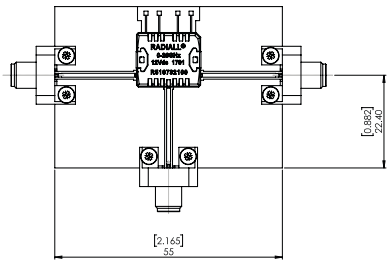


CALIBRATION BOARD [2]




Inputs/Outputs of the calibration board and test fixture are equipped with coaxial type receptacle connectors. The length of the RF tracks is the same on the calibration board and the test fixture circuits. The insertion loss of the relay itself is calculated by subtracting the insertion loss of the "calibration board" to the insertion loss of the "relay soldered on the test fixture."

TYPICAL RF PERFORMANCE

INSERTION LOSS & ISOLATION

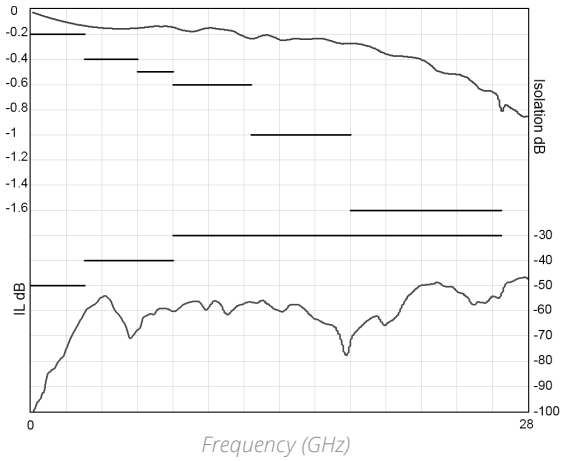

V.S.W.R

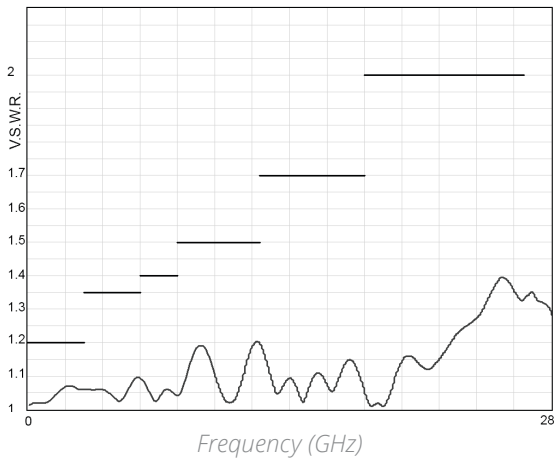

Notes

1. Relay soldered on Test Fixture is available. To order, please use the suffix "T" (part number R516 - - - - - T), as explained in page 2-2. All dimensions are in millimeters [inches].


2. Available upon request

RF POWER RATING FOR COLD SWITCHING USE

(IMPEDANCE 50 OHMS, V.S.W.R. < 1.25)

Power level depends on environmental conditions:

- R516 series have been designed to be used without a cooling fan even for high power applications. However, the power capability may be still improved by using the appropriate cooling fan.
- For failsafe models used with coil permanently supplied (N/O position), the same power level as latching models may be applied.

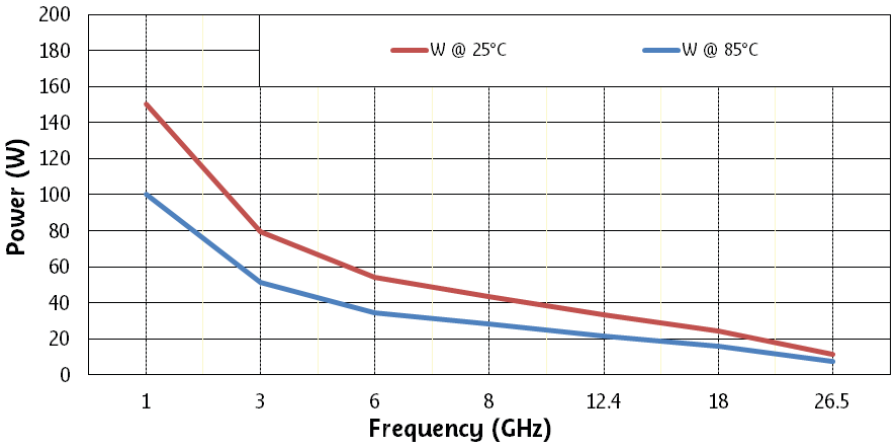



RELAY PACKAGING

ACCORDING TO IEC 286-3 STANDARD


Materials:

- Reel: polyester
- Carrier tape: PVC
- Cover tape: polyester

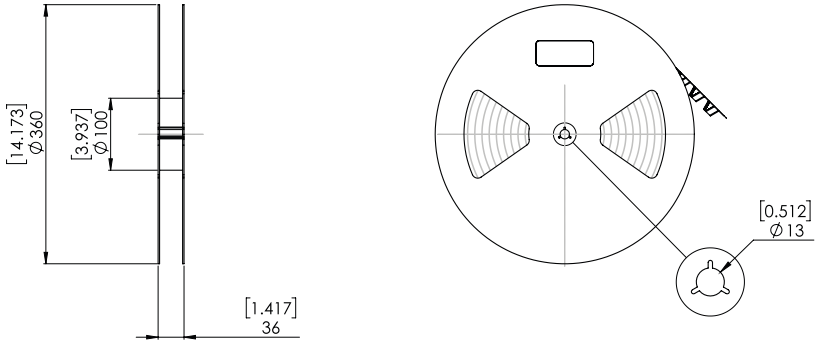


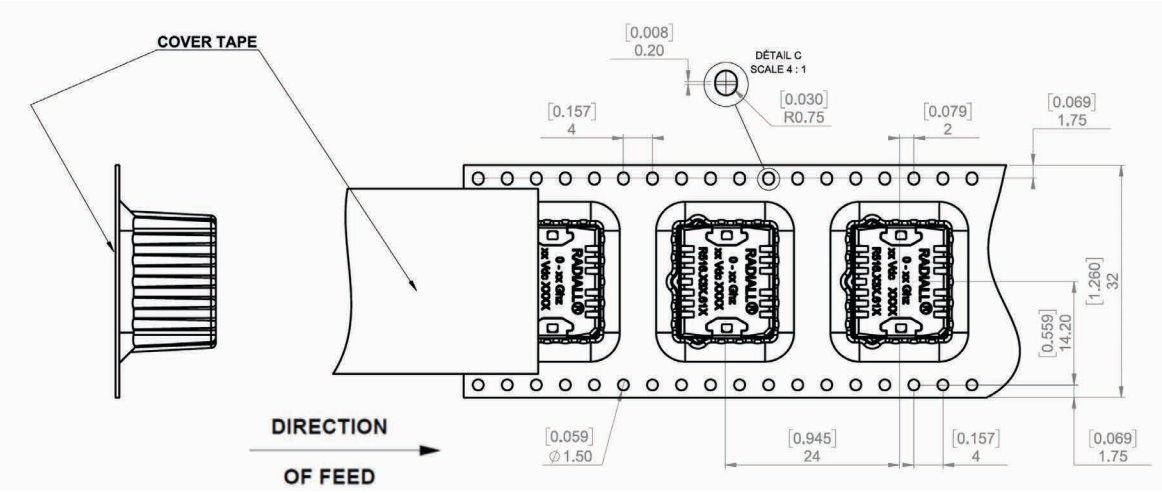

VIDEO SHADOW OF THE RELAY

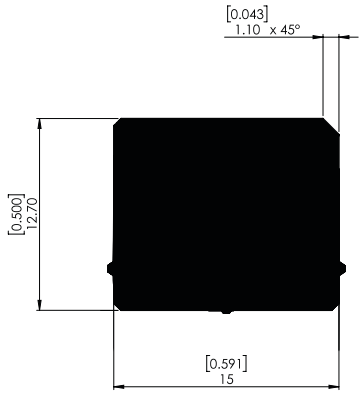


ASPIRATION AREA



BYPASS APPLICATION

FAILSAFE MICRO-RELAY TYPICAL IMPLANTATION

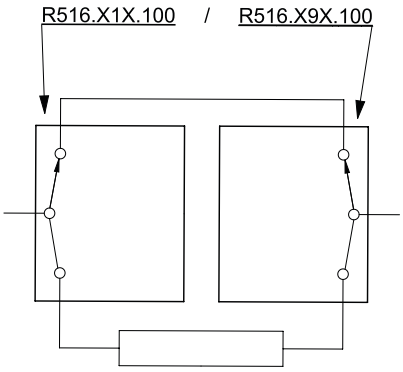

SPDT relays (Single Pole Double Throw) can be used to achieve a bypass switch function. For SMT applications, R516 series, relays are available in two failsafe versions, standard and inverted, to provide symmetric RF ports implantation possibility. The “side by side” implementation of these two versions on a PCB effectively produces the bypass function. The package size is reduced and interconnecting tracks are shortened. Required in order to protect the receiver for transmit/receive applications. RF performance of bypass switch assemblies depend on the distance between the two RF SMT relays.

Notes


All dimensions are in millimeters [inches].

Quartz Series

PC BOARD MOUNTING

Board layout

DXF or Gerber format file available upon request.

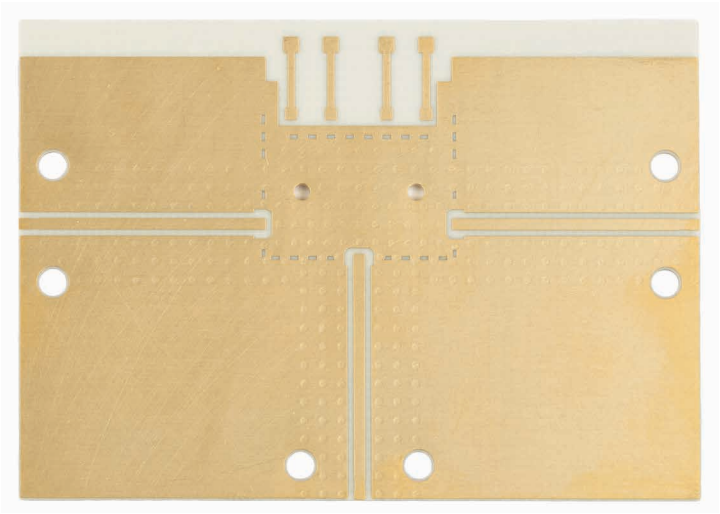

SUBSTRATE TYPES

Recommended substrates are ROGERS RO4003.
Thickness 0.508 mm Cu double side 17.5 µm.

Recommended total thickness of RF tracks (copper over thickness + plating): 40 µm.
Other substrates may be used.

Notes
Please contact your local sales representative for additional information.

RECOMMENDED SOLDERING PROCEDURE

A - Soldering procedure using automatic pick and place equipment


1 - Solder paste: R516 series are “Lead Free”, and Lead Free Sn-Ag3.5-Cu0.7 solder cream may be used as well as standard Sn63–Pb35–Ag2. Radiall recommends using a "no clean - low residue" solder cream (5% solid residue of flux quantity) that will permit the elimination of the cleaning operation step after soldering.

Note: Due to the gold plating of the switch PCB interface, it is important to use a paste made with silver. This will help in avoiding formation of intermetallics as part of the solder joint.

2 - Solder paste deposition: Solder cream may be applied on the board with screen printing or dispenser technologies. For either method, the solder paste must be coated to appropriate thickness and shapes to achieve good solder wetting. Please optically verify that the edges of the zone are clean and without contaminates, and that the PCB zoned areas have not oxydated. The design of the mounting pads and the stenciling area are available upon request, for a thickness of the silk-screen printing of 0.15 mm (0.006 ‘’.)

3 - Placement of the component: For small lightweight components such as chip components, a self-alignment effect can be expected if small placement errors exist. However, this effect is not as expected for relays components and they require a accurate positioning on their soldering pads, typically +/- 0.1 mm (+/-0.004’’.) Place the relay onto the PCB with automatic pick and place equipment. Various types of suction can be used. Radiall does not recommend using adhesive agents on the component or on the PCB.

4 - Soldering: infrared process: Please follow the Radiall recommended max temperature profile for infrared reflow or forced air convection:

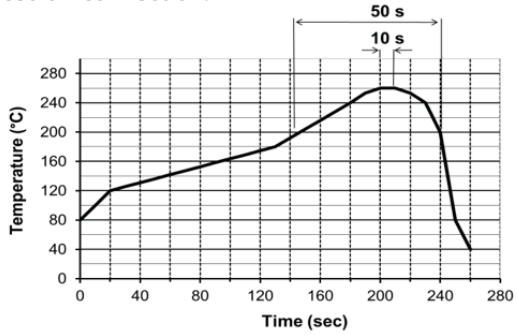

Higher temperature (>260 °C) and longer process duration would permanently damage the switches.

5 - Cleaning procedure: On miniature relays, high frequency cleaning may cause the contacts to stick. If cleaning is needed, please avoid ultrasonic cleaning and use alcohol based cleaning solutions.

In-line cleaning process, spraying, immersion, especially under temperature, may cause a risk of degradation of internal contacts. For such cleaning process please contact us.

6 - Quality check: Verify by visual inspection that the component is centered on the mounting pads. Solder joints: verify by visual inspection that the formation of meniscus on the pads are proper.

B – Soldering procedure by manual operation

Manual soldering is not recommended for high frequencies, as it generates resonance and lower RF characteristics due to gaps between PC board and relay grounds.

1 - Solder paste and flux deposition: Refer to procedure A – 1. Deposit a thin layer of flux on solder pad area. Allow the flux to evaporate a few seconds before applying the solder paste, it will prevent dilution of the paste.

2 - Solder paste deposition: Radiall recommends depositing a small amount of solder paste on solder pad area by syringe, according to the manual soldering pattern (available upon request.) Be careful not to apply solder paste outside of the zone area.

3 - Placement of the component: During manipulation, avoid contaminating gold surfaces by contact with fingers. Place the component on the mounting zone by pressing on the top of the relay lid.

4 - Hand soldering: Iron wattage 30 to 60 W. To keep better RF characteristics, apply pressure on the relay lid during all the soldering stage, so as to reduce the air gap between the PC board and the relay. If possible, fix the ground plane of the relay on the board with two M1.2 screws before the soldering stage. On each side of the central RF access, the RF body edge must be soldered to the ground of the PC board. To improve RF characteristics and avoid soldering the RF body to the ground, a conductive gasket may be used (please contact us for detailed application note.)

5 - Cleaning procedure: Refer to procedure A – 5.

6 - Quality check: Verify by visual inspection that component is centered on the mounting pads. Solder joints: verify by visual inspection that there is no solder excess on the RF pads.


APPLICATIONS

PC BOARD MOUNTING

The SMT Series offers a large range of products which can be used in many applications such as:

- Tower mount amplifiers
- Instrumentation
- Military radios
- ECM equipment
- Remote Radio Unit (RRU)
- Radio-Links
- Repeaters

These products offer the same RF Board and soldering process as all RF components but with a reduced weight and size. They are designed to meet all market specifications.

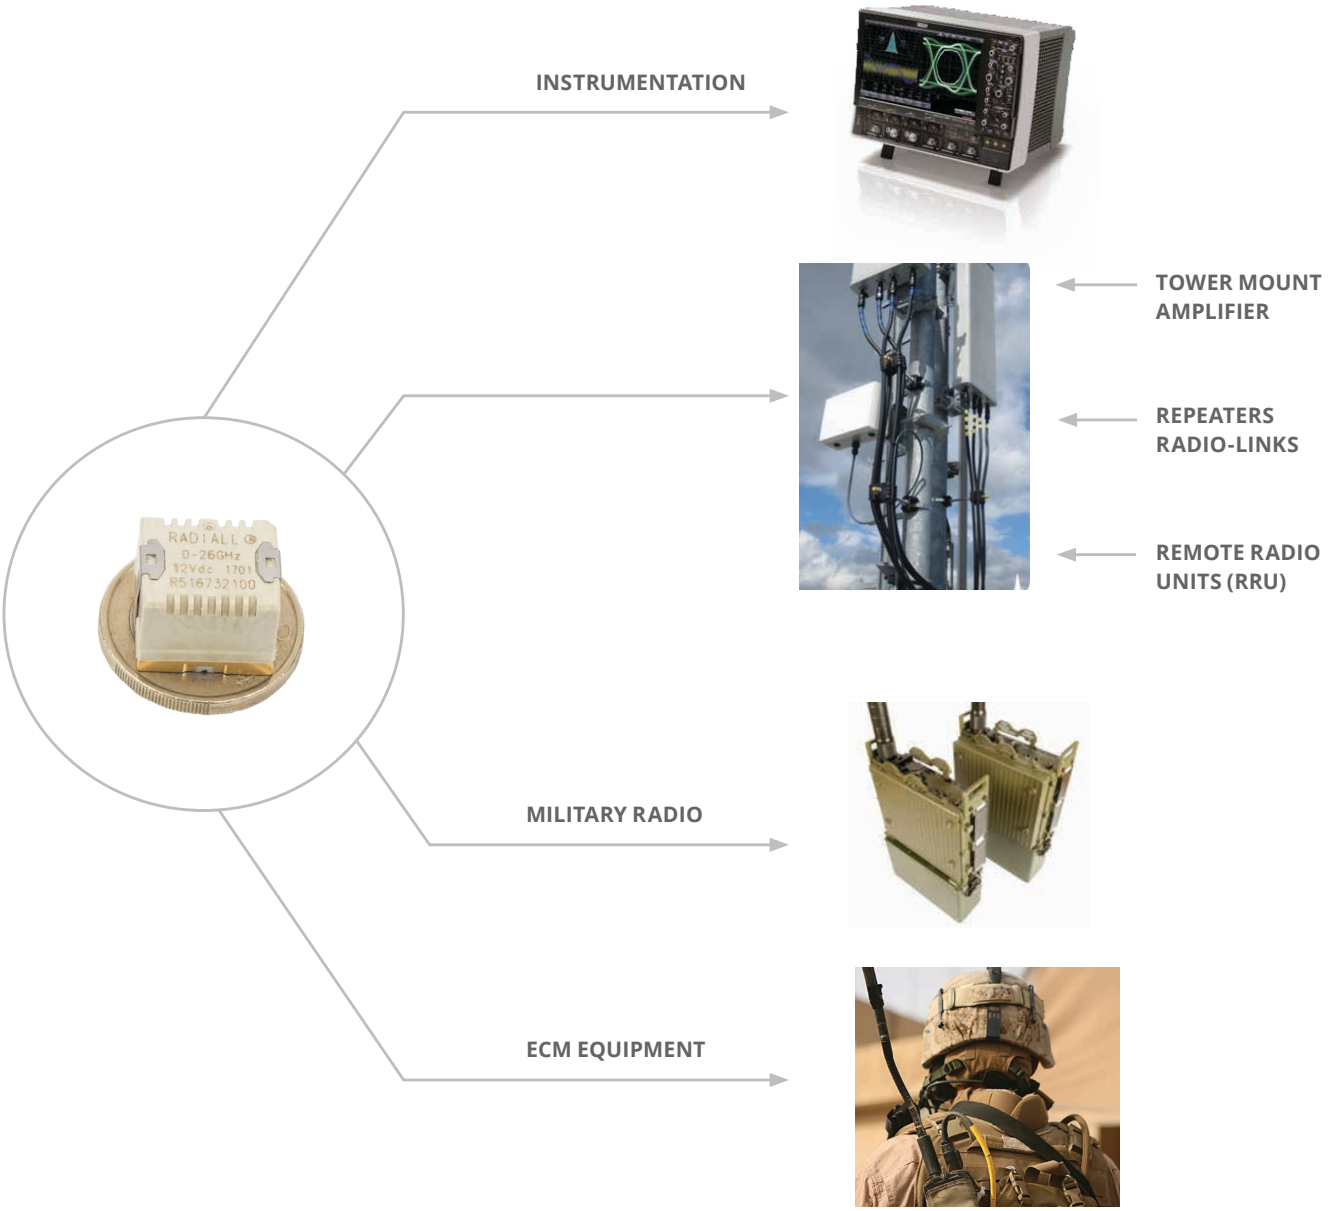

SPDT UP TO 67 GHz

PC BOARD - SMA - SMA 2.9 - 2.4 MM - 1.85 MM - QMA - DIN 1.6/5.6



Radiall's RAMSES SPDT switches offer excellent reliability, high performance and operating frequencies from DC to 67 GHz. Radiall's RAMSES concept (which provides for a life span of 10 million cycles) offers a variety of options to meet customer needs.

These switches are dedicated to all market applications including: military, instrumentation and telecommunications.

Example of P/N: R570413100 is a SPDT SMA 18 GHz, failsafe, 28 Vdc, with TTL driver, without option, solder pins.

PART NUMBER SELECTION

R570 ____ ____ ____ ____ ____

SERIES PREFIX

FREQUENCY RANGE
3: SMA up to 3 GHz
E: QMA up to 6 GHz [5]
4: SMA up to 18 GHz
F: SMA up to 26.5 GHz
8: SMA 2.9 up to 40 GHz [6]
J: 2.4 mm up to 50 GHz
V: 1.85 mm up to 67 GHz
9: DIN 1.6/5.6 up to 2.5 GHz
A: PC board mount up to 3 GHz [4]

TYPE
1: Failsafe
2: Failsafe + I.C.
3: Latching
4: Latching + I.C.
5: Latching + S.C.O. [1]
6: Latching + S.C.O. + I.C. [1]

ACTUATOR VOLTAGE
2: 12 Vdc
3: 28 Vdc

TTL OPTION
0: Without TTL driver
1: With TTL driver [1 & 2]

OPTIONS
0: Without option
1: Positive common [2 & 3]
3: With suppression diodes [1]
4: With suppression diodes and positive common [1, 2 & 3]

ACTUATOR TERMINALS
0: Solder pins

Notes:
I.C.: Indicator contact - S.C.O.: Self Cut-Off.
1. Suppression diodes are already included in Self Cut-Off and TTL option.
2. Polarity is not relevant to application for switches with TTL driver.
3. Positive common shall be specified only with type 3, 4, 5, and 6 because failsafe switches can be used with both polarities.
4. Available only upon request.
5. The QLF tradermark (Quick Lock Formula®) standard applies to QMA and QN series and guaranties the full intermateability between suppliers using this tradermark. Using QLF certified connectors also guarantees the specified level of RF performance.
6. Connector SMA 2.9 is equivalent to "K connector®", registered trademark of Anritsu.

GENERAL SPECIFICATIONS

OPERATING MODE			FAILSAFE		LATCHING	
Nominal operating voltage (across temperature range)		Vdc	12 (10.2 to 13)	28 (24 to 30)	12 (10.2 to 13)	28 (24 to 30)
Coil resistance at 23 °C (+/-10%)		Ω	47.5	275	58	350
Operating current at 23 °C		mA	250	102	210	80
Average power			See Power Rating Chart page 1-13			
TTL Input		High level	2.2 to 5.5 Volts		800 µA max 5.5 Volts	
		Low level	0 to 0.8 Volts		20 µA max 0.8 Volts	
Indicator rating			1 W / 30 V / 100 mA			
Switching time		ms	10			
Life	SMA - SMA 2.9 - QMA		10 million cycles			
	DIN 1.6/5.6 - PC Board		5 million cycles			
	2.4 mm - 1.85 mm		2 million cycles			
Connectors			SMA - SMA 2.9 - 2.4 mm - 1.85 mm - QMA - DIN 1.6/5.6 - PC Board			
Operating temperature range	DIN 1.6/5.6 - 2.4 mm - 1.85 mm		-25 °C to +70 °C			
	SMA - SMA 2.9 - QMA - PC Board		-40 °C to +85 °C			
Storage temperature range	DIN 1.6/5.6 - 2.4 mm - 1.85 mm		-40 °C to +85 °C			
	SMA - SMA 2.9 - QMA - PC Board		-55 °C to +85 °C			
Vibration (MIL STD 202, Method 204D, cond.D)			10-2000 Hz, 20 g		Operating	
Shock (MIL STD 202, Method 213B, cond.C)			100 g / 6 ms, ½ sine		Operating	

RF PERFORMANCE

CONNECTORS	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	IMPEDANCE Ω
DIN 1.6/5.6	DC - 2.5	DC - 1	1.20	0.20	80	75
		1 - 2.5	1.30	0.30	70	
QMA	DC - 6	DC - 3	1.20	0.20	80	50
		3 - 6	1.30	0.30	70	
SMA	DC - 3 DC - 18 DC - 26.5	DC - 3	1.10	0.15	80	
		3 - 8	1.20	0.20	75	
		8 - 12.4	1.20	0.25	65	
		12.4 - 18	1.40	0.35	60	
		18 - 26.5	1.50	0.50	55	
SMA 2.9	DC - 40	DC - 6	1.30	0.30	70	
		6 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.70	0.70	55	
		26.5 - 40	1.90	0.80	50	
PC Board	DC - 3	DC - 3	1.20	0.20	80	
2.4 mm 1.85 mm	DC - 50 DC - 67	DC - 6	1.30	0.30	70	
		6 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.70	0.70	55	
		26.5 - 40	1.90	0.80	50	
		40 - 50	1.90	1.10	50	
		50 - 67	1.90	1.10	50	


Notes

See page 2-12 and 2-13 for typical RF performance.


R570 TYPICAL RF PERFORMANCE

Example: SPDT SMA 2.9 up to 40 GHz

INSERTION LOSS & ISOLATION

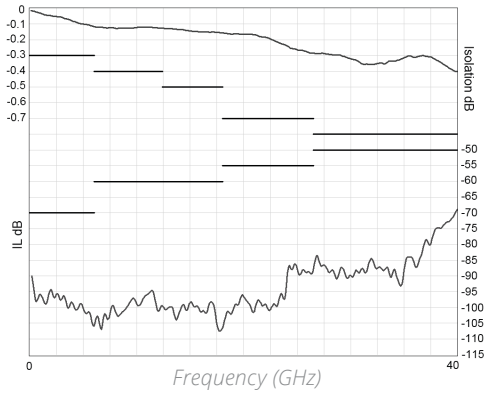


V.S.W.R

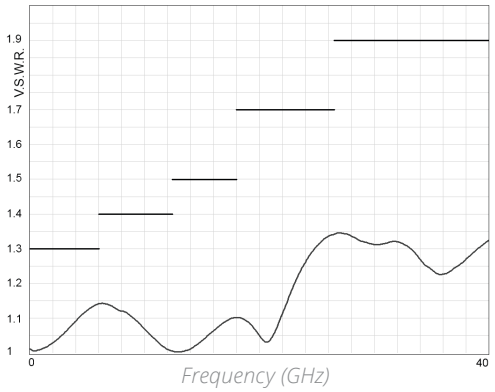


Example: SPDT 2.4 mm up to 50 GHz

INSERTION LOSS & ISOLATION

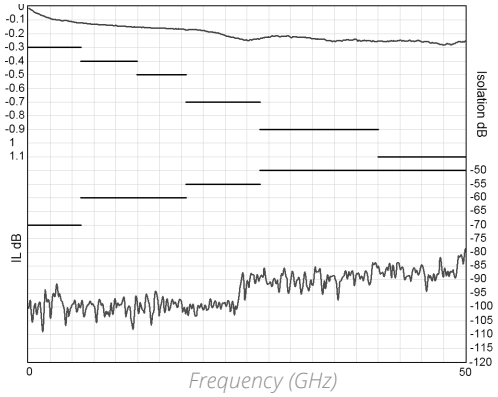


V.S.W.R

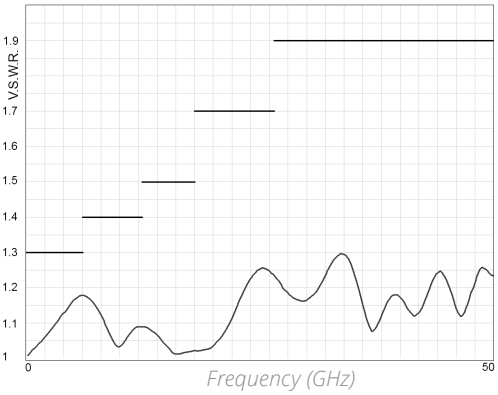


Example: SPDT SMA up to 26.5 GHz

INSERTION LOSS & ISOLATION

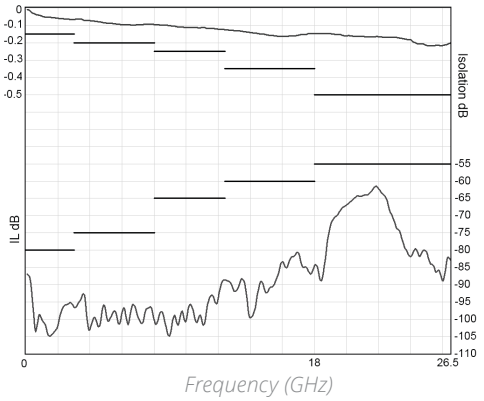


V.S.W.R

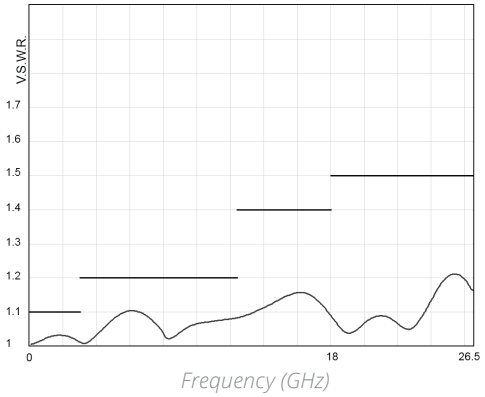


R570 TYPICAL RF PERFORMANCE (CONTINUED)

Example: SPDT QMA up to 6 GHz

INSERTION LOSS & ISOLATION

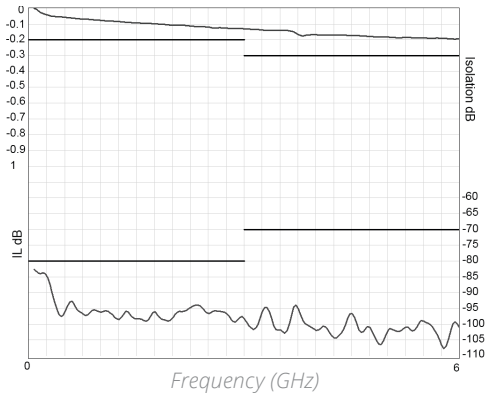


V.S.W.R

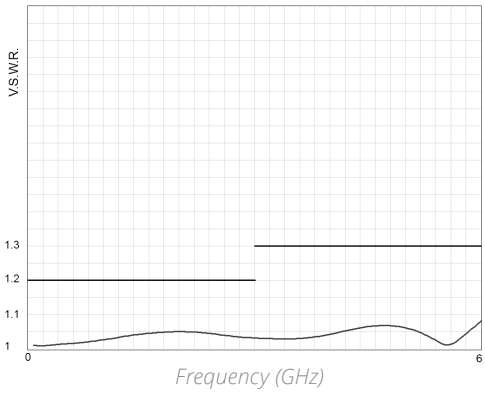


Example: SPDT DIN 1.6/5.6 up to 2.5 GHz

INSERTION LOSS & ISOLATION

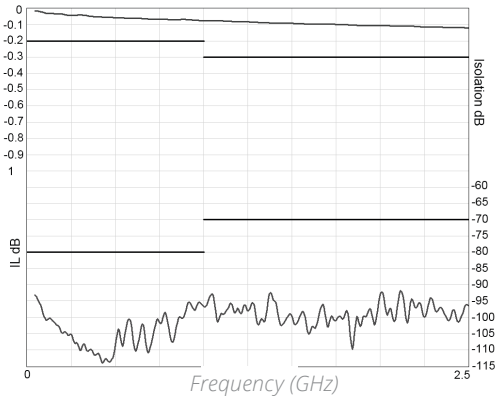


V.S.W.R

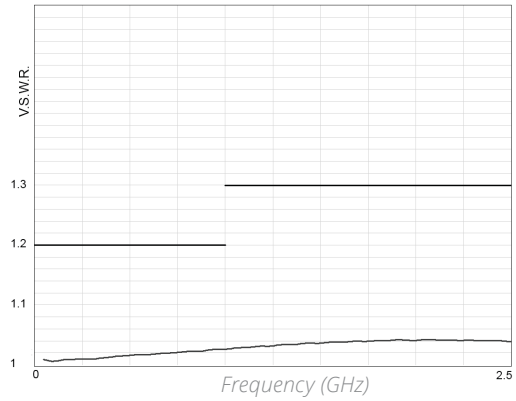


Example: SPDT 1.85 mm up to 67 GHz

INSERTION LOSS & ISOLATION

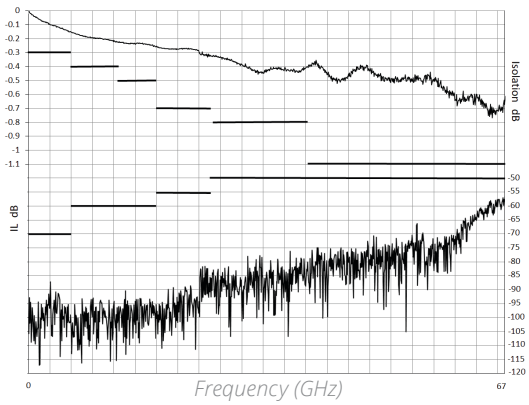



V.S.W.R

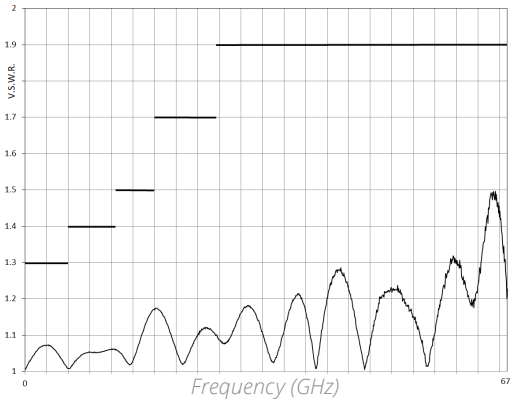

TYPICAL OUTLINE DRAWING

CONNECTORS	A MAX (mm [INCHES])
SMA	7.7 [0.303]
SMA 2.9 and 2.4 mm and 1.85 mm	6.7 [0.264]
QMA	10.8 [0.394]
DIN 1.6/5.6	11.5 [0.433]
PC Board	4.5 [0.157]

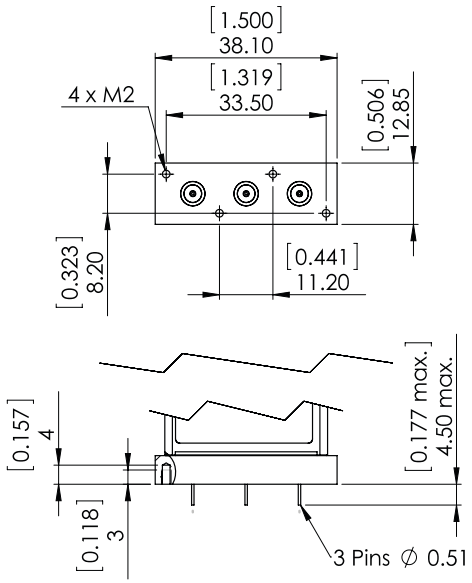

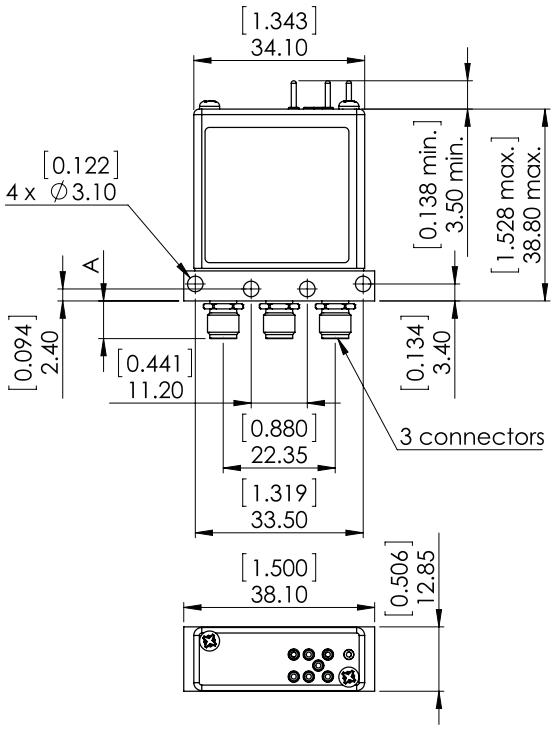


Notes

See page 2-23 for pin identification.

All dimensions are in millimeters [inches].

ACCESSORIES

A printed circuit board interface connector (ordered separately) has been designed for easy mounting on terminals.
For SPDT model R570 series = Radiall part number: R599 910 000.

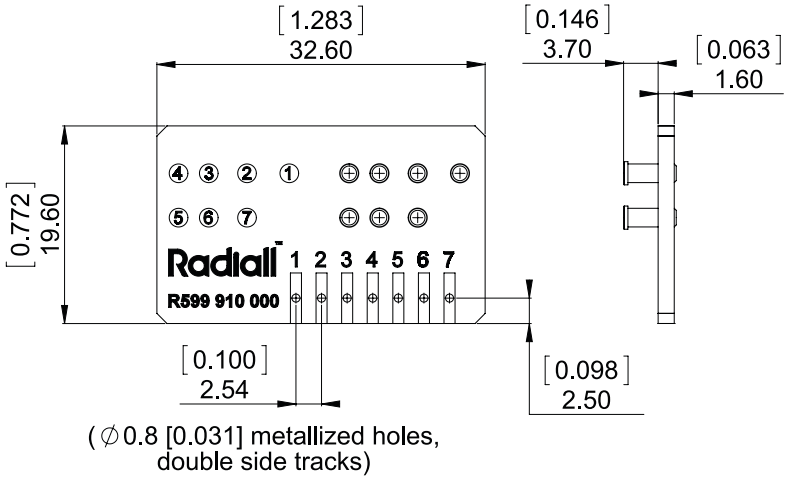



Notes

All dimensions are in millimeters [inches].
The PCB accessory pin number assignment is independant from the pin identification table of the switch.

RAMSES Series

SPDT UP TO 18 GHz

N - TNC - BNC



Radiall's RAMSES SPDT N, BNC and TNC switches are designed for high performance in RF & Microwave systems up to 18 GHz.

Radiall's RAMSES concept (modular concept) offers a full range of configurations. They are commonly used for applications where high power handling capability is required.

These switches are dedicated to all market applications including: defense, instrumentation and telecommunications.

Example of P/N: R570113035 is a SPDT N 12.4 GHz, failsafe, 28 Vdc, with supression diodes, without option, D-Sub connector.

PART NUMBER SELECTION

R570

SERIES PREFIX

FREQUENCY RANGE
0: N up to 3 GHz
1: N up to 12.4 GHz
2: BNC up to 3 GHz
5: TNC up to 3 GHz
6: TNC up to 12.4 GHz
D: TNC up to 18 GHz

TYPE
1: Failsafe
2: Failsafe + I.C.
3: Latching
4: Latching + I.C.
5: Latching + S.C.O. [1]
6: Latching + S.C.O. + I.C. [1]

ACTUATOR VOLTAGE
2: 12 Vdc
3: 28 Vdc

ACTUATOR TERMINALS
0: Solder pins
5: D-Sub connector

OPTIONS
0: Without option
1: Positive common [2 & 3]
3: With suppression diodes [1]
4: With suppression diodes and positive common [1, 2 & 3]

TTL OPTION
0: Without TTL driver
1: With TTL driver [1 & 2]

Notes
I.C.: Indicator contact - S.C.O.: Self Cut-Off.
1. Suppression diodes are already included in Self Cut-Off and TTL option.
2. Polarity is not relevant to application for switches with TTL driver.
3. Positive common shall be specified only with type 3, 4, 5 and 6 because failsafe switches can be used with both polarities.

GENERAL SPECIFICATION

OPERATING MODE			FAILSAFE		LATCHING	
Nominal operating voltage (across temperature range)		Vdc	12	28	12	28
			(10.2 to 13)	(24 to 30)	(10.2 to 13)	(24 to 30)
Coil resistance at 23 °C (+/-10%)		Ω	38	200	38	225
Operating current at 23 °C		mA	320	140	320	125
Average power			See Power Rating Chart page 1-13			
TTL input	High level		2.2 to 5.5 Volts / 800 µA max 5.5 Volts			
	Low level		0 to 0.8 Volts / 20 µA max 0.8 Volts			
Indicator rating		ms	1 W/30 V/100 mA			
Switching time		ms	15			
Life			2.5 million cycles			
Connectors			N - TNC - BNC			
Actuator terminals			Solders pins or 9 pin D-Sub connector			
Operating temperature range			-40 °C to +85 °C			
Storage temperature range			-55 °C to +85 °C			
Vibration (MIL STD 202, Method 204D, cond.D)			10 - 2000 Hz, 20 g		Operating	
Shock (MIL STD 202, Method 213B, cond.C)			100 g, 6 ms, ½ sine		Non-operating	

RF PERFORMANCE

CONNECTORS	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	IMPEDANCE Ω
N/TNC	DC - 3 DC - 12.4	DC - 1	1.15	0.15	85	50
		1-2	1.20	0.20	80	
		2 - 3	1.25	0.25	75	
		3 - 8	1.35	0.35	70	
		8 - 12.4	1.50	0.50	60	
TNC 18	DC - 18	DC - 6	1.30	0.30	70	
		6 - 12.4	1.50	0.50	60	
		12.4 - 18	1.60	0.70	60	
BNC	DC - 3	DC - 1	1.15	0.15	85	
		1 - 2	1.20	0.20	80	
		2-3	1.25	0.25	75	


Notes

See page 2-18 for typical RF performance.


R570 TYPICAL RF PERFORMANCE

Example: SPDT N and TNC up to 12.4 GHz

INSERTION LOSS & ISOLATION

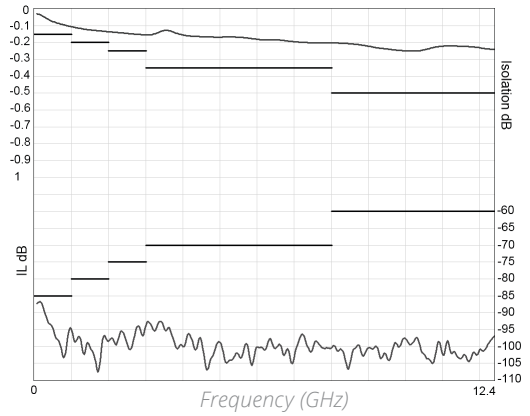


V.S.W.R

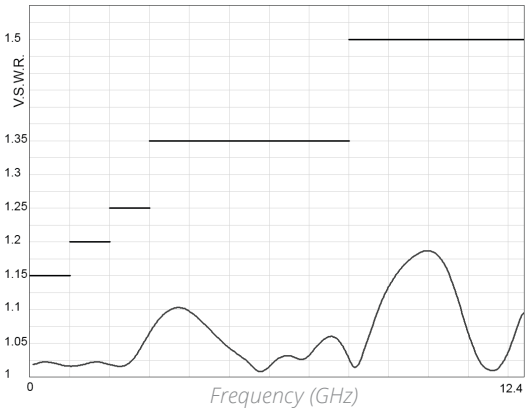


Example: SPDT TNC up to 18 GHz

INSERTION LOSS & ISOLATION

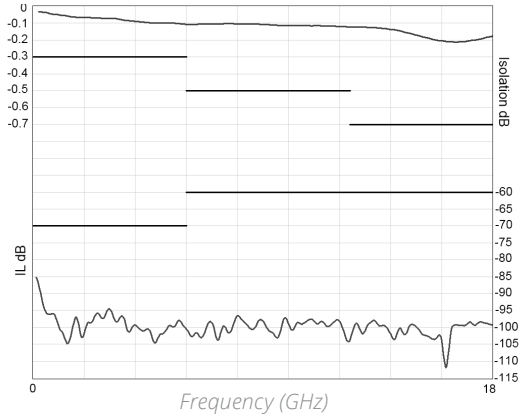


V.S.W.R

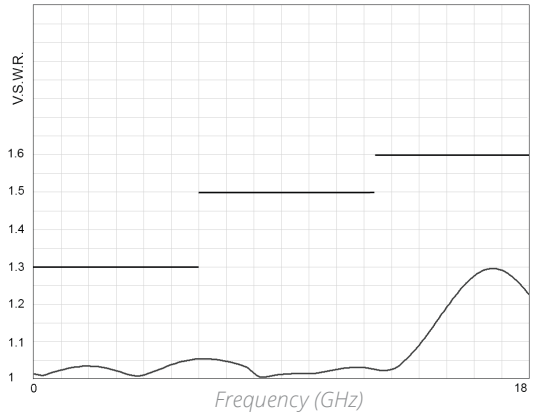


TYPICAL OUTLINE DRAWING

WITH SOLDER PINS

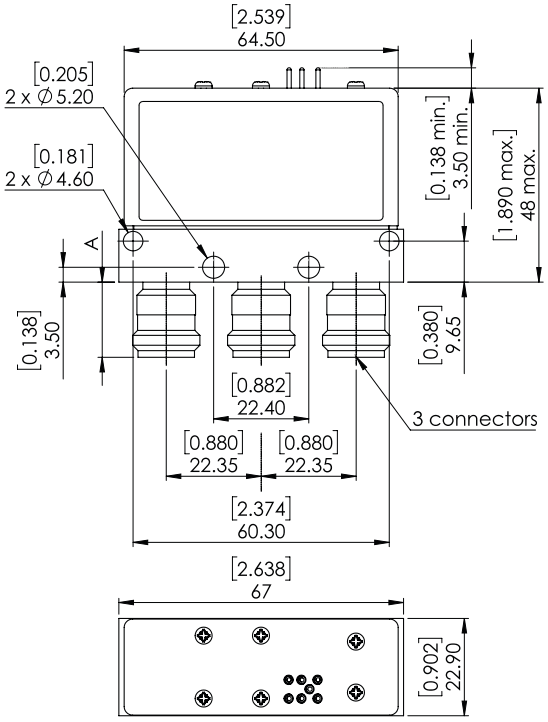


WITH D-SUB CONNECTOR

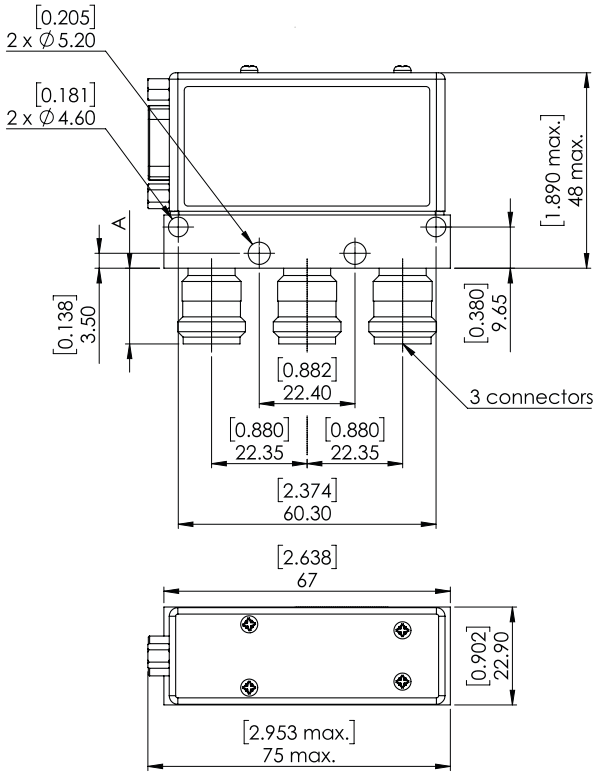

CONNECTORS	N	TNC	BNC
A max (mm [inches])	18.5 [0.709]	11.5 [0.433]	11.5 [0.433]

ACCESSORIES

A printed circuit board interface connector (ordered separately) has been designed for easy mounting on terminals.
For SPDT model R570 series = Radiall part number: R599 910 000

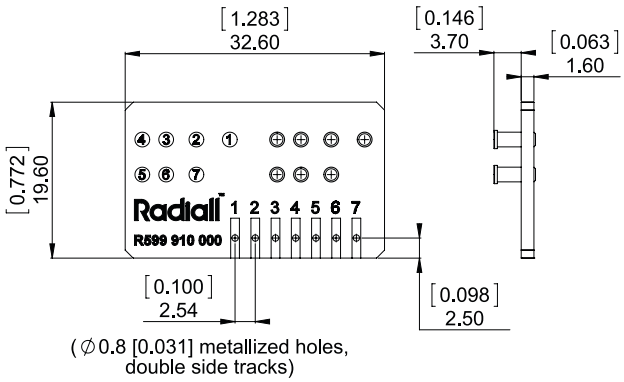



Notes

All dimensions are in millimeters [inches].
The PCB accessory pin number assignment is independant from the pin identification table of the switch.


Electrical Schematics

COAXIAL SPDT


R570 SERIES

FAILSAFE


WITHOUT OPTION
R570-1-000

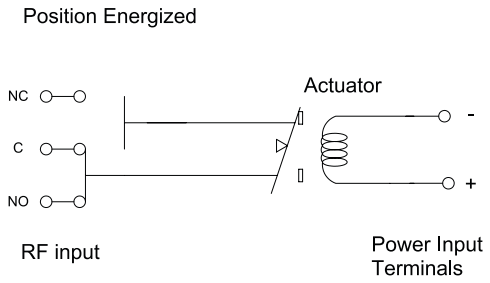


WITH INDICATOR CONTACT
R570-2-000

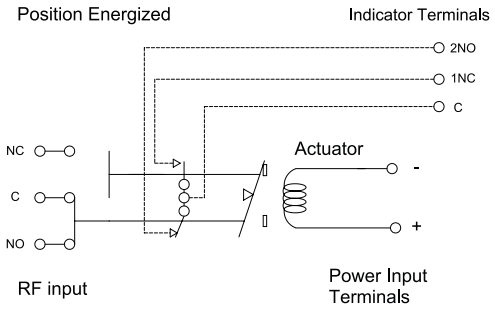


WITH SUPPRESSION DIODES
R570-1-030

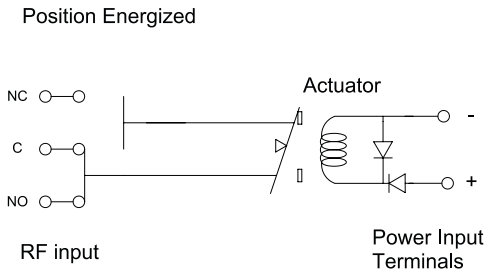


WITH SUPPRESSION DIODES & INDICATOR CONTACT
R570-2-030

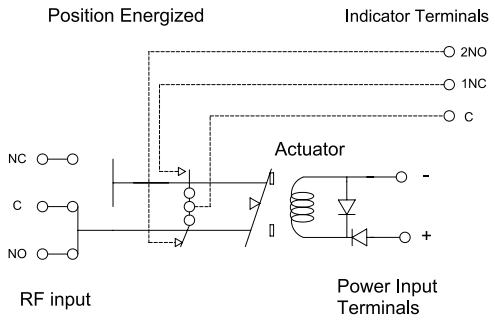

WITH TTL DRIVER (SUPRESSION DIODES ARE INCLUDED)
R570-1-100

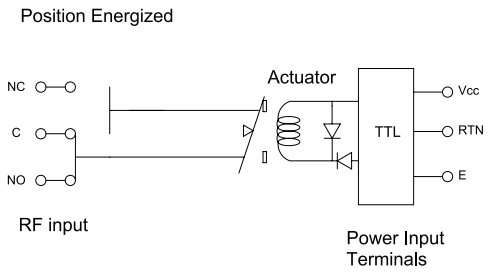

WITH TTL DRIVER & INDICATOR CONTACT (SUPRESSION DIODES ARE INCLUDED)
R570-2-100

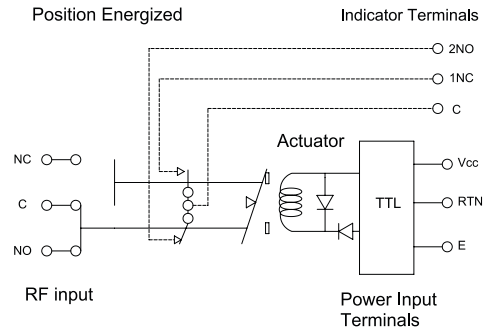


Electrical Schematics

COAXIAL SPDT


R570 SERIES

LATCHING


WITHOUT OPTION
R570-3-000

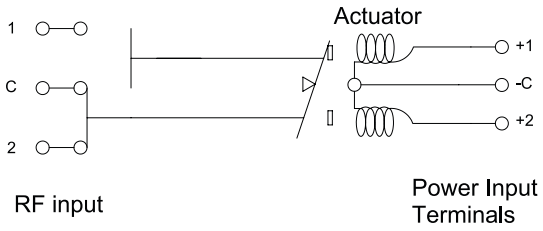


WITH INDICATOR CONTACT
R570-4-000

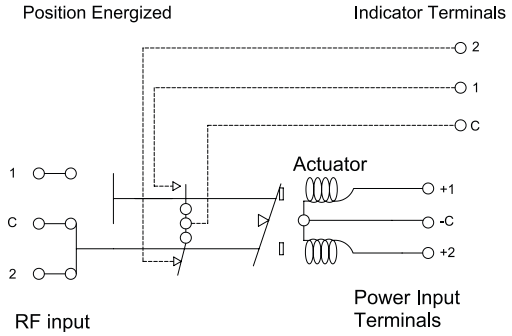


WITH SUPPRESSION DIODES
R570-3-030

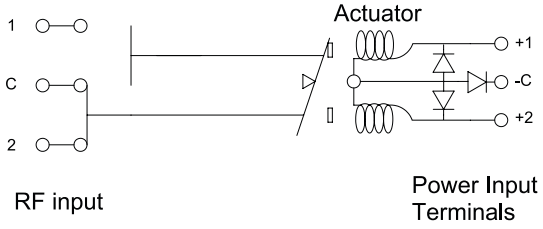


WITH SUPPRESSION DIODES & INDICATOR CONTACT
R570-4-030

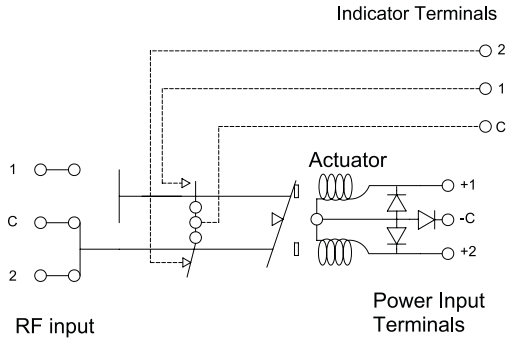

WITH TTL DRIVER (SUPRESSION DIODES ARE INCLUDED)
R570-3-100

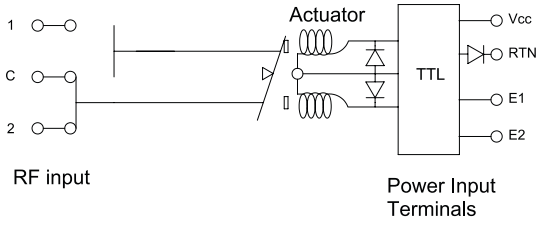

WITH TTL DRIVER & INDICATOR CONTACT (SUPRESSION DIODES ARE INCLUDED)
R570-4-100

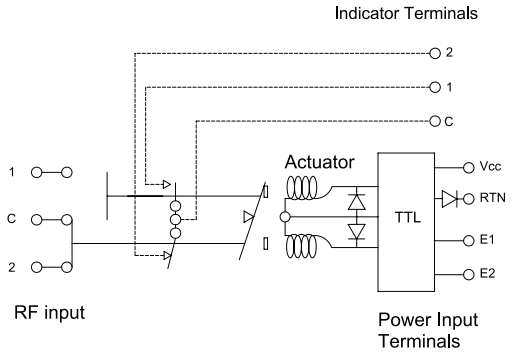


Electrical Schematics

COAXIAL SPDT (CONTINUED)


R570 SERIES

LATCHING


WITH CUT-OFF (SUPRESSION DIODES ARE INCLUDED)
R570-5-100

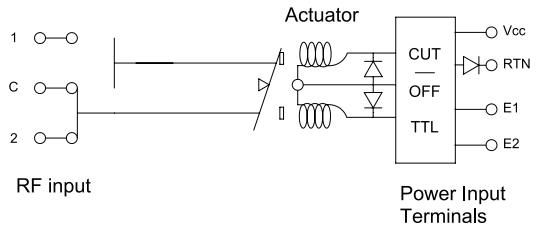


WITH CUT-OFF & INDICATOR CONTACT
(SUPRESSION DIODES ARE INCLUDED)
R570-6-100

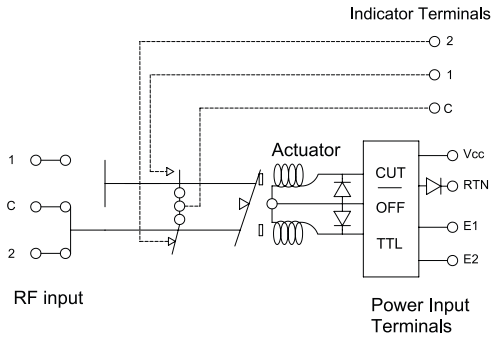


WITH CUT-OFF & TTL DRIVER
(SUPRESSION DIODES ARE INCLUDED)
R570-5-100

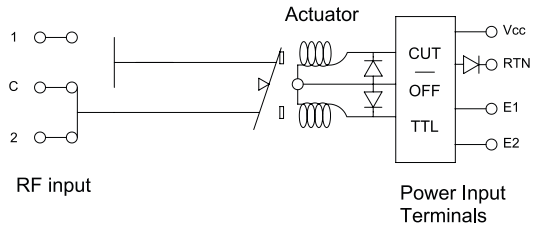


WITH CUT-OFF & INDICATOR CONTACT
(SUPRESSION DIODES ARE INCLUDED)
R570-6-100

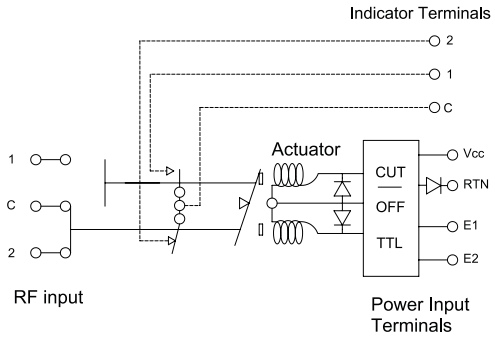

WITH POSITIVE COMMON, NO OPTION
R570-3-010

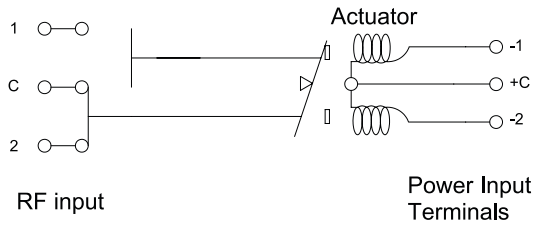

WITH POSITIVE COMMON & INDICATOR CONTACT
R570-5-010

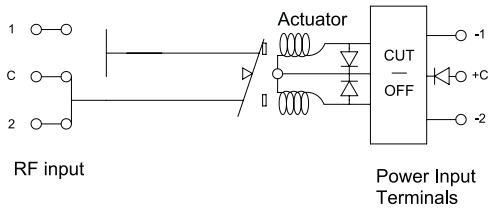


Electrical Schematics

COAXIAL SPDT (CONTINUED)


R570 SERIES

LATCHING


WITH POSITIVE COMMON & SUPPRESSION DIODES
R570-3-040

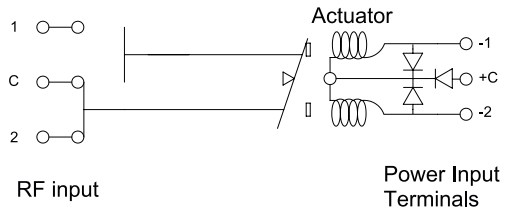


WITH POSITIVE COMMON, SUPPRESSION (DIODES & INDICATOR CONTACT)
R570-4-040

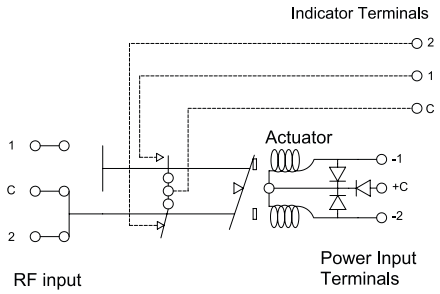

WITH POSITIVE COMMON (SUPRESSION DIODES ARE INCLUDED)
R570-5-010

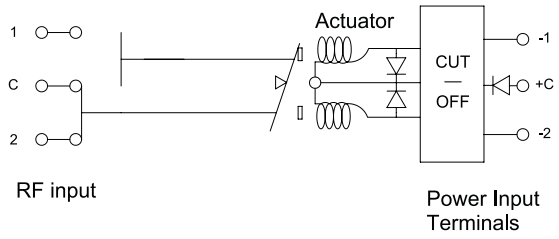


WITH POSITIVE COMMON, CUT-OFF & INDICATOR CONTACT (SUPRESSION DIODES ARE INCLUDED)
R570-6-010

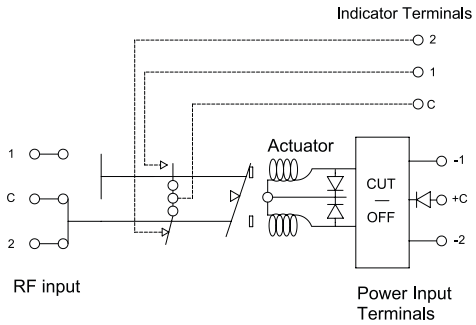

PIN IDENTIFICATION

TYPE	PIN						
	1	2	3	4	6	7	8
Failsafe	+		–				
Failsafe + I.C.	+		–		2NO	1NC	C
Failsafe + TTL	E		RTN	VCC			
Failsafe + I.C. + TTL	E		RTN	VCC	2NO	1NC	C
Latching Latching + Cut-Off	-2 or +2	-1 or +1	+C or -C				
Latching + I.C. Latching + I.C. + Cut-Off	-2 or +2	-1 or +1	+C or -C		2	1	C
Latching + TTL Latching + TTL + Cut-Off	E2	E1	RTN	VCC			
Latching + TTL + I.C. Latching + TTL + I.C.+ Cut-Off	E2	E1	RTN	VCC	2	1	C

Top View

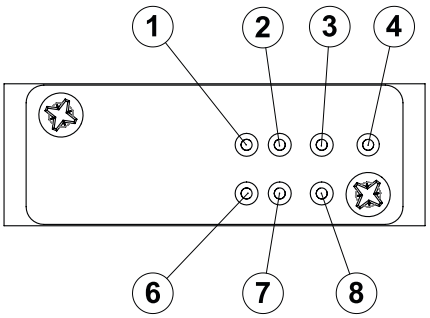

Platinum Series

HIGH PERFORMANCE SPDT UP TO 40 GHz

SMA - SMA 2.9



Radiall's PLATINUM series switches are optimized to perform at a high level over an extended life cycle, with outstanding RF performance, and a guaranteed insertion loss repeatability of 0.03 dB over a life span of 10 million switching cycles. PLATINUM series switches are perfect for automated test and measurement equipment, as well as signal monitoring devices.

Example of P/N: R595443125 is a SPDT SMA 20 GHz, latching, 24 Vdc, with TTL driver, Indicators, D-Sub connector.

PART NUMBER SELECTION

R595

SERIES PREFIX

FREQUENCY RANGE
3: SMA up to 6 GHz
4: SMA up to 20 GHz
F: SMA up to 26.5 GHz
8: SMA 2.9 up to 40 GHz

TYPE
3: Latching [1]
4: Latching + I.C. [1]
5: Latching + S.C.O. [1]
6: Latching + S.C.O. + I.C. [1]

ACTUATOR VOLTAGE
3: 24 Vdc
7: 15 Vdc

SWITCH MODEL
1: Non-terminated SPDT switch

OPTIONS
1: Without option (positive common)
2: Compatible TTL driver

ACTUATOR TERMINALS
0: Solder pins
5: D-Sub connector

DOCUMENTATION
-: Certificate of conformity
C: Calibration certificate
R: Calibration certificate + RF curves

Notes
I.C.: Indicator contact - S.C.O.: Self Cut-Off
1. Suppression diodes are already included

Platinum Series

GENERAL SPECIFICATIONS

OPERATING MODE		LATCHING	
Nominal operating voltage (across temperature range)	Vdc	24 (24 to 32)	15 (12 to 20)
Coil resistance at 23 °C (+/-10%)	Ω	350	120
Operating current at 23 °C	mA	68	125
TTL input	High level	3 to 7 Volts: 800 µA max 7 Volts	
	Low level	0 to 0.8 Volts: 20 µA max 0.8 Volts	
Switching time	ms	15	
Life	SMA - SMA 2.9	10 million cycles	
Actuator terminals		D-Sub 9 pin female Solder pins	
Weight	g	60	

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range	-25 °C to + 75 °C
Storage temperature range	-55 °C to +85 °C
Temperature cycling (MIL STD 202F, Method 107D, Cond.A)	-55 °C to +85 °C (10 cycles)
Sine vibration operating (MIL STD 202, Method 204D, Cond.D)	10 - 2000 Hz, 20 g
Random vibration operating	16.91 g (rms) 50 - 2000 Hz 3 min/axis
Shock operating (MIL STD 202, Method 213B, Cond.G)	50 g / 11 ms, sawtooth
Humidity operating	15 to 95% relative humidity
Humidity storage (MIL STD 202, Method 106E, Cond.E)	65 °C, 95% RH, 10 days
Altitude operating	15000 ft (4.600 meters)
Altitude storage (MIL STD 202, Method 105C, Cond.B)	50000 ft (15.240 meters)


Platinum Series

RF PERFORMANCE

PART NUMBER		R5953--1--	R5954--1--		R595F--1--		R5958--1--	
Frequency range	GHz	DC to 6	DC to 20		DC to 26.5		DC to 40	
Impedance	Ω	50						
Insertion Loss (max)	dB	0.20 + (0.45 / 26.5) × frequency (GHz)						
Isolation (min)	dB	85	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz	85 75 65	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz	85 75 65 60	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz 26.5 to 40 GHz	85 75 65 60 55
V.S.W.R (max)		1.15	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz	1.15 1.25 1.30	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz	1.15 1.25 1.30 1.60	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz 26.5 to 40 GHz	1.15 1.25 1.30 1.60 1.80
Repeatability (up to 10 million cycles at 25 °C)	dB	0.03 dB maximun					0.05 dB maximun	


TYPICAL RF PERFORMANCE

INSERTION LOSS & ISOLATION

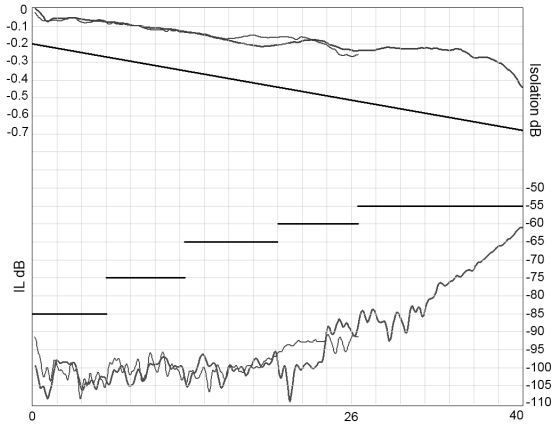

Frequency (GHz)

V.S.W.R

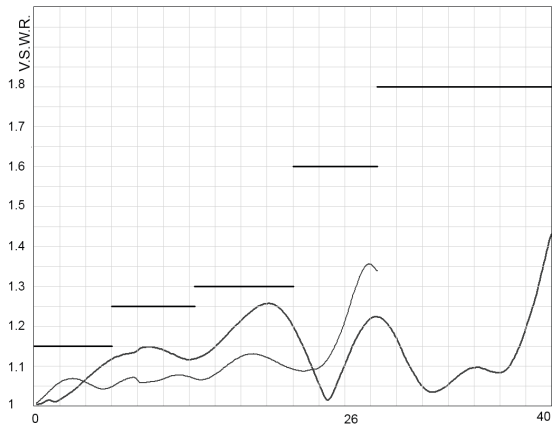

Frequency (GHz)

SMA —— **SMA 2.9** ▬


Platinum Series

SWITCH MODEL: NON-TERMINATED SPDT SWITCH


The non-terminated SPDT switch is a single pole double throw switch. This switch is considered "break-before-make."

RF Schematic Diagram

POSITION E1




POSITION E2




Position Indicator

STATE 11



STATE 22




Standard drive option "1"

(Positive common):


- Connect pin +Vcc to supply (+20 Vdc to +32 Vdc)
- Select desired RF path by applying ground to the corresponding "close" pin (Ex: ground pin E1 to switch to position E1. RF path 1-2 closed and RF path 2-3 open)
- To open desired path and close the new RF path, connect ground to the corresponding "close" pin (Ex: ground pin E2 to open RF path 1-2 and close RF path 2-3)

TTL drive option "2"


- Connect pin GND to ground
- Connect pin +Vcc to supply (+20 Vdc to +32 Vdc)
- Select (close) desired RF path by applying TTL "High" to the corresponding "drive" pin (Ex: apply TTL "High" to pin E1 to switch to position E1. RF path 1-2 closed and RF path 2-3 open)
- To open desired path and close the new RF path, apply TTL "High" to the "drive" pin which corresponds to the desired RF path (Ex: apply TTL "High" to pin E2)




D-Sub connector



Solder pins



D-Sub connector




Solder pins

Platinum Series


SMA - SMA 2.9

TYPICAL OUTLINE DRAWING

WITH D-SUB CONNECTOR

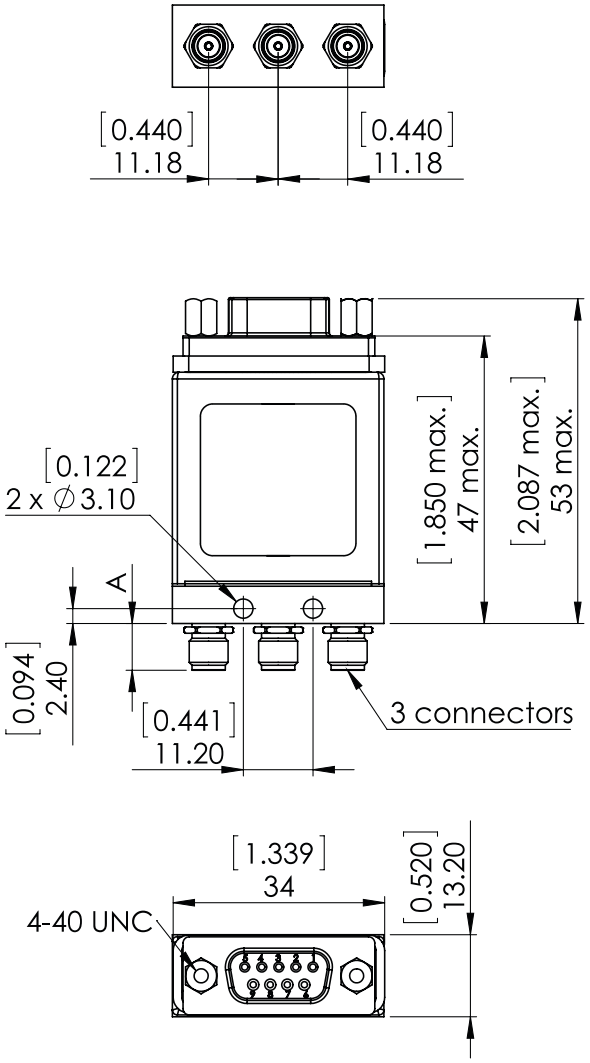

WITH SOLDER PINS

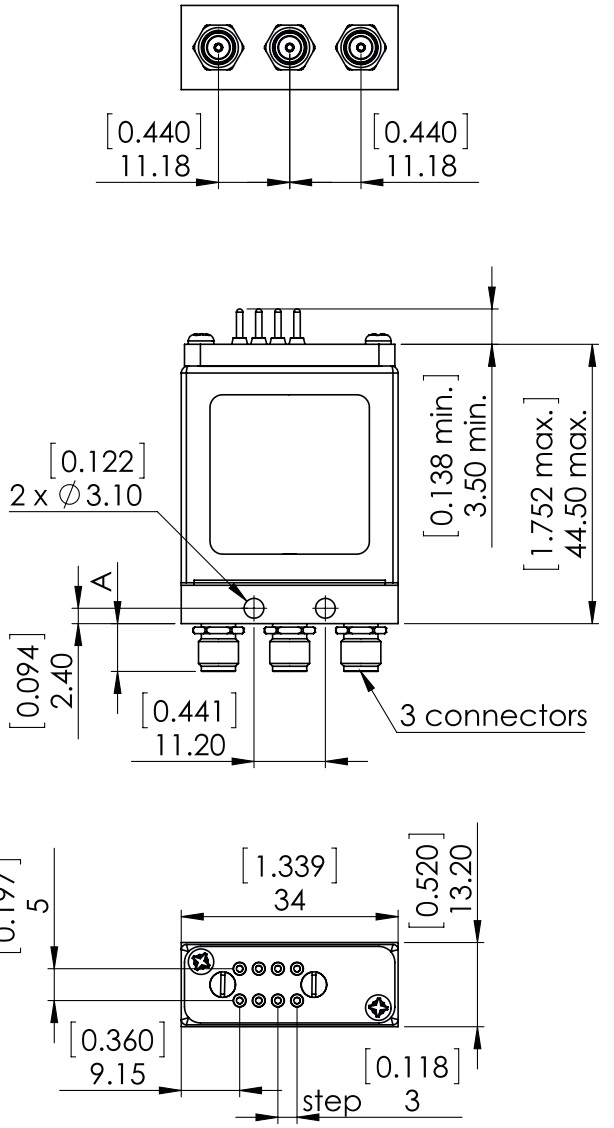

CONNECTORS	A MAX MM [INCHES]
SMA	7.7 [0.303]
SMA 2.9	6.7 [0.264]


Notes

All dimensions are in millimeters [inches].

RF POWER RATING CHART


This graph is based on the following conditions:

- *Ambient temperature: + 25 °C*
- *Sea level*
- *V.S.W.R.: 1 and cold switching*

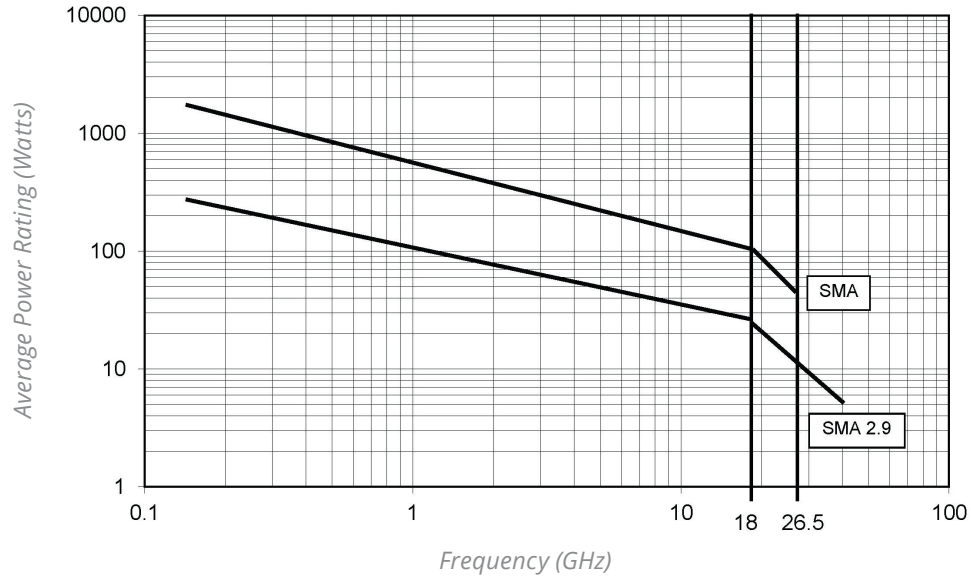

DERATING FACTOR VERSUS VSWR

The average power input must be reduced for load V.S.W.R. above 1:1

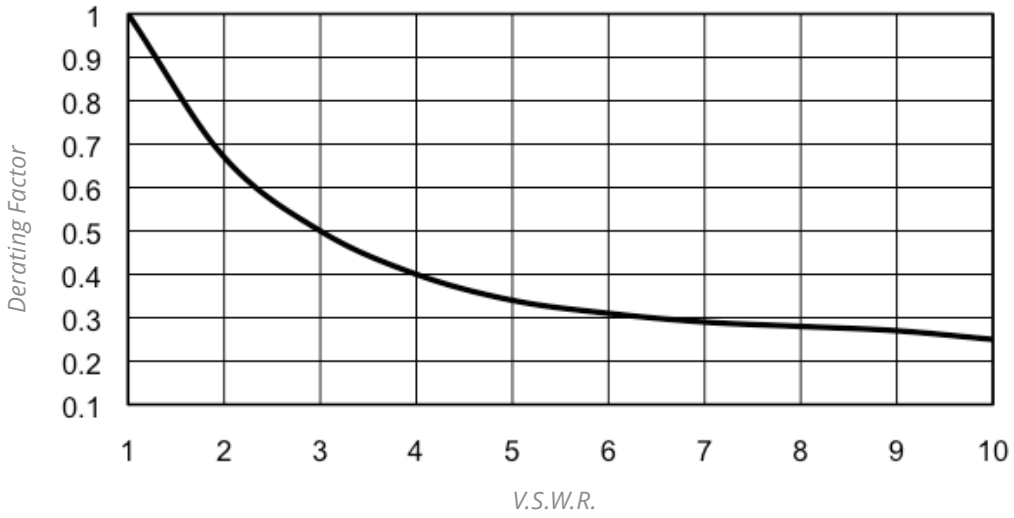

OPTIONAL FEATURES

GENERAL



All miniature SPDT switches fitted with SMA, QMA, 2.4 mm or SMA 2.9 connectors can be delivered with 34 mm narrow width RF body.

Contact Radiall sales directly for availability.

EXAMPLES OF DEDICATED APPLICATION OPTIONS




SMA SPDT with a SINGLE input TTL driver. This option is available in a latching configuration upon special request. Key advantages include less wires and easier connection.



SPDT with MILC38999 circular connector for L band airbone applications.



SPDT models available for high power military applications (up to 100 watts CW from DC to 18 GHz).

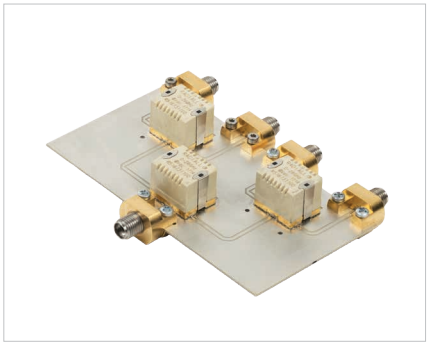

A SP4T design up to 26.5 GHz with SMT relays mounted on a PCB fitted with UMP (Ultra Miniature Pressure) contact. Various switching configurations can be designed according to your specific requests.



SPDT with D-sub connector can be designed.



DP3T & SPDT TERMINATED

Section 3 Table of Contents

RAMSES SERIES
DP3T and Terminated SPDT up to 67 GHz: R585 Series ..... 3-2 to 3-8

ELECTRICAL SCHEMATICS
Coaxial DP3T and Terminated SPDT: R585 Series ..... 3-9 to 3-14

PLATINUM SERIES
High performance DP3T and Terminated SPDT up to 40 GHz: R595 Series ..... 3-15 to 3-24

OPTIONAL FEATURES
Optional Features for DP3T Switches 3-25

DP3T PART NUMBER SELECTION GUIDE[1]

DIGITAL POSITION	Series	RAMSES	PLATINUM
R 1-3:	-	R585	R595
4: RF CONNECTORS	SMA 3 GHz	3	-
	SMA 6 GHz	-	3
	SMA 18 GHz	4	-
	SMA 20 GHz	-	4
	SMA 26.5 GHz	F	F
	SMA 2.9 40 GHz	8	8
	2.4 mm 50 GHz	J	-
5: TYPE	Failsafe	1	-
	Latching	3	3
	Normally open	7	-
6: VOLTAGE	12 V	2	-
	15 V	-	7
	24 V	-	3
	28 V	3	-
7: SWITCH MODEL	DP3T	0/1	5
	SPDT Terminated	2/3/4/5	2
	Terminated 4 ports Bypass	6/7	3
8: OPTIONS	Without option	0	0
	Positive common	1	1
	Supression diodes	3	-
	Positive common and suppression diodes	4	-
9: TERMINALS	Solder pins	0	0
	D-Sub connector	-	5
10: DOCUMENTATION	Certificate of conformity	-	-
	Calibration certificate	-	C
	Calibration certificate + RF curves	-	R

Notes

TTL driver is already included for the 1, 3, 5 and 7 switch models of the RAMSES R585 series.
Example of P/N: R585832000 is a DP3T SMA2.9 40 GHz, latching, 12 Vdc, without option, solder pins.
1. For part number creation and available options, see detailed part number selection for each series.

RAMSES Series

DP3T & TERMINATED SPDT UP TO 67 GHz

SMA - SMA 2.9 - 2.4 MM



Radiall's RAMSES DP3T and Terminated SPDT switches offer excellent reliability, high performance and operating frequencies from DC to 50 GHz. A full range of options are available within the RAMSES range in order to offer customers a complete solution.

These relays are dedicated to market applications including: defense, instrumentation and telecommunication.

Example of P/N: R585423300 is a SPDT terminated SMA 18 GHz, failsafe, 28 Vdc, indicator contacts, internal terminations without TTL drivers and solder pins.

PART NUMBER SELECTION

R585 _ _ _ _ _ _

SERIES PREFIX

RF CONNECTORS
3: SMA up to 3 GHz
4: SMA up to 18 GHz
F: SMA up to 26.5 GHz
8: SMA 2.9 up to 40 GHz [5]
J: 2.4 mm up to 50 GHz [4]
V: 1.85 mm up to 67 GHz [6]

TYPE
1: Failsafe
2: Failsafe + I.C.
3: Latching
4: Latching + I.C.
5: Latching + S.C.O. [1]
6: Latching + S.C.O. + I.C. [1]
7: Normally open
8: Normally open + I.C.

ACTUATOR VOLTAGE
2: 12 Vdc
3: 28 Vdc

SWITCH MODEL
0: Non-terminated 5 port DP3T switch without TTL driver
1: Non-terminated 5 port DP3T switch with TTL driver [1 & 2]
2: Terminated SPDT switch without TTL driver / internal termination
3: Terminated SPDT switch with TTL driver / internal termination [1 & 2]
4: Terminated SPDT switch without TTL driver / external termination
5: Terminated SPDT switch with TTL driver / external termination [1 & 2]
6: Terminated 4 port bypass switch without TTL driver / external termination
7: Terminated 4 port bypass switch with TTL driver / external termination [1 & 2]

OPTIONS
0: Without option
1: Positive common [2 & 3]
3: With suppression diodes [1]
4: With suppression diodes and positive common [1, 2 & 3]

ACTUATOR TERMINALS
0: Solder pins

Notes

I.C.: Indicator contact/S.C.O.: Self Cut-Off
1. Suppression diodes are already included in Self Cut-Off and TTL option
2. Polarity is not relevant to application for switches with TTL driver
3. Positive common shall be specified only with type 3, 4, 5, 6, 7 and 8 because failsafe switches can be used with both polarities
4. Not available with switch model "2" and "3"
5. Connector SMA 2.9 is equivalent to "K connector®", registered trademark of Anritsu.
6. Not available with external terminations and Bypass configuration

RAMSES Series

GENERAL SPECIFICATIONS

OPERATING MODE		FAILSAFE		LATCHING		NORMALLY OPEN	
Nominal operating voltage (across operating temperature)	Vdc	12	28	12	28	12	28
		(10.2 to 13)	(24 to 30)	(10.2 to 13)	(24 to 32)	(10.2 to 13)	(24 to 32)
Coil resistance (+/-10%)	Ω	24	138	29	175	47.5	275
Nominal operating current at 23 °C	mA	500	205	420	160	250	102
Average power		See Power Rating Chart page 1-13					
		Internal terminations: 1 Watt CW into 50 Ohms					
TTL input	High level	2.2 to 5.5 Volts			800 µA max 5.5 Volts		
	Low level	0 to 0.8 Volts			20 µA max 5.5 Volts		
Indicator rating		1 W / 30 V / 100 mA					
Switching time (max)	ms	10					
Life	SMA - SMA 2.9	2 million cycles for Normally open and internal terminated models 10 million cycles for all other products					
	2.4 mm - 1.85 mm	2 million cycles					
Actuator terminals		Solder pins					
Operating temperature range	SMA - SMA 2.9	-40 °C to +85 °C					
	2.4 mm - 1.85 mm	-25 °C to +70 °C					
Storage temperature range	SMA - SMA 2.9	-55 °C to +85 °C					
	2.4 mm - 1.85 mm	-40 °C to +85 °C					
Vibration (MIL STD 202, Method 204D, cond.D)		10-2000 Hz, 20 g			Operating		
Shock (MIL STD 202, Method 213B, cond.C)		100 g / 6 ms, ½ sine			Operating		

RF PERFORMANCE

CONNECTORS	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	IMPEDANCE Ω
SMA	DC - 3 DC - 18 DC - 26.5	DC - 3	1.20	0.20	80	50
		3 - 8	1.30	0.30	70	
		8 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.70	0.70	55	
SMA 2.9	DC - 40	DC - 6	1.30	0.30	70	50
		6 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.70	0.70	55	
		26.5 - 40	1.90	0.80	50	
2.4 mm	DC - 50	DC - 6	1.30	0.30	70	50
		6 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.70	0.70	55	
		26.5 - 40	1.90	0.80	50	
		40 - 50	1.90	1.10	50	
1.85 mm	DC - 67	DC - 6	1.30	0.30	70	50
		6 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.70	0.70	55	
		26.5 - 40	1.90	0.80	50	
		40 - 50	1.90	1.10	50	
		50 - 67	1.90	1.10	50	


Notes

See page 3-4 for typical RF performance.


R585 TYPICAL RF PERFORMANCE

Example: DP3T SMA up to 26.5 GHz

INSERTION LOSS & ISOLATION

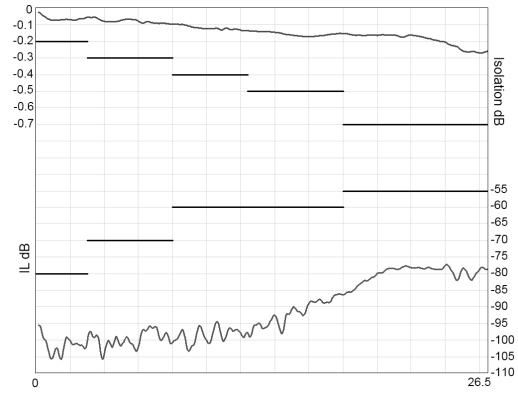


V.S.W.R

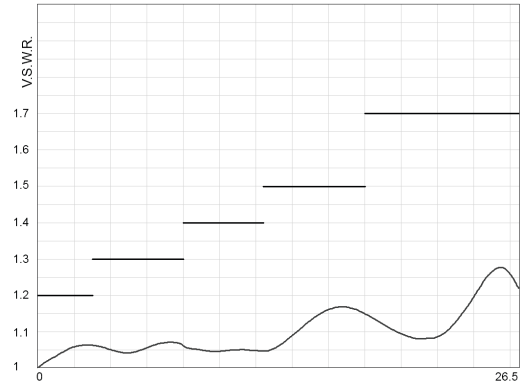


Example: DP3T SMA 2.9 up to 40 GHz

INSERTION LOSS & ISOLATION

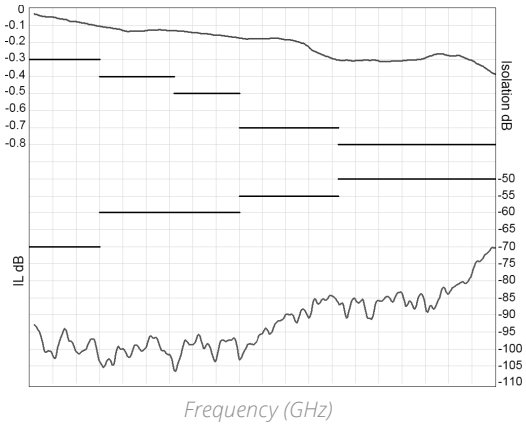


V.S.W.R

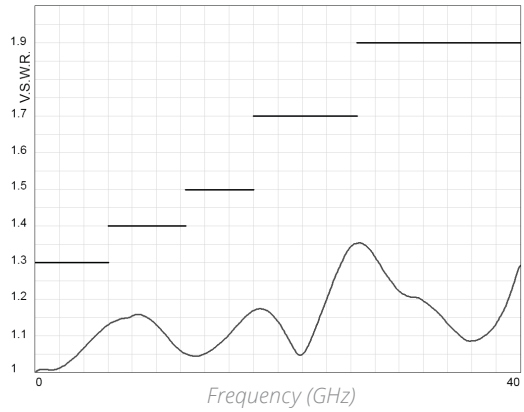


RAMSES Series

Example: DP3T 2.4 mm up to 50 GHz

INSERTION LOSS & ISOLATION

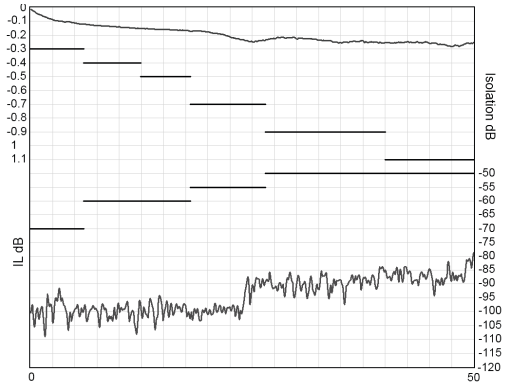


V.S.W.R

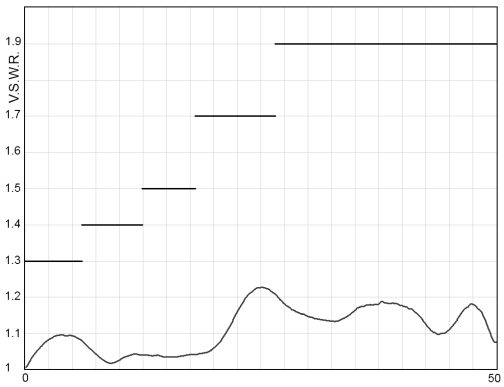


Example: DP3T 1.85 mm up to 67 GHz


INSERTION LOSS & ISOLATION

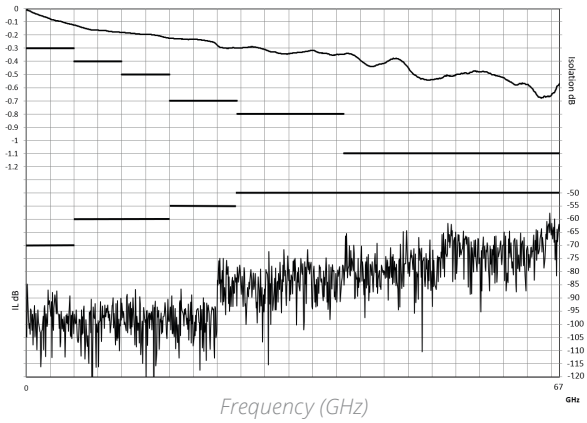


V.S.W.R

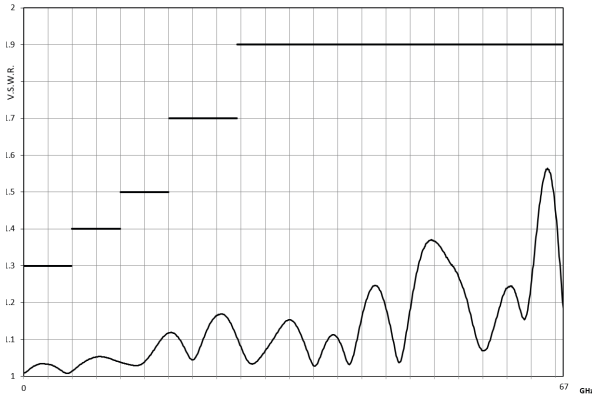

TYPICAL OUTLINE DRAWING

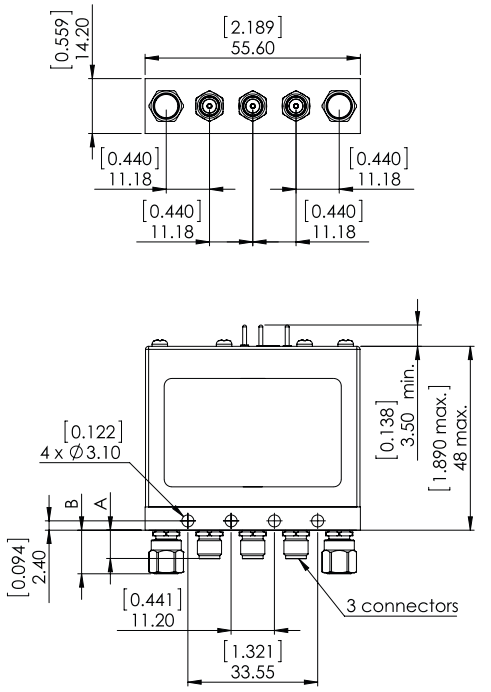

TERMINATED SPDT SWITCH / EXTERNAL TERMINATIONS
R585 --- 4--
R585 --- 5--

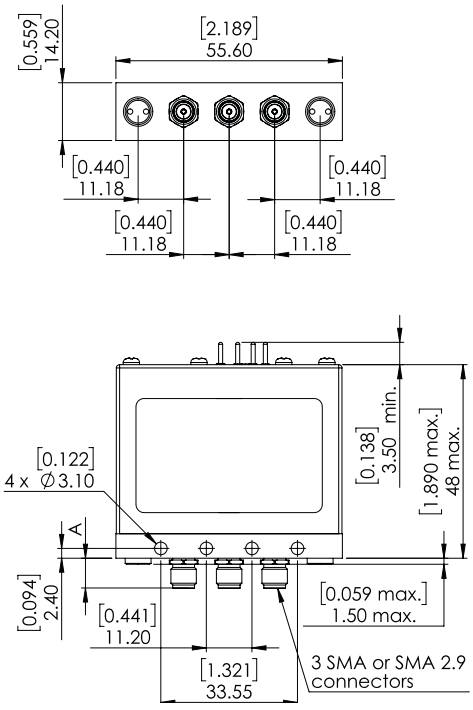


TERMINATED SPDT SWITCH / INTERNAL TERMINATIONS
R585 --- 2--
R585 --- 3--


CONNECTORS	A MAX (MM [INCHES])	B MAX (MM [INCHES]) IF APPLICABLE
SMA up to 18 GHz	7.7 [0.303]	13.5 [0.118]
SMA up to 26.5 GHz	7.7 [0.303]	13.5 [0.118]
SMA 2.9 up to 40 GHz	6.7 [0.264]	21 [0.827]
2.4 mm up to 50 GHz	6.7 [0.264]	21 [0.827]
1.85 mm up to 67 GHz	6.7 [0.264]	-

Notes
All dimensions are in millimeters [inches].
See page 3-14 for pin indentification.

RAMSES Series

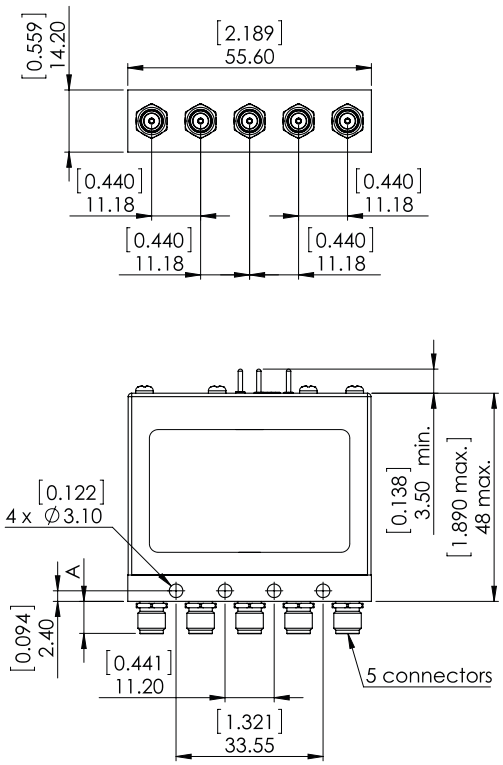

NON-TERMINATED 5 PORT DP3T SWITCH
R585 --- 0--
R585 --- 1--

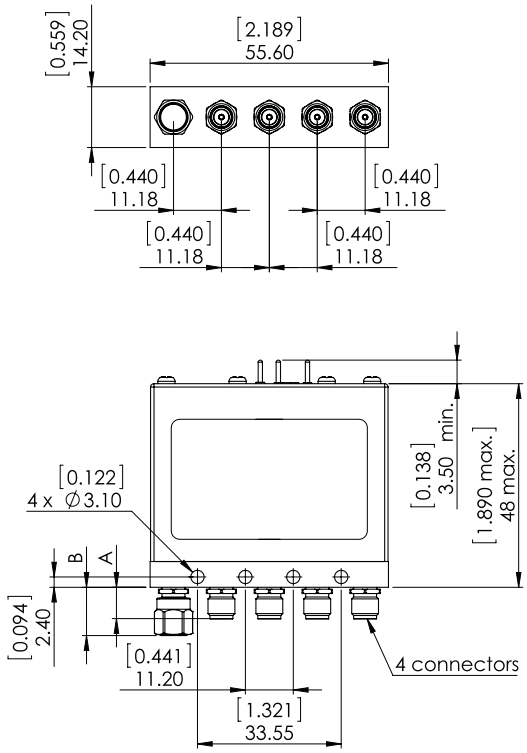

TERMINATED 4 PORT BYPASS SWITCH/EXTERNAL TERMINATION
R585 --- 6--
R585 --- 7--

CONNECTORS	A MAX (MM [INCHES])	B MAX (MM [INCHES]) IF APPLICABLE
SMA up to 18 GHz	7.7 [0.303]	13.5 [0.118]
SMA up to 26.5 GHz	7.7 [0.303]	13.5 [0.118]
SMA 2.9 up to 40 GHz	6.7 [0.264]	21 [0.827]
2.4 mm up to 50 GHz	6.7 [0.264]	21 [0.827]
1.85 mm up to 67 GHz	6.7 [0.264]	-


Notes
All dimensions are in millimeters [inches].
See page 3-14 for pin indentification.


RAMSES Series

R585 SERIES

ACCESSORIES

A printed circuit board interface connector (ordered separately) has been designed for easy mounting on terminals.
For DP3T model R585 series = Radiall part number: R599910000.

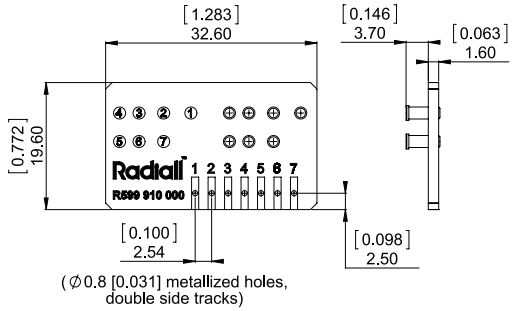

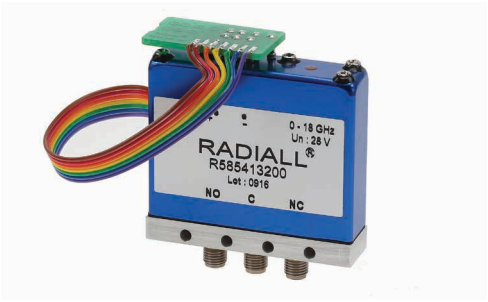

Notes

All dimensions are in millimeters [inches].
PCB accessory pin number assignment is independant from the pin identification table of the switch.


Electrical Schematics

COAXIAL DP3T & TERMINATED SPDT


R585 SERIES

FAILSAFE


WITHOUT OPTION
R585-1-000/R585-1-200/R585-1-400

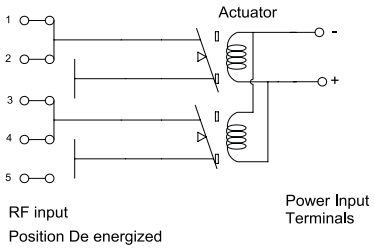


WITH INDICATOR CONTACT
R585-2-000/R585-2-200/R585-2-400

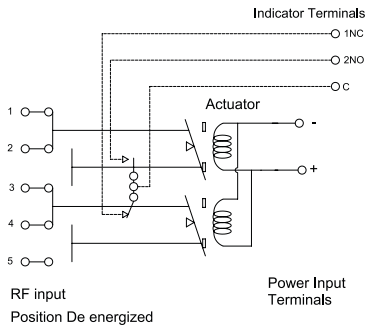


WITH SUPPRESSION DIODES
R585-1-030/R585-1-230/R585-1-430

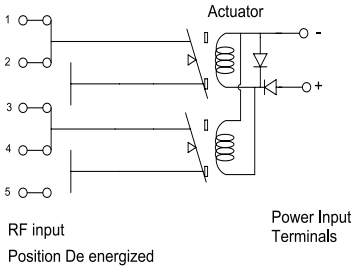


WITH SUPPRESSION DIODES & INDICATOR CONTACT
R585-2-030/R585-2-230/R585-2-430

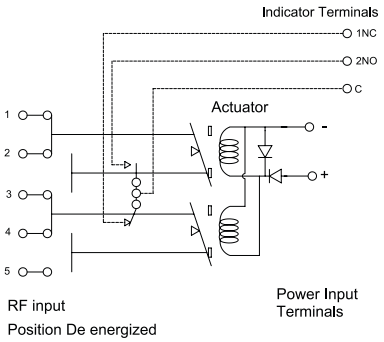

WITH TTL DRIVER (SUPRESSION DIODES ARE INCLUDED)
R585-1-100/R585-1-300/R585-1-500

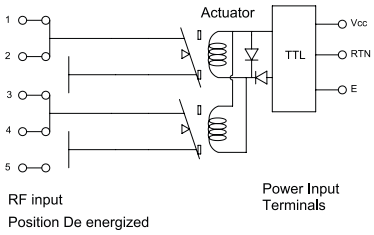

WITH TTL DRIVER & INDICATOR CONTACT (SUPRESSION DIODES ARE INCLUDED)
R585-2-100/R585-2-300/R585-2-500

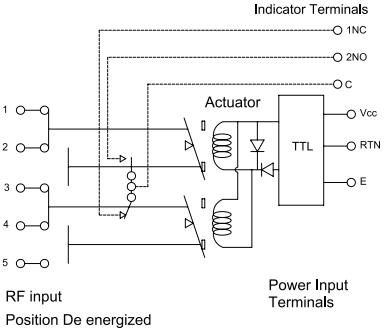


Electrical Schematics

COAXIAL DP3T & TERMINATED SPDT


R585 SERIES

NORMALLY OPEN


WITHOUT OPTION
R585-7-000/R585-7-200/R585-7-400

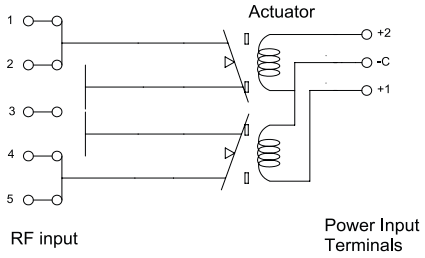


WITH INDICATOR CONTACT
R585-8-000/R585-8-200/R585-8-400

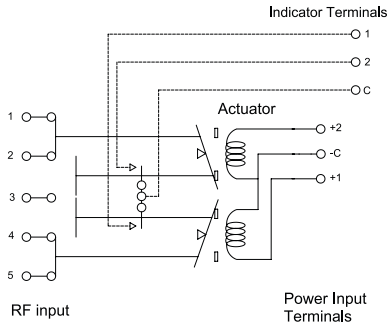


WITH SUPPRESSION DIODES
R585-7-030/R585-7-230/R585-7-430

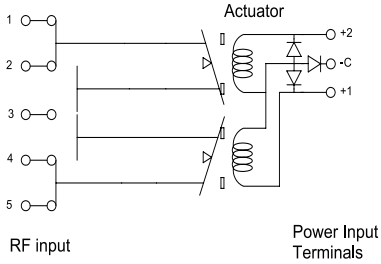


WITH SUPPRESSION DIODES & INDICATOR CONTACT
R585-8-030/R585-8-230/R585-8-430

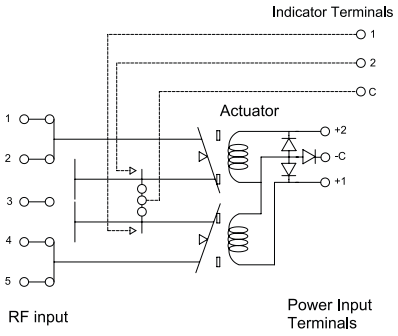

WITH TTL DRIVER (SUPRESSION DIODES ARE INCLUDED)
R585-7-100/R585-7-300/R585-7-500

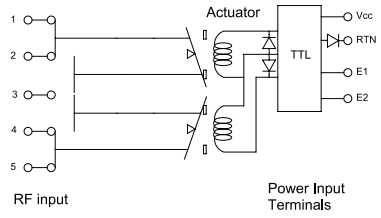

WITH TTL DRIVER & INDICATOR CONTACT (SUPRESSION DIODES ARE INCLUDED)
R585-8-100/R585-8-300/R585-8-500

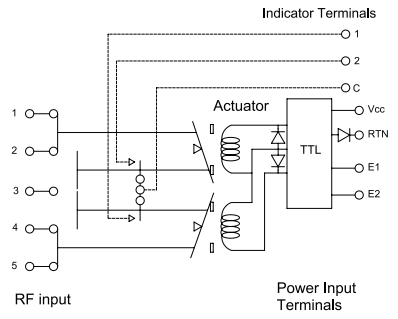


Electrical Schematics

COAXIAL DP3T & TERMINATED SPDT


R585 SERIES

NORMALLY OPEN & LATCHING


WITH POSITIVE COMMON, NO OPTION
R585-7-010/R585-7-210/R585-7-410

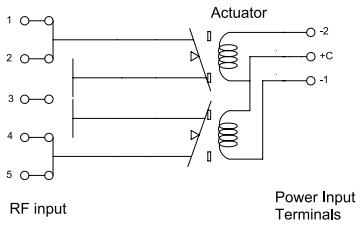


WITH POSITIVE COMMON & INDICATOR CONTACT
R585-8-010/R585-8-210/R585-8-410

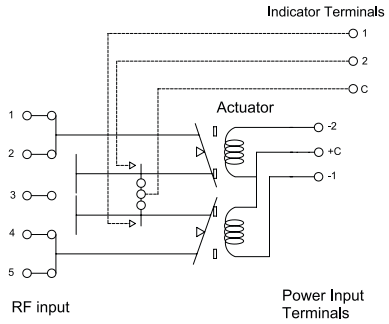


WITH POSITIVE COMMON & SUPPRESSION DIODES
R585-7-040/R585-7-240/R585-7-440

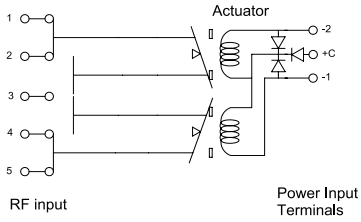


WITH POSITIVE COMMON, INDICATOR CONTACT & SUPPRESSION DIODES
R585-8-040/R585-8-240/R585-8-440

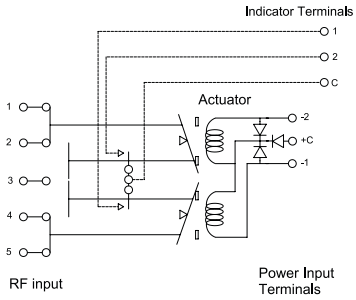

WITHOUT OPTION
R585-3-000/R585-3-200/R585-3-400

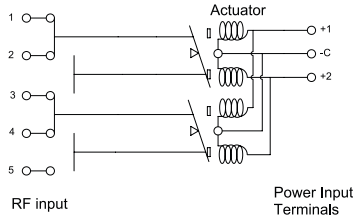

WITH INDICATOR CONTACT
R585-4-000/R585-4-200/R585-4-400

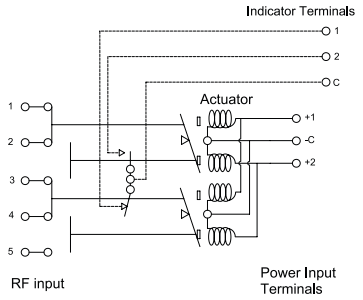


Electrical Schematics

COAXIAL DP3T & TERMINATED SPDT


R585 SERIES

LATCHING


WITH SUPPRESSION DIODES
R585-3-030/R585-3-230/R585-3-430

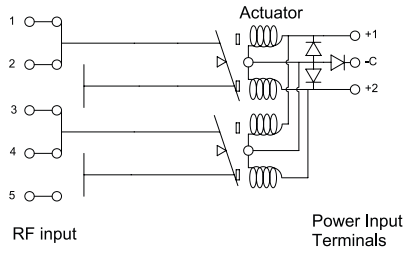


WITH SUPPRESSION DIODES & INDICATOR CONTACT
R585-4-030/R585-4-230/R585-4-430

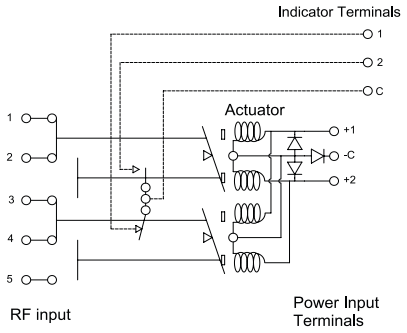


WITH TTL DRIVER (SUPPRESSION DIODES ARE INCLUDED)
R585-3-100/R585-3-300/R585-3-500

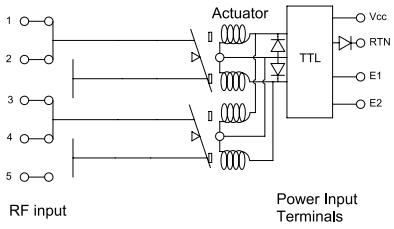


WITH TTL DRIVER & INDICATOR CONTACT (SUPPRESSION DIODES ARE INCLUDED)
R585-4-100/R585-4-300/R585-4-500

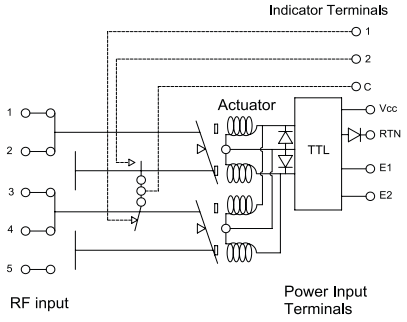

WITH CUT-OFF (SUPRESSION DIODES ARE INCLUDED)
R585-5-000/R585-5-200/R585-5-400

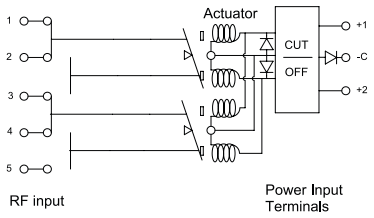

WITH CUT-OFF & INDICATOR CONTACT (SUPRESSION DIODES ARE INCLUDED)
R585-6-000/ R585-6-200/R585-6-400

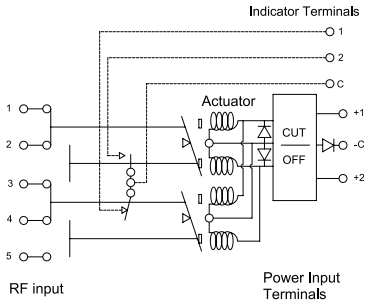


Electrical Schematics

COAXIAL DP3T & TERMINATED SPDT (CONTINUED)


R585 SERIES

LATCHING


WITH CUT-OFF & TTL DRIVER (SUPPRESSION DIODES ARE INCLUDED) R585-5-100/R585-5-300/R585-5-500

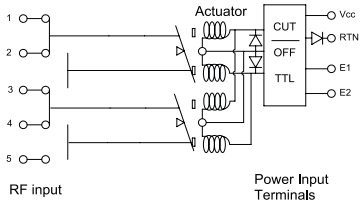


WITH CUT-OFF, TTL DRIVER & INDICATOR CONTACT (SUPPRESSION DIODES ARE INCLUDED) R585-6-100/R585-6-300/R585-6-500

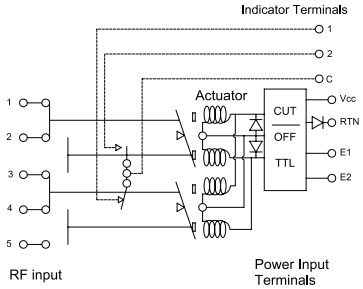


WITH POSITIVE COMMON, NO OPTION R585-3-010/R585-3-210/R585-3-410

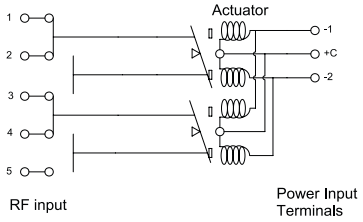


WITH POSITIVE COMMON & INDICATOR CONTACT R585-4-010/R585-4-210/R585-4-410

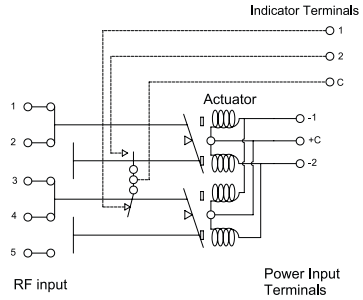

WITH POSITIVE COMMON & SUPPRESSION DIODES R585-3-040/R585-3-240/R585-3-440

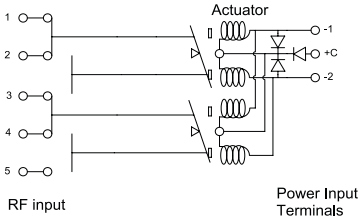

WITH POSITIVE COMMON, SUPPRESSION DIODES & INDICATOR CONTACT R585-4-040/R585-4-240/R585-4-440

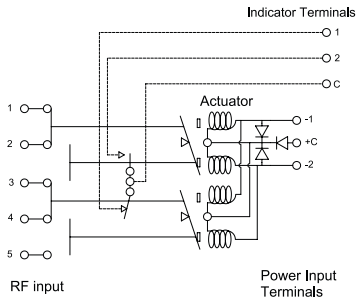


Electrical Schematics

COAXIAL DP3T & TERMINATED SPDT (CONTINUED)


R585 SERIES

LATCHING

WITH POSITIVE COMMON & CUT-OFF (SUPPRESSION DIODES ARE INCLUDED)
R585-5-010/R585-5-210/R585-5-410

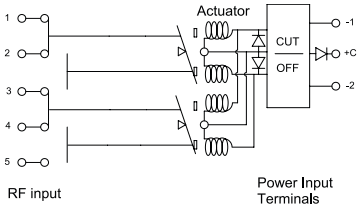


WITH POSITIVE COMMON, CUT-OFF & INDICATOR CONTACT (SUPPRESSION DIODES ARE INCLUDED)
R585-6-010/R585-6-210/R585-6-410

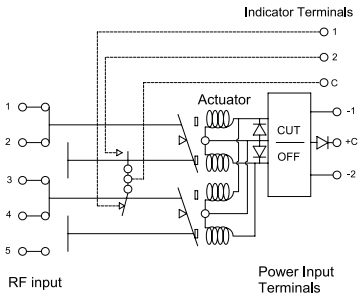

PIN IDENTIFICATION

TYPE	PIN						
	1	2	3	4	6	7	8
Failsafe	+		–				
Failsafe + I.C.	+		–		2NO	1NC	C
Failsafe + TTL	E		RTN	VCC			
Failsafe + I.C. + TTL	E		RTN	VCC	2N0	1NC	C
Latching Latching + Cut-Off	-2 or +2	-1 or +1	+C or -C				
Latching + I.C. Latching + I.C. + Cut-Off	-2 or +2	-1 or +1	+C or -C		2	1	C
Latching + TTL Latching + TTL + Cut-Off	E2	E1	RTN	VCC			
Latching + TTL + I.C. Latching + TTL + I.C. Cut-Off	E2	E1	RTN	VCC	2	1	C
Normally open	-2 or +2	-1 or +1	+C or -C				
Normally open + I.C.	-2 or +2	-1 or +1	+C or -C		2	1	C
Normally open + TTL	E2	E1	RTN	VCC			
Normally open + TTL + I.C.	E2	E1	RTN	VCC	2	1	C

Top View



Platinum Series

HIGH PERFORMANCE DP3T & TERMINATED SPDT UP TO 40 GHz

SMA - SMA 2.9



Radiall's PLATINUM series switches are optimized to perform at a high level over an extended life cycle. With outstanding RF performance, and a guaranteed insertion loss repeatability of 0.03 dB over a life span of 10 million switching cycles. PLATINUM series switches are perfect for automated test and measurement equipment, as well as signal monitoring devices.

Example of P/N: R595F63215 is a Terminated SPDT SMA 26.5 GHz, latching with Self Cut-Off, 24 Vdc, Indicators, D-Sub connector.

PART NUMBER SELECTION

R595

SERIES PREFIX

RF CONNECTORS
3: SMA up to 6 GHz [2]
4: SMA up to 20 GHz [2]
F: SMA up to 26.5 GHz [2]
8: SMA 2.9 up to 40 GHz [1 & 3]

TYPE
3: Latching
4: Latching + I.C.
5: Latching + S.C.O.
6: Latching + S.C.O. + I.C.

ACTUATOR VOLTAGE
3: 24 Vdc
7: 15 Vdc

SWITCH MODEL
2: Terminated SPDT switch
3: Terminated 4 port bypass switch
4: Non-terminated 5 port DP3T switch

OPTIONS
1: Without option (positive common)
2: Compatible TTL driver

ACTUATOR TERMINALS
0: Solder pins
5: D-Sub connector

DOCUMENTATION
-: Certificate of conformity
C: Calibration certificate
R: Calibration certificate + RF curves

Notes

I.C.: Indicator contact/S.C.O.: Self Cut-Off.
1. Connector SMA 2.9 is equivalent to "K connector®", registered trademark of Anritsu.
2. The terminated models are fitted with internal terminations.
3. The terminated models are fitted with external terminations.

Platinum Series

GENERAL SPECIFICATIONS

OPERATING MODE		LATCHING	
Nominal operating voltage (across operating temperature)	Vdc	24 (20 to 32)	15 (12 to 20)
Coil resistance (+/-10%)	Ω	175	60
Nominal operating current at 23 °C	mA	140	250
Average power		RF path - Cold switching: see Power Chart on page 3-23 Hot switching: 1 Watt CW	
		Internal terminations - 1 Watt average into 50 Ω External terminations - 1 Watt average into 50 Ω	
TTL input	High Level	3 to 7 V: 800 µA max at 7 V	
	Low Level	0 to 0.8 V: 20 µA max at 0.8 V	
Switching time (max)	ms	15	
Life	SMA	10 million cycles	
	SMA 2.9		
Connectors		SMA - SMA 2.9	
Actuator terminals		D-Sub 9 pin female Solder pins	
Weight	g	< 100	

ENVIRONMENTAL SPECIFICATIONS


Operating temperature range	-25 °C to +75 °C
Storage temperature range	-55 °C to +85 °C
Temperature cycling (MIL STD 202F, Method 107D, Cond.A)	-55 °C to +85 °C (10 cycles)
Sine vibration operating (MIL STD 202, Method 204D, Cond.D)	10-2000 Hz, 20 g
Random vibration operating	16.91 G (rms) 50-2000 Hz 3 min/axis
Shock operating (MIL STD 202, Method 213B, Cond.G)	50 g/11 ms, sawtooth
Humidity operating	15 to 95% relative humidity
Humidity storage (MIL STD 202, Method 106E, Cond.E)	65 °C, 95% RH, 10 days
Altitude operating	15000 ft (4600 meters)
Altitude storage (MIL STD 202, Method 105C, Cond.B)	50000 ft (15240 meters)

Platinum Series


RF PERFORMANCE

PART NUMBER		R5953-----	R5954-----		R595F-----		R5958-----	
Frequency Range	GHz	DC to 6	DC to 20		DC to 26.5		DC to 40	
Impedance	Ω	50						
Insertion Loss (max)	dB	0.20 + (0.45 / 26.5) x frequency (GHz)						
Isolation (min)		85	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz	85 75 65	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz	85 75 65 60	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz 26.5 to 40 GHz	85 75 65 60 55
V.S.W.R. (max)		1.15	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz	1.15 1.25 1.30	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz	1.15 1.25 1.30 1.60	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz 26.5 to 40 GHz	1.15 1.25 1.30 1.60 1.80
Repeatability (Up to 10 million cycles at 25 °C)		0.03 dB maximum					0.05 dB maximum	

INSERTION LOSS & ISOLATION

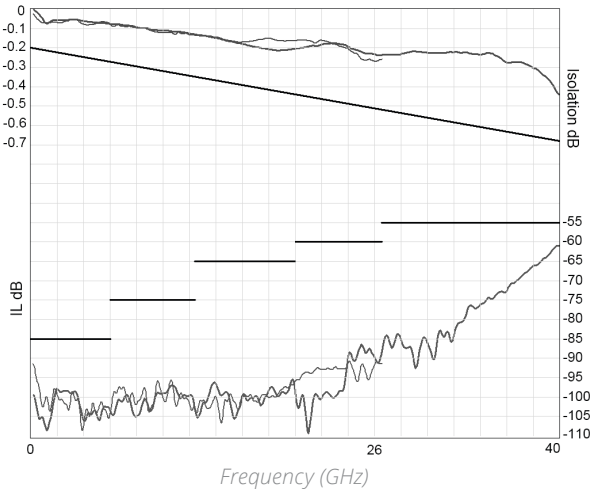

V.S.W.R

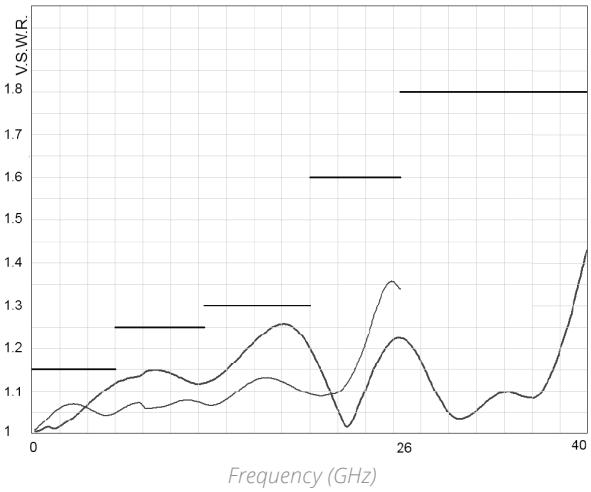

SMA —— **SMA 2.9** ——


Platinum Series

SWITCH MODEL: NON-TERMINATED SPDT SWITCH


The terminated SPDT switch is a single pole double throw switch where unused ports are terminated into 50 ohms. This switch is considered a “break-before-make.”

RF Schematic Diagram

POSITION E1




POSITION E2




Position Indicator

STATE 11



STATE 22




Standard drive option “1”
(Positive common):


- Connect pin +Vcc to supply (+20 Vdc to +32 Vdc)
- Select desired RF path by applying ground to the corresponding "close" pin (Ex: ground pin E1 to switch to position E1. RF path 1-2 closed and RF path 2-3 open)
- To open desired path and close the new RF path, connect ground to the corresponding "close" pin (Ex: ground pin E2 to open RF path 1-2 and close RF path 2-3)

TTL drive option “2”


- Connect pin GND to ground
- Connect pin +Vcc to supply (+20 Vdc to +32 Vdc)
- Select (close) desired RF path by applying TTL "High" to the corresponding "drive" pin. (Ex: apply TTL "High" to pin E1 to switch to position E1. RF path 1-2 closed and RF path 2-3 open)
- To open desired path and close the new RF path, apply TTL "High" to the "drive" pin which corresponds to the desired RF path. (Ex: apply TTL “High” to pin E2 to open RF path 1-2 and close RF path 2-3)




D-Sub connector



Solder pins



D-Sub connector




Solder pins


Platinum Series

SWITCH MODEL: TERMINATED SPDT SWITCH

WITH D-SUB CONNECTOR

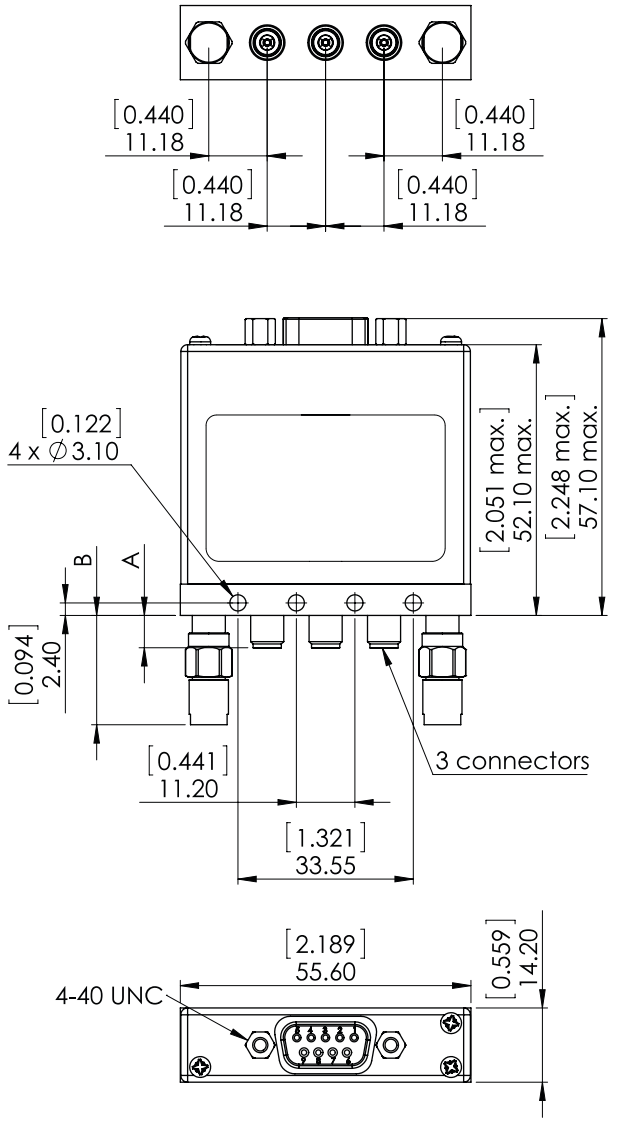

WITH SOLDER PINS

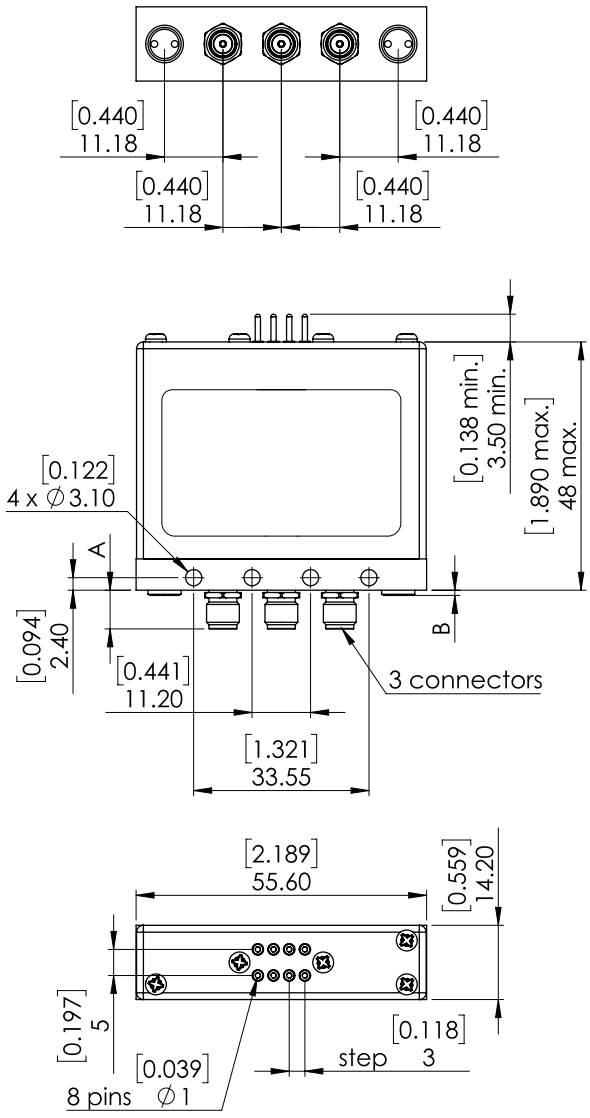

CONNECTORS	A MAX (MM [INCHES])	B MAX (MM [INCHES])	TERMINATIONS
SMA	7.7 [0.303]	1.5 [0.059]	Internal
SMA 2.9	6.7 [0.264]	21 [0.827]	External

Notes

All dimensions are in millimeters [inches].

Platinum Series


SWITCH MODEL: TERMINATED 4-PORT BYPASS SWITCH

The terminated 4 port bypass switch can terminate into the 50 ohms device under test.


This switch is considered a “break-before-make.”

RF Schematic Diagram

POSITION E1




POSITION E2




Position Indicators

STATE 11



STATE 22




Standard drive option “1”
(Positive common):


- Connect pin +Vcc to supply (+20 Vdc to +32 Vdc).
- Select desired RF path by applying ground to the corresponding "close" pin (Ex: ground pin E1 to switch to position E1. RF path 1-2 and RF path 3-4 closed and RF path 2-3 open).
- To open desired path and close the new RF path, connect ground to the corresponding "close" pin (Ex: ground pin E2 to open RF path 1-2 and 3-4 and close RF path 2-3).

TTL drive option “2”


- Connect pin GND to ground
- Connect pin +Vcc to supply (+20 Vdc to +32 Vdc)
- Select (close) desired RF path by applying TTL "High" to the corresponding "drive" pin (Ex: apply TTL "High" to pin E1 to switch to position E1. RF path 1-2 and 3-4 closed and RF path 2-3 open)
- To open desired path and close the new RF path, apply TTL "High" to the "drive" pin which corresponds to the desired RF path (Ex: apply TTL “High” to pin E2 to open RF path 1-2 and 3-4 and close RF path 2-3)




D-Sub connector



Solder pins




D-Sub connector




Solder pins

Platinum Series

WITH D-SUB CONNECTOR

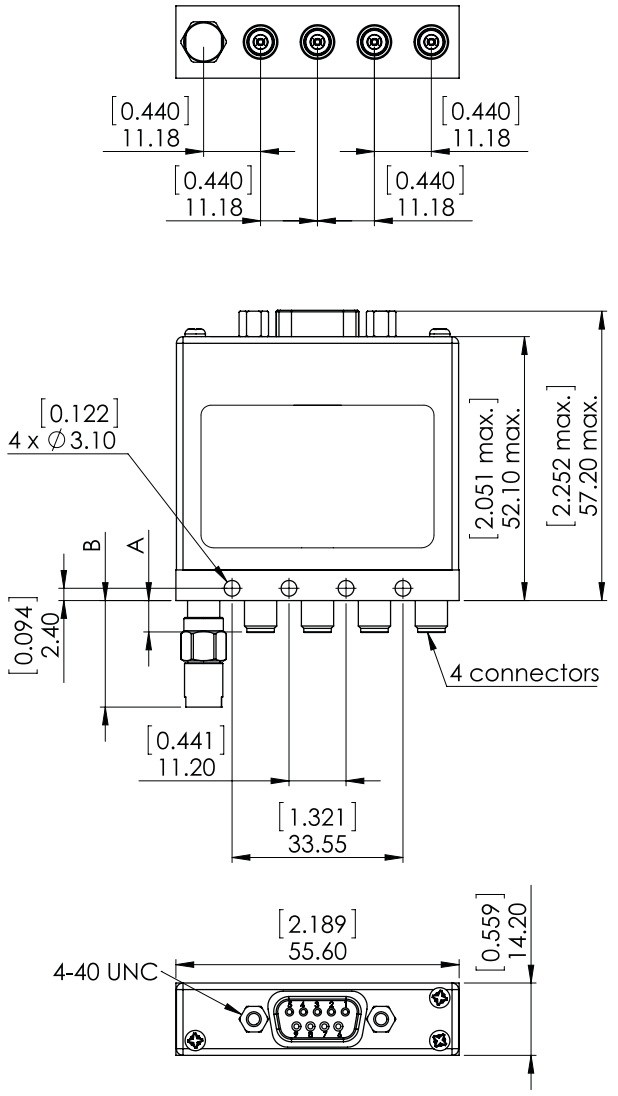

WITH SOLDER PINS

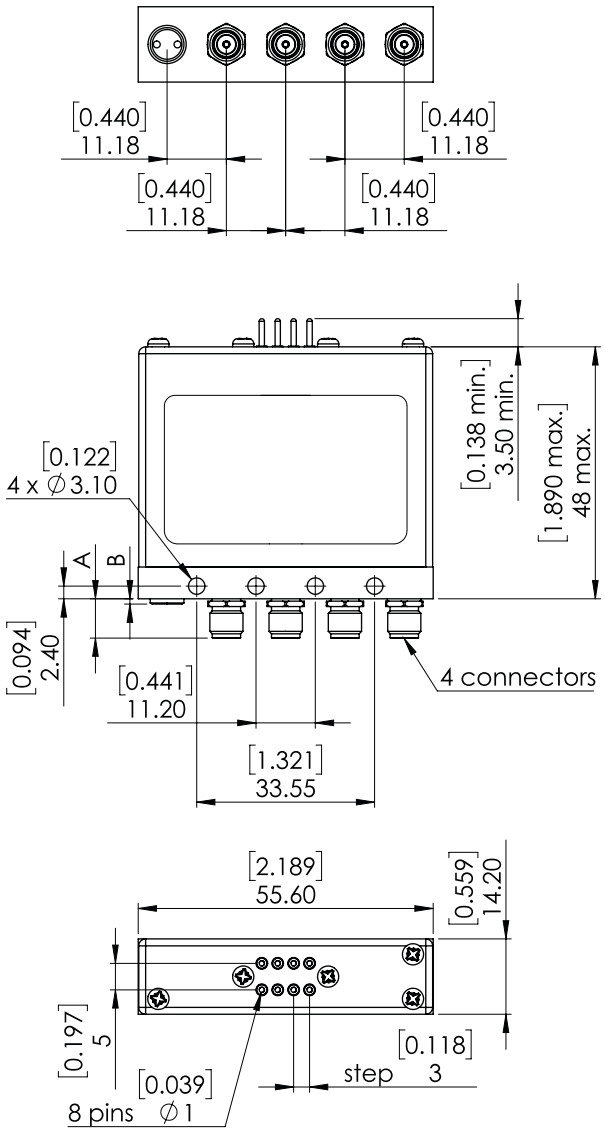

CONNECTORS	A MAX (MM [INCHES])	B MAX (MM [INCHES])	TERMINATIONS
SMA	7.7 [0.303]	1.5 [0.059]	Internal
SMA 2.9	6.7 [0.264]	21 [0.827]	External

Notes

All dimensions are in millimeters [inches].


Platinum Series

SWITCH MODEL: TERMINATED 5-PORT DP3T SWITCH


The non-terminated 5 port DP3T switch can be used as SPDT with high power terminations, as a bypass switch. In this application, the fifth port can be terminated externally with a high power termination. These switches are considered a "break-before-make."

RF Schematic Diagram

POSITION E1

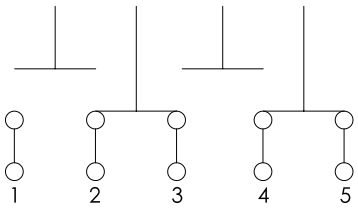


POSITION E2

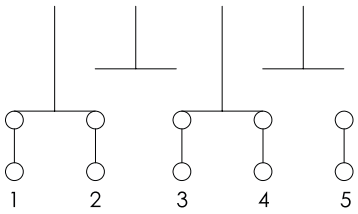


Position Indicators

STATE 11



STATE 22




Standard drive option "1"
(Positive common):


- Connect pin +Vcc to supply (+20 Vdc to +32 Vdc)
- Select desired RF path by applying ground to the corresponding "close" pin (Ex: ground pin E1 to switch to position E1. RF path 2-3 and RF path 4-5 closed and RF path 1-2 and RF path 3-4 open)
- To open desired path and close the new RF path, connect ground to the corresponding "close" pin (Ex: ground pin E2 to open RF path 2-3 and 4-5 and close RF path 1-2 and 3-4)

TTL drive option "2"


- Connect pin GND to ground
- Connect pin +Vcc to supply (+20 Vdc to +32 Vdc)
- Select (close) desired RF path by applying TTL "High" to the corresponding "drive" pin (Ex: apply TTL "High" to pin E1 to switch to position E1. RF path 2-3 and RF path 4-5 closed and RF path 1-2 and 3-4 open)
- To open desired path and close the new RF path, apply TTL "High" to the "drive" pin which corresponds to the desired RF path. (Ex: apply TTL "High" to pin E2 to open RF path 2-3 and 4-5 and close RF path 1-2 and 3-4)




D-Sub connector



Solder pins



D-Sub connector




Solder pins


Platinum Series

NON-TERMINATED 5 PORT DP3T SWITCH

WITH D-SUB CONNECTOR

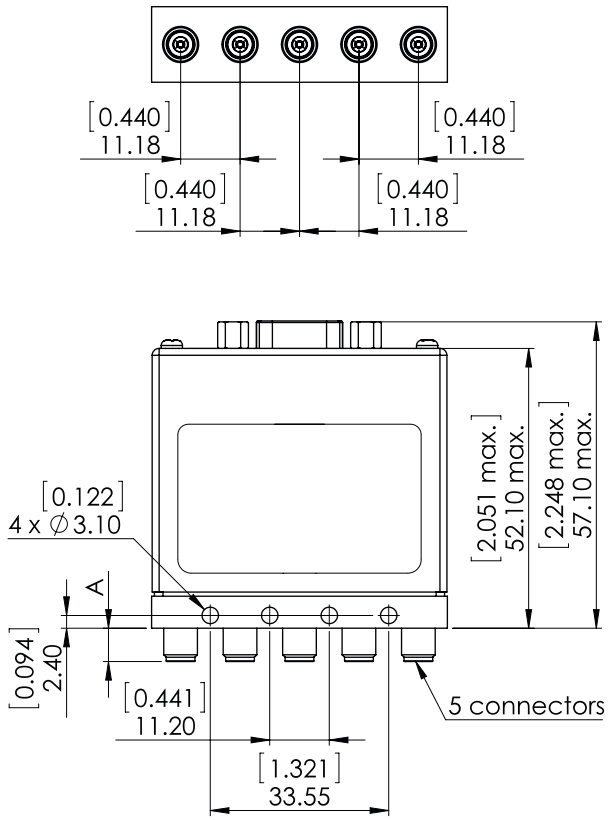

WITH SOLDER PINS

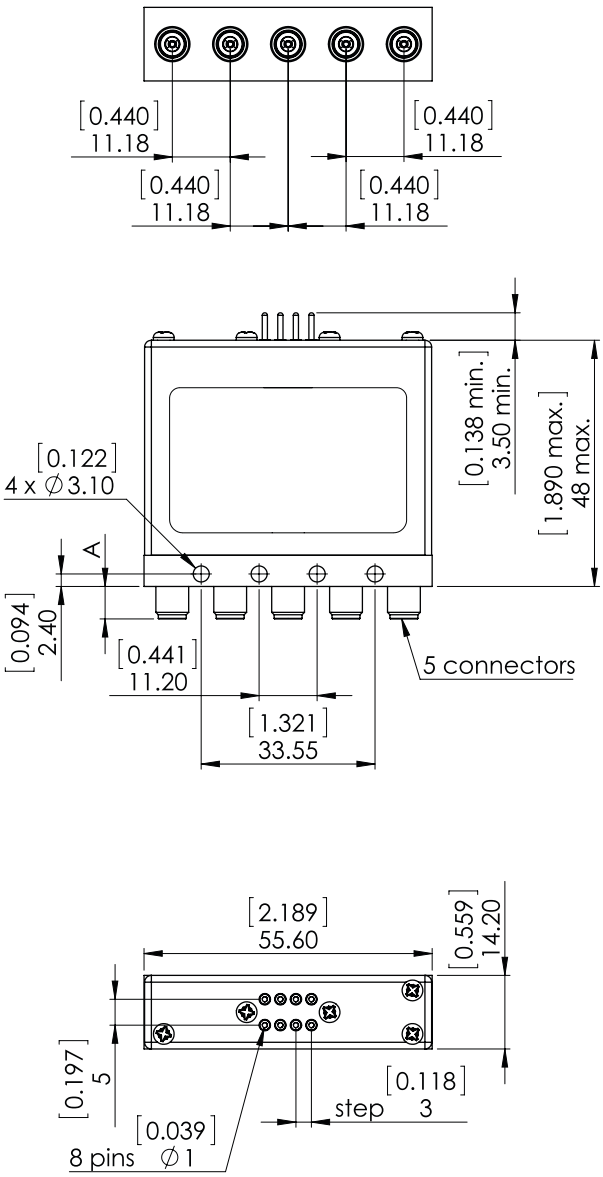

CONNECTORS	A MAX (mm [INCHES])
SMA	7.7 [0.303]
SMA 2.9	6.7 [0.264]

Notes


All dimensions are in millimeters [inches].

Platinum Series

POWER RATING CHART


This graph is based on the following conditions:

- *Ambient temperature: + 25 °C*
- *Sea level*
- *V.S.W.R.: 1 and cold switching*

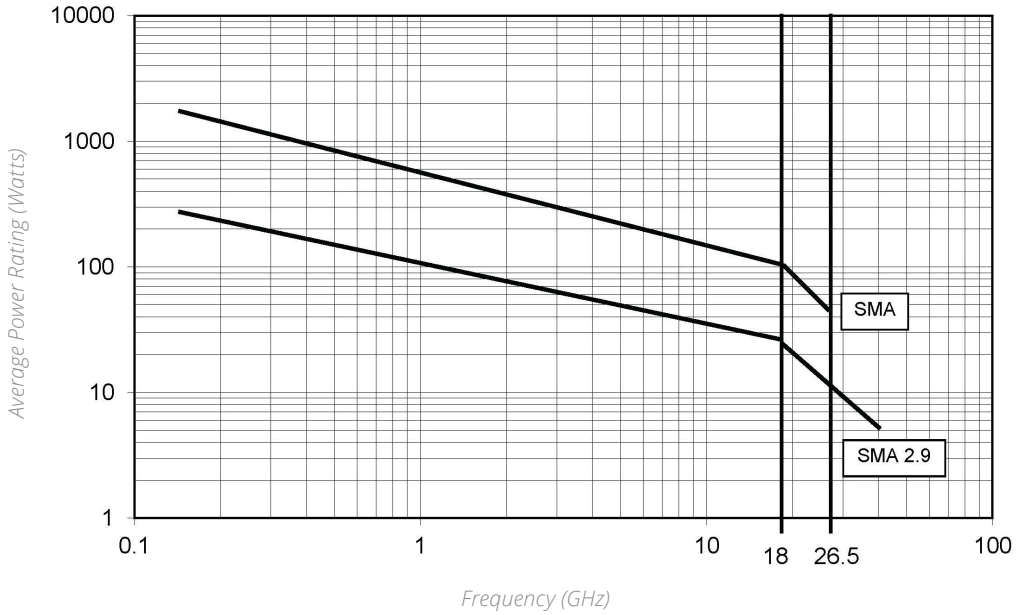

DERATING FACTOR VERSUS VSWR

The average power input must be reduced for load V.S.W.R. above 1:1

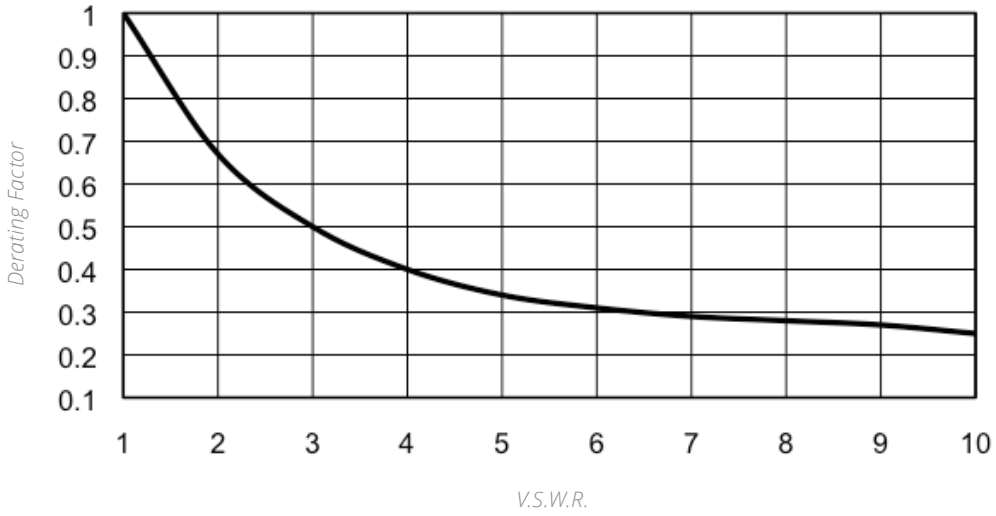


Optional Features

OPTIONAL FEATURES FOR DP3T SWITCHES

GENERAL

RADIALL DP3T / SPDT terminated are only designed with SMA, SMA 2.9 and 2.4 mm connectors. For all other connectors (N, BNC etc.), the same function as SPDT terminated can be easily performed with a standard DPDT and an external load.



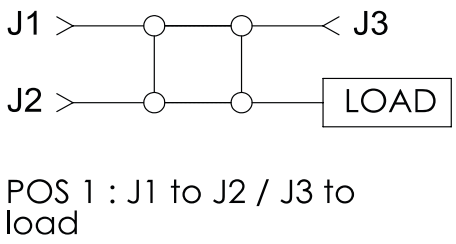

EXAMPLES OF DEDICATED APPLICATIONS




This SPDT terminated switch is composed of a DP3T with SMA connectors, and cable load for medium power terminations. The Key advantage of this solution is the ability to mount the switch with external terminations at the desired power level.



This is an example of an SPDT terminated switch that was designed with two seperate coils for a specific test network application.

Notes

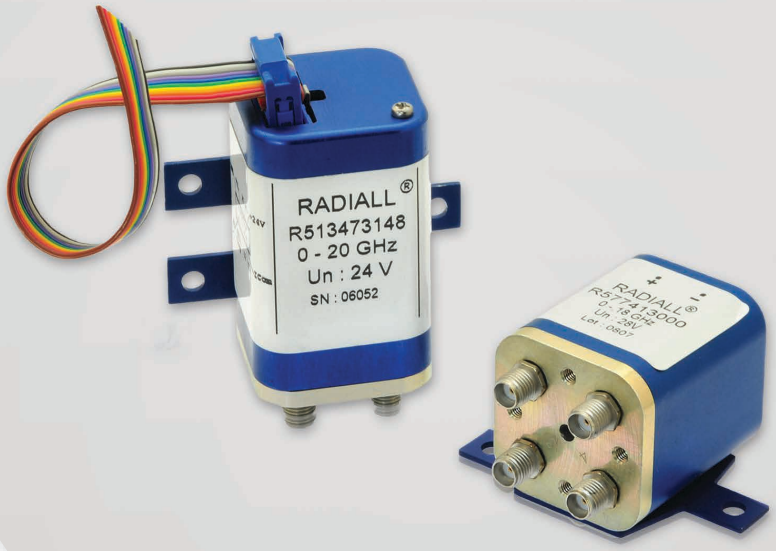

DPDT

Section 4 Table of Contents

RAMSES SERIES
DPDT up to 50 GHz: R577 miniature ..... 4-2 to 4-5
DPDT up to 12.4 GHz RAMSES Concept: N, BNC and TNC models ..... 4-6 to 4-9

ELECTRICAL SCHEMATICS
Coaxial DPDT: R577 Series ..... 4-10 to 4-13

TITANIUM SERIES
High performance DPDT Series DC - 40 GHz: R513 Series ..... 4-14 to 4-19

PLATINUM SERIES
High performance DPDT up to 40 GHz: R593 Series ..... 4-20 to 4-25

OPTIONAL FEATURES
Optional Featues for DPDT switches 4-26

DPDT PART NUMBER SELECTION GUIDE[1]

DIGITAL POSITION	R 1-3	4: RF CONNECTORS																5: TYPE		6: VOLTAGE			7: TTL OPT.		8: OPTIONS				9: TERMINALS					
Series	RAMSES	-	SMA 3 GHz	SMA 6 GHz	SMA 18 GHz	SMA 20 GHz	SMA 26.5 GHz	SMA 2.9 40 GHz	2.4 mm up to 50 GHz	QMA 6 GHz	DIN 1.6/5.6, 2.5 GHz	N 3 GHz	N 12.4 GHz	BNC 3 GHz	TNC 3 GHz	TNC 12.4 GHz		Failsafe	Latching	12 V	24 V	28 V	Without	With option	Without option	Positive common	Supression diodes	Suppression diodes and positive common	Solder pins with bracket	Solder pins without bracket	D-Sub connector with bracket	D-Sub connector without bracket	HE 10 with bracket	HE 10 without bracket
Configuration	DPDT																																	
	DPDT	R577	3	-	4	-	F	8	J	E	9	-	-	-	-	-		1/2	3/4/5/6	2	-	3	0	1	0	1	3	4	0	2	5	7	-	-
		R577	-	-	-	-	-	-	-	-	-	0	1	2	5	6		1/2	3/4/5/6	2	-	3	0	1	0	1	3	4	0	2	5	7	-	-
TITANIUM	DPDT	R513	-	3	-	4	F	8	-	-	-	-	-	-	-	-		-	7	-	3	-	-	1	-	-	-	4	-	-	-	-	8	9
PLATINUM	DPDT	R593	-	3	-	4	F	8	-	-	-	-	-	-	-	-		-	7	-	3	-	-	1	-	-	-	4	-	-	-	-	8	9

Notes

Example of P/N: R577412020 is a DPDT SMA 18 GHz failsafe, 12 Vdc, without TTL driver, solder pins with bracket.

1. For part number creation and available options, see detailed part number selection for each series.

RAMSES Series

DPDT UP TO 50 GHz

SMA – SMA 2.9 - 2.4 MM - QMA – DIN 1.6/5.6



Radiall's DPDT switches offer excellent reliability, high performance and operating frequencies from DC to 50 GHz. Radiall's RAMSES concept guarantees a life span of 2.5 million cycles and provides a full array of options to respond to the needs of our customers.

These relays are well suited for applications across all markets including: Defense, Instrumentation, and Telecom.

Example of P/N: R577F63105 is a DPDT SMA 26.5 GHz latching with Indicators, Self Cut-Off, 28 Vdc, TTL driver, D-Sub connector.

PART NUMBER SELECTION

R577

SERIES PREFIX

RF CONNECTORS
3: SMA up to 3 GHz
4: SMA up to 18 GHz
F: SMA up to 26.5 GHz
8: SMA 2.9 up to 40 GHz [5]
9: DIN 1.6/5.6 up to 2.5 GHz
J: 2.4 mm up to 50 GHz
E: QMA up to 6 GHz [4]

TYPE
1: Failsafe
2: Failsafe + I.C.
3: Latching
4: Latching + I.C.
5: Latching + S.C.O. [1]
6: Latching + S.C.O. + I.C. [1]

ACTUATOR VOLTAGE
2: 12 Vdc
3: 28 Vdc

ACTUATOR TERMINALS & FIXING
0: Solder pins with bracket
2: Solder pins without bracket
5: D-Sub connector with bracket
7: D-Sub connector without bracket

OPTIONS
0: Without option
1: Positive common [2 & 3]
3: With suppression diodes [1]
4: With suppression diodes and positive common [2 & 3]

TTL OPTION
0: Without TTL driver
1: With TTL driver [1 & 2]

Notes

I.C.: Indicator contact/S.C.O.: Self Cut-Off.
1. Suppression diodes are already included in self cut-off & TTL option.
2. Polarity is not relevant to application for switches with TTL driver.
3. Positive common shall be specified only with type 3,4,5 and 6 because failsafe switches can be used with both polarities.
4. The QLF tradermark (Quick Lock Formula®) standard applies to QMA and QN series and guaranties the full intermateability between suppliers using this tradermark. Using QLF certified connectors also guarantees the specified level of RF performance.
5. Connector SMA 2.9 is equivalent to "K connector®", registered trademark of Anritsu.

GENERAL SPECIFICATIONS

OPERATING MODE		FAILSAFE		LATCHING	
Nominal operating voltage (across operating temperature)	Vdc	12 (10.2 / 13)	28 (24 / 30)	12 (10.2 / 13)	28 (24 / 30)
Coil resistance (+/-10%)	Ω	35	200	38	225
Nominal operating current at 23 °C	mA	340	140	320	125
Average power		See Power Rating Chart page 1-13			
TTL input	High Level	2.2 to 5.5 Volts - 800 µA max 5.5 Volts			
	Low Level	0 to 0.8 Volts - 20 µA max 0.8 Volts			
Indicator rating		1 W/30 V/100 mA			
Switching time (max)	ms	15			
Life	SMA - SMA 2.9 - QMA - DIN 1.6/5.6	2.5 million cycles			
	2.4 mm	2 million cycles			
Connectors		SMA - SMA 2.9 - QMA - DIN 1.6/5.6 – 2.4 mm			
Actuator terminals		Solder pins or male 9 pin D-Sub connector			
Operating temperature range	DIN 1.6/5.6 – 2.4 mm	-25 °C to +70 °C			
	SMA - SMA 2.9 - QMA	-40 °C to +85 °C			
Storage temperature range	DIN 1.6/5.6 – 2.4 mm	-40 °C to +85 °C			
	SMA - SMA 2.9 - QMA	-55 °C to +85 °C			
Vibration (MIL STD 202, Method 204D, Cond. C)		10-2000 Hz, 10g		Operating	
Shock (MIL STD 202, Method 213B, Cond. G)		50 g/11 ms, ½ sine		Operating	

RF PERFORMANCE


CONNECTORS	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	IMPEDANCE Ω
DIN 1.6/5/6	DC - 2.5	DC - 1	1.20	0.20	80	75
		1 - 2.5	1.30	0.30	70	
QMA	DC - 6	DC - 3	1.20	0.20	80	50
		3 - 6	1.20	0.30	70	
SMA	DC - 3 DC - 18 DC - 26.5	DC - 3	1.20	0.20	80	50
		3 - 8	1.30	0.30	70	
		8 - 12.4	1.40	0.40	65	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.70	0.70	50	
SMA 2.9	DC - 40	DC - 6	1.30	0.30	70	50
		6 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.70	0.70	55	
		26.5 - 40	1.90	0.80	50	
2.4 mm	DC - 50	DC - 6	1.30	0.30	70	50
		6 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.70	0.70	55	
		26.5 - 40	1.90	0.80	50	
		40 - 50	2.00	1.10	50	

See page 4-4 for typical RF performance.


R577 TYPICAL RF PERFORMANCE

Example: DPDT SMA up to 26.5 GHz

INSERTION LOSS & ISOLATION

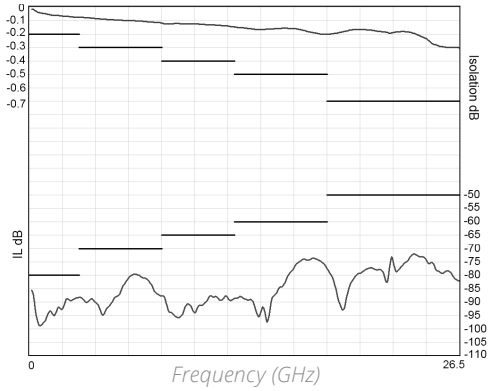


V.S.W.R

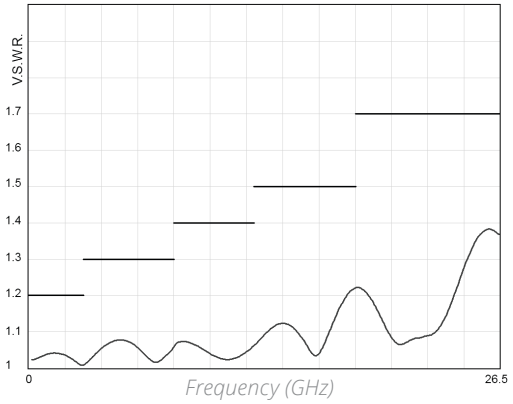


Example: DPDT SMA 2.9 up to 40 GHz

INSERTION LOSS & ISOLATION

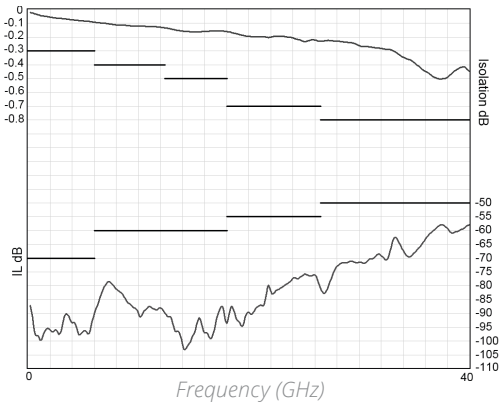


V.S.W.R

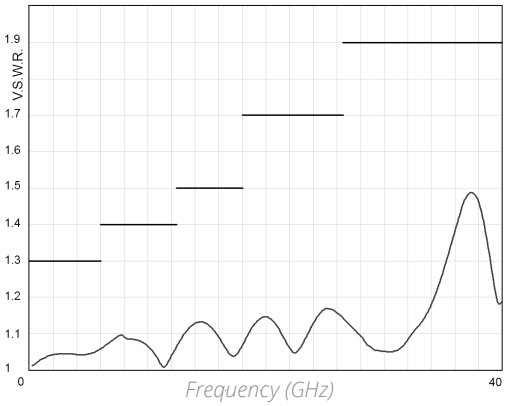


Example: DPDT 2.4 mm up to 50 GHz

INSERTION LOSS & ISOLATION

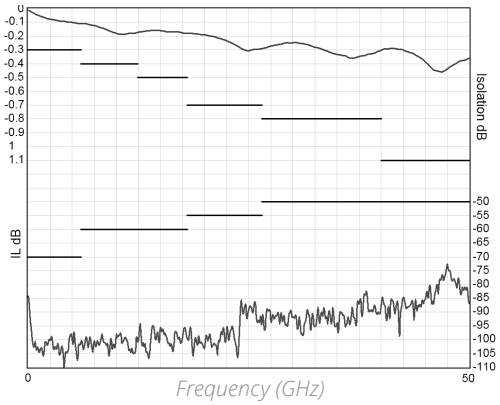


V.S.W.R

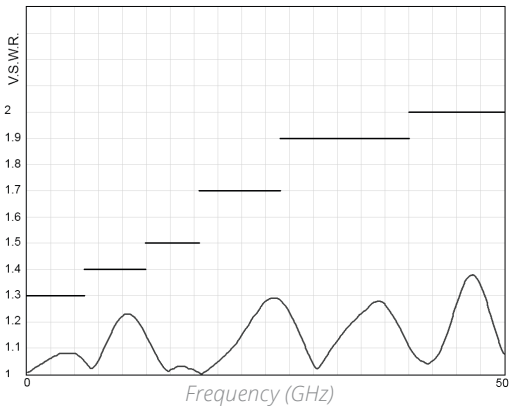


TYPICAL OUTLINE DRAWING

WITH SOLDER PINS & BRACKET

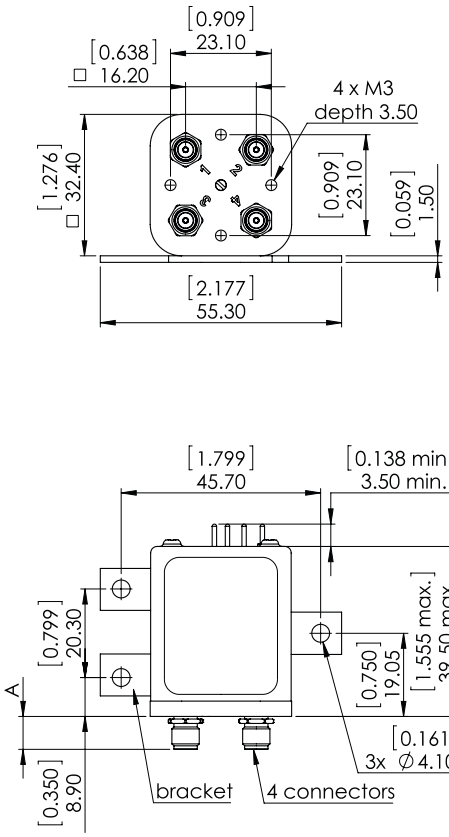


WITH D-SUB CONNECTOR & BRACKET

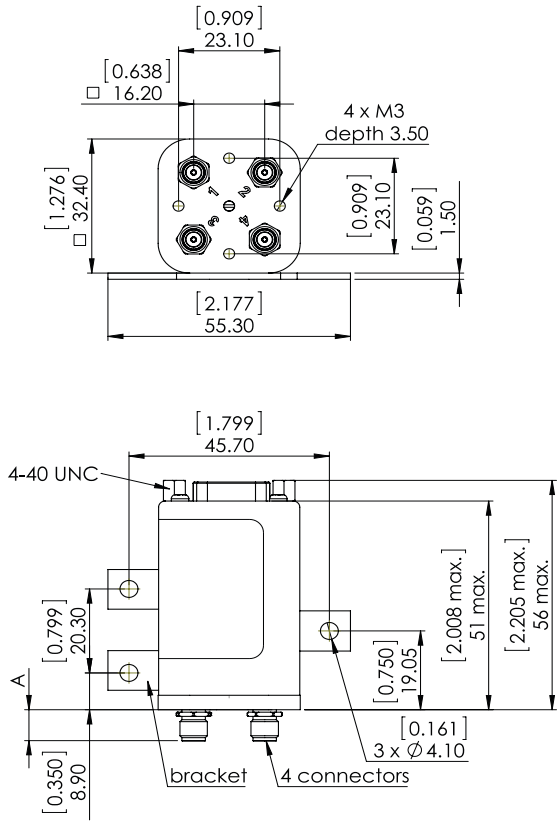

CONNECTORS	SMA	SMA 2.9 & 2.4 mm	QMA	DIN 1.6/5.6
A max (mm [inches])	7.7 [0.303]	6.7 [0.264]	10.8 [0.394]	11.5 [0.433]

ACCESSORIES

A printed circuit board interface connector (ordered separately) has been designed for easy mounting on terminals.
For DPDT model R577 series = Radiall part number: R599 910 000

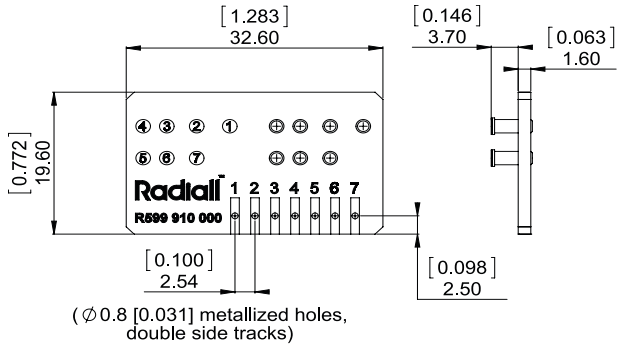



Notes

All dimensions are in millimeters [inches]. PCB accessory pin number assignment is independant from the pin identification table of the switch.

RAMSES Series

DPDT UP TO 12.4 GHz - RAMSES Concept

N - BNC - TNC



Radiall's DPDT switches offer excellent reliability, high performance and operating frequencies from DC to 12.4 GHz. Radiall's RAMSES concept guarantees a life span of 2.5 million cycles and provides a full array of options to respond to the needs of our customers.

These relays are well suited for applications across all markets including: Defense, Instrumentation, and Telecom.

Example of P/N: R577122030 is a DPDT N 12.4 GHz, failsafe with Indicators, 12 Vdc, suppression diodes, solder pins with bracket.

PART NUMBER SELECTION

R577

SERIES PREFIX

RF CONNECTORS
0: N up to 3 GHz
1: N up to 12.4 GHz
2: BNC up to 3 GHz
5: TNC up to 3 GHz
6: TNC up to 12.4 GHz

TYPE
1: Failsafe
2: Failsafe + I.C.
3: Latching
4: Latching + I.C.
5: Latching + S.C.O. [1]
6: Latching + S.C.O. + I.C. [1]

ACTUATOR VOLTAGE
2: 12 Vdc
3: 28 Vdc

TTL OPTION
0: Without TTL driver
1: With TTL driver [1 & 2]

OPTIONS
0: Without option
1: Positive common [2 & 3]
3: With suppression diodes [1]
4: With suppression diodes and positive common [2 & 3]

ACTUATOR TERMINALS & FIXING
0: Solder pins with bracket
2: Solder pins without bracket
5: D-Sub connector with bracket
7: D-Sub connector without bracket

Notes

I.C.: Indicator contact/S.C.O.: Self Cut-Off.
1. Suppression diodes are already included in Self Cut-Off & TTL option.
2. Polarity is not relevant to application for switches with TTL driver.
3. Positive common shall be specified only with type 3,4,5 and 6 because failsafe switches can be used with both polarities.

GENERAL SPECIFICATIONS

OPERATING MODE		FAILSAFE		LATCHING	
Nominal operating voltage (across operating temperature)	Vdc	12 (10.2 / 13)	28 (24 / 30)	12 (10.2 / 13)	28 (24 / 30)
Coil resistance (+/-10%)	Ω	35	200	38	225
Nominal operating current at 23°C	mA	340	140	320	125
Average power		See Power Rating Chart page 1-13			
TTL input	High Level	2.2 to 5.5 Volts			
	Low Level	0 to 0.8 Volts			
Indicator rating		1 W / 30 V / 100 mA			
Switching time (max)	ms	15			
Life		2.5 million cycles			
Connectors		N - BNC - TNC			
Actuator terminals		Solder pins or male 9 pin D-Sub connector			
Operating temperature range		-40°C to +85°C			
Storage temperature range		-55°C to +85°C			
Vibration (MIL STD 202, Method 204D, cond. C)		10 - 2000 Hz, 10g		operating	
Shock (MIL STD 202, Method 213B, cond. G)		50 g / 11 ms, ½ sine		operating	

RF PERFORMANCE


CONNECTORS	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	IMPEDANCE Ω
BNC	DC - 3	DC - 1	1.15	0.15	85	50
		1 - 2	1.20	0.20	80	
		2 - 3	1.25	0.25	75	
N - TNC	DC - 3 DC - 12.4	DC - 1	1.15	0.15	85	
		1 - 2	1.20	0.20	80	
		2 - 3	1.25	0.25	75	
		3 - 8	1.35	0.35	70	
		8 - 12.4	1.50	0.50	60	

See page 4-8 for typical RF performance.


R577 TYPICAL RF PERFORMANCE

Example: DPDT N/TNC up to 12.4 GHz

INSERTION LOSS & ISOLATION

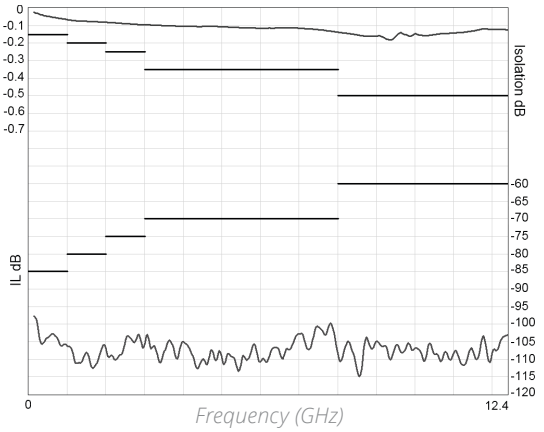


V.S.W.R

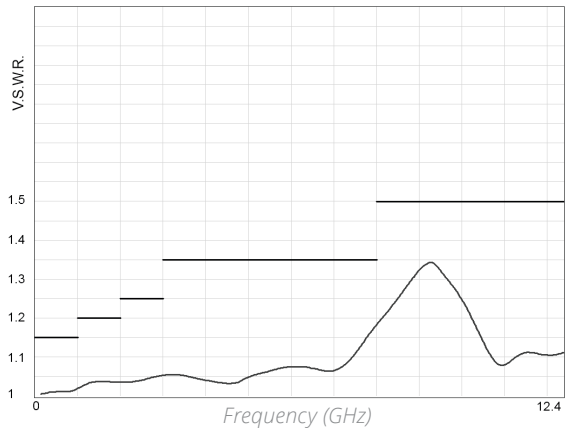


Example: DPDT BNC up to 3 GHz

INSERTION LOSS & ISOLATION

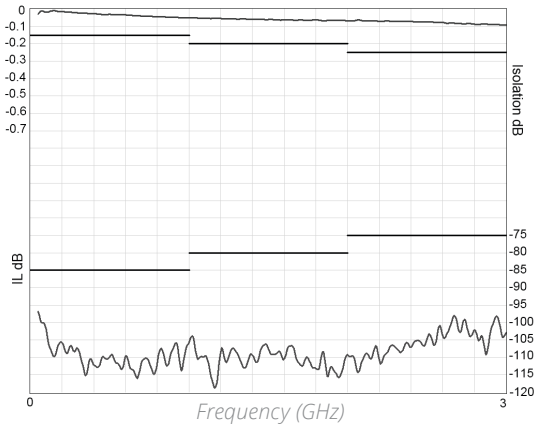


V.S.W.R

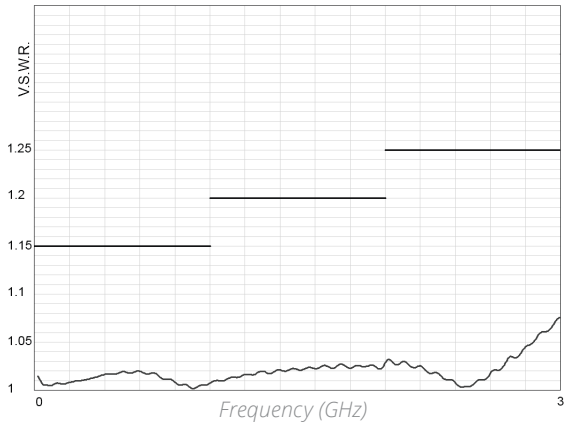


TYPICAL OUTLINE DRAWING

WITH SOLDER PINS & BRACKET

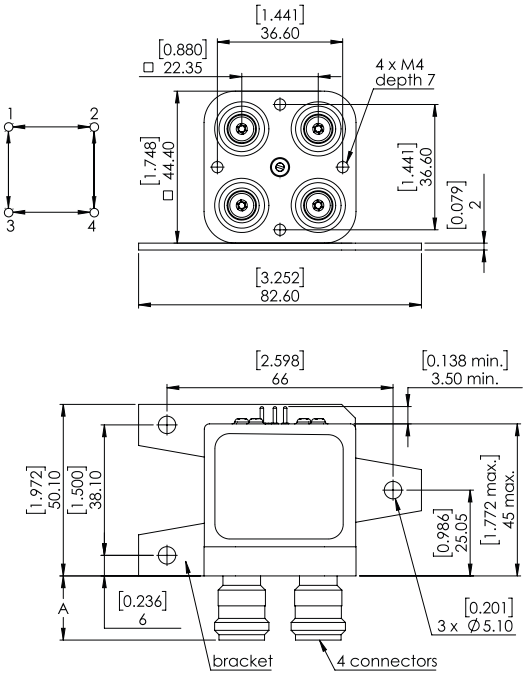


WITH D-SUB CONNECTOR & BRACKET

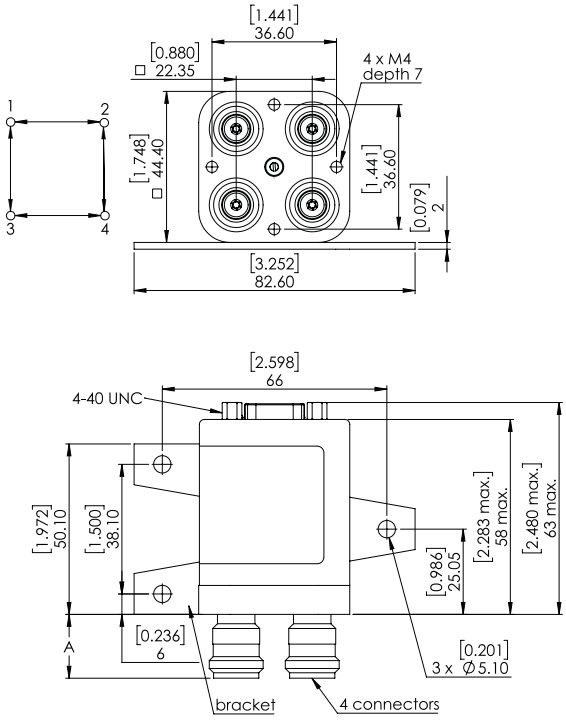

CONNECTORS	N	BNC	TNC
A max (mm [inches])	19.5 [0.748]	12.5 [0.472]	12.5 [0.472]

ACCESSORIES

A printed circuit board interface connector (ordered separately) has been designed for easy mounting on terminals.
For DPDT model R577 series = Radiall part number: R599 910 000

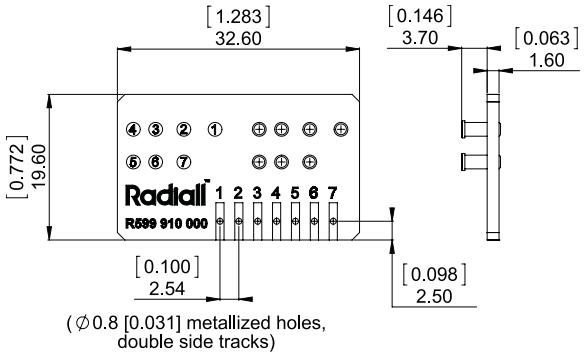



Notes

All dimensions are in millimeters [inches].
See page 4-13 for pin allocation.


Electrical Schematics

COAXIAL DPDT


R577 SERIES

FAILSAFE


WITHOUT OPTION
R577-1-000

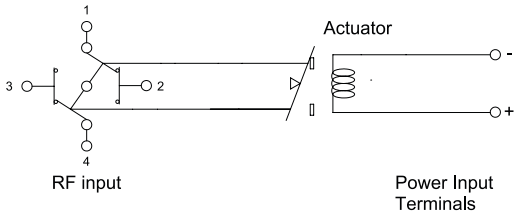


WITH INDICATOR CONTACT
R577-2-000

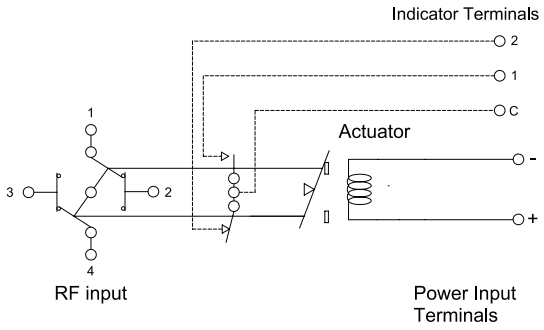


WITH SUPPRESSION DIODES
R577-1-030

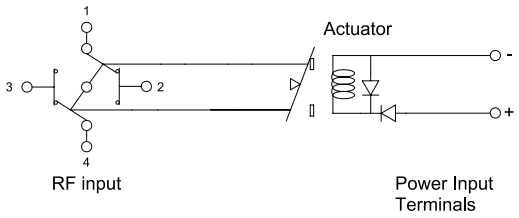


WITH SUPPRESSION DIODES & INDICATOR CONTACT
R577-2-030

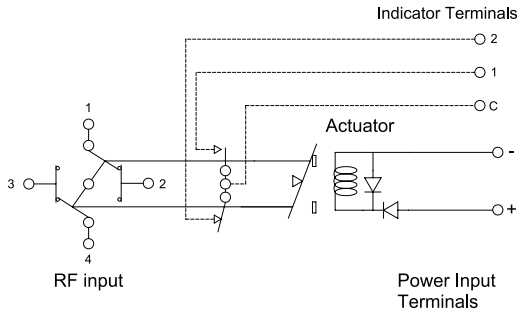

WITH TTL DRIVER (SUPPRESSION DIODES ARE INCLUDED)
R577-1-100

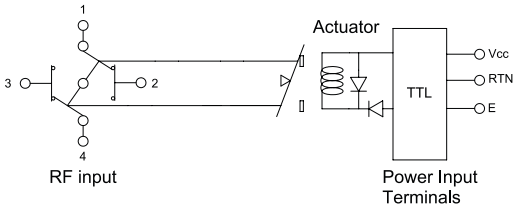

WITH TTL DRIVER & INDICATOR CONTACT (SUPPRESSION DIODES ARE INCLUDED)
R577-2-100

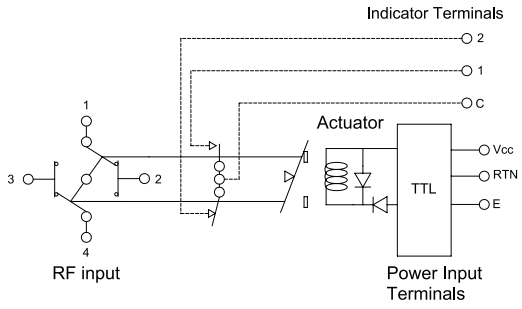


Electrical Schematics

COAXIAL DPDT


R577 SERIES

LATCHING


WITHOUT OPTION
R577-3-000

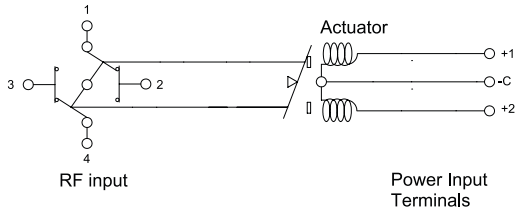


WITH INDICATOR CONTACT
R577-4-000

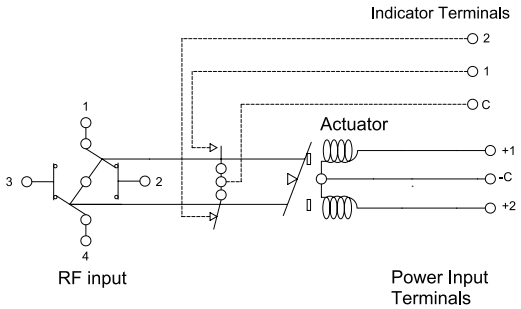


WITH SUPPRESSION DIODES
R577-3-030

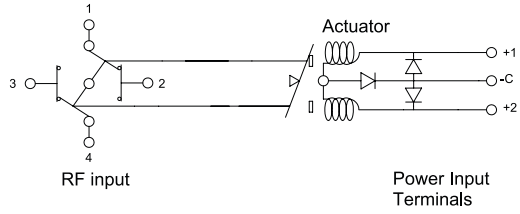


WITH SUPPRESSION DIODES & INDICATOR CONTACT
R577-4-030

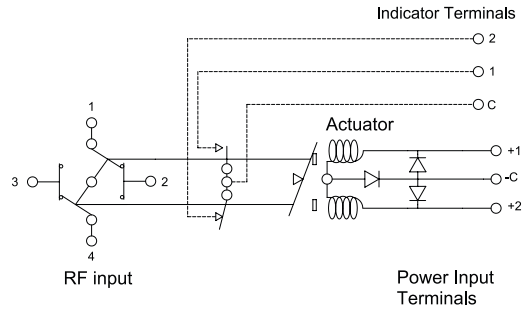

WITH TTL DRIVER (SUPPRESSION DIODES ARE INCLUDED)
R577-3-100

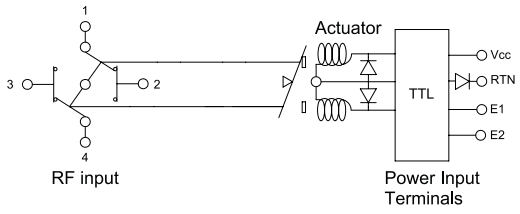

WITH TTL DRIVER & INDICATOR CONTACT (SUPPRESSION DIODES ARE INCLUDED)
R577-4-100

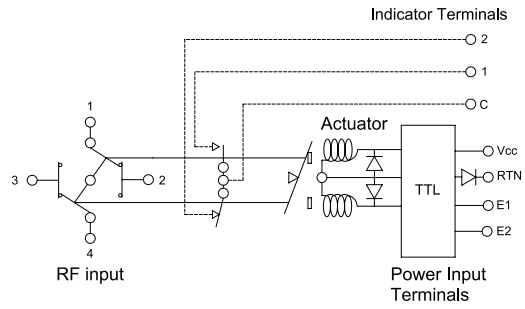


Electrical Schematics

COAXIAL DPDT (CONTINUED)


R577 SERIES

LATCHING


WITH CUT-OFF (SUPPRESSION DIODES ARE INCLUDED)
R577-5-000

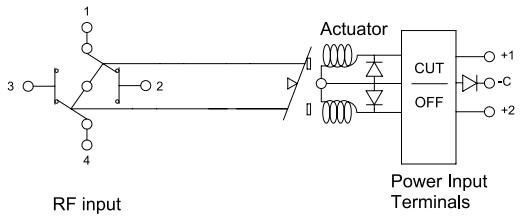


WITH CUT-OFF & INDICATOR CONTACT (SUPPRESSION DIODES ARE INCLUDED)
R577-6-000

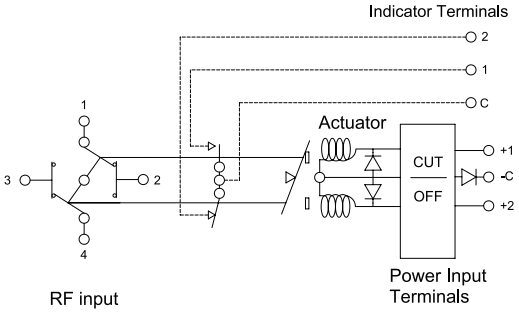


WITH CUT-OFF & TTL DRIVER
R577-5-100

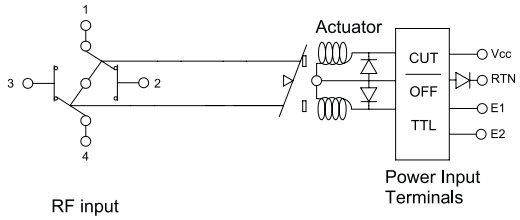


WITH CUT-OFF & INDICATOR CONTACT (SUPPRESSION DIODES ARE INCLUDED)
R577-6-100

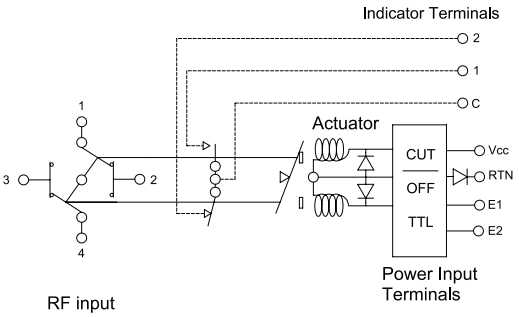

WITH POSITIVE COMMON, NO OPTION
R577-3-010

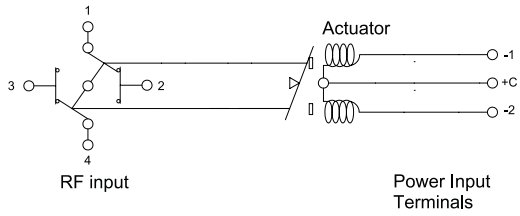

WITH POSITIVE COMMON & INDICATOR CONTACT
R577-4-010

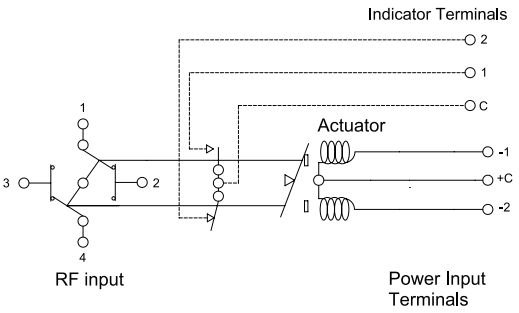


Electrical Schematics

COAXIAL DPDT (CONTINUED)


R577 SERIES

LATCHING


WITH POSITIVE COMMON & SUPPRESSION DIODES
R577-3-040

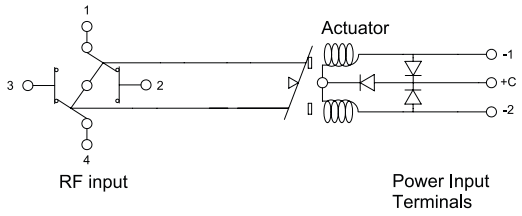


WITH POSITIVE COMMON, SUPPRESSION DIODES & INDICATOR CONTACT
R577-4-040

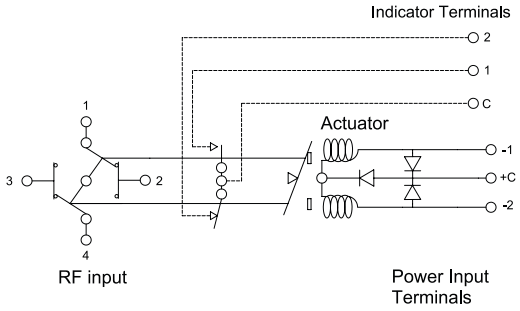

WITH POSITIVE COMMON & CUT-OFF (SUPPRESSION DIODES ARE INCLUDED)
R577-5-010

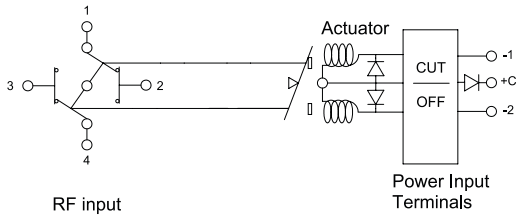


WITH POSITIVE COMMON, CUT-OFF & INDICATOR CONTACT (SUPPRESSION DIODES ARE INCLUDED)
R577-6-010

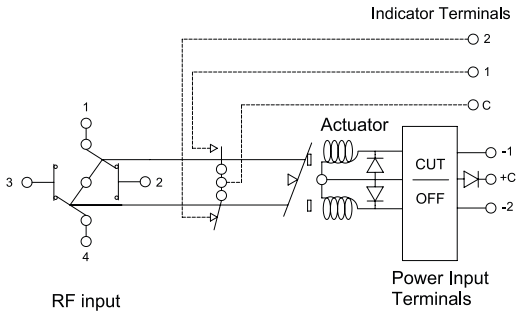

PIN IDENTIFICATION

TYPE	PIN						
	1	2	3	4	6	7	8
Failsafe	+		–				
Failsafe + I.C.	+		–		1	2	C
Failsafe + TTL	E		RTN	VCC			
Failsafe + I.C. + TTL	E		RTN	VCC	1	2	C
Latching Latching + Cut-off	-1 or +1	-2 or +2	+C or -C				
Latching + I.C. Latching + I.C. + Cut-off	-1 or +1	-2 or +2	+C or -C		1	2	C
Latching + Cut-off Latching + Cut-off + I.C.	E2	E1	RTN	VCC			
Latching + TTL + I.C.	E2	E1	RTN	VCC	1	2	C

Top View

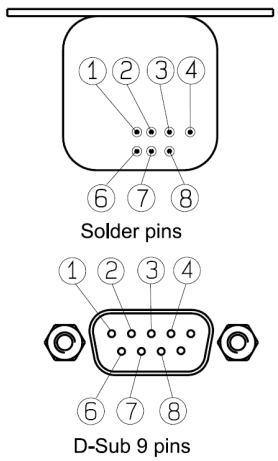

Titanium Series

HIGH PERFORMANCE DPDT

DPDT UP TO 40 GHz



Radiall's TITANIUM series switches are optimized to perform at a high level over an extended life cycle. With outstanding RF performance, and a guaranteed insertion loss repeatability of 0.03 dB over a life span of 2.5 million switching cycles. Radiall's TITANIUM switches are perfect for automated test and measurement equipment, as well as signal monitoring devices.

Example of P/N: R513473148 is a DPDT SMA 20 GHz, latching, Self Cut-Off, diodes, positive common, TTL driver, Indicators, HE10 receptacle with bracket.

PART NUMBER SELECTION

R513

SERIES PREFIX

RF CONNECTORS
3: SMA up to 6 GHz
4: SMA up to 20 GHz
F: SMA up to 26.5 GHz
8: SMA 2.9 up to 40 GHz [2]

TYPE
7: Latching + Self cut-off + Indicators

ACTUATOR VOLTAGE
3: 24 Vdc

TTL OPTION
1: With TTL driver

OPTIONS
4: With suppression diodes and positive common

ACTUATOR TERMINALS & FIXING
8: HE 10 receptacle with bracket [1]
9: HE 10 receptacle without bracket [1]

DOCUMENTATION
-: Certificate of conformity
C: Calibration certificate
R: Calibration certificate + RF curves

Notes
1. Delivered wlth 750 mm (30 inches) ribbon cable + HE10 connector.
2. Connector SMA 2.9 is equivalent to "K connector®" registered trademark of Anritsu.

Titanium Series

GENERAL SPECIFICATIONS

OPERATING MODE		LATCHING	
Nominal operating voltage (across operating temperature)	Vdc	24 (20/32)	
Coil resistance (+/-10%)	Ω	120	
Nominal operating current at 23 °C	mA	200	
Maximum stand-by current	mA	50	
Average power		RF path Cold switching: see RF Power Rating Chart on page 4-19 Hot switching: 1 Watt CW	
TTL input	High Level	3 to 7 V	1.4 mA max at 7 V
	Low Level	0 to 0.8 Volts	-
Indicator specifications		Maximum withstanding voltage	60 V
		Maximum current capacity	150 mA
		Maximum "ON" resistance	2.5 Ω
		Minimum "OFF" resistance	100 MΩ
Switching time (max)	ms	15	
Life		2.5 million cycles	
Connectors		SMA - SMA 2.9	
Actuator terminals		HE10 ribbon receptacle	
Weight (Max)	g	110	

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range	-25 °C to +75 °C
Storage temperature range	-55 °C to +85 °C
Temperature cycling (MIL-STD-202, Method 107D, Cond.A)	-55 °C to +85 °C (10 cycles)
Vibration (MIL STD 202, Method 204D, Cond.D) operating	10 - 2000 Hz, 10 g
Shock (MIL STD 202, Method 213B, Cond.C) operating	50 g / 6 ms, 1/2 sine
Moisture resistance (MIL STD 202, Method 106E, Cond.E)	65 °C, 95% RH, 10 days
Altitude storage (MIL STD 202, Method 105C, Cond.B)	50000 ft (15240 meters)
RFI (MIL STD 1344, Method 3008 or IEC 61726)	40 dB at 20 GHz


Titanium Series

RF PERFORMANCE


PART NUMBER		R51337314-	R51347314-		R513F7314-		R51387314-	
Frequency Range	GHz	DC to 6	DC to 20		DC to 26.5		DC to 40	
Impedance	Ω	50						
Insertion Loss (max)	dB	0.2 + 0.025 × frequency (GHz)						
Isolation (min)	dB	80	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz	80 70 65	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz	80 70 65 60	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz 26.5 to 40 GHz	80 70 65 60 55
V.S.W.R. (max)		1.20	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz	1.20 1.25 1.40	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz	1.20 1.25 1.40 1.65	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz 26.5 to 40 GHz	1.20 1.25 1.40 1.65 1.70
Repeatability (at 25 °C)		0.03 dB					0.05 dB	

TYPICAL RF PERFORMANCE

INSERTION LOSS & ISOLATION

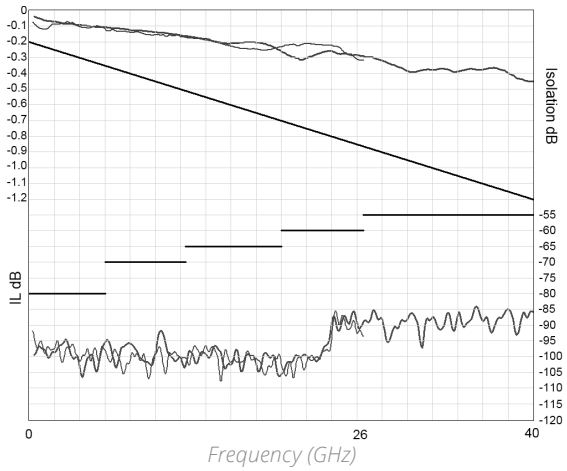


V.S.W.R

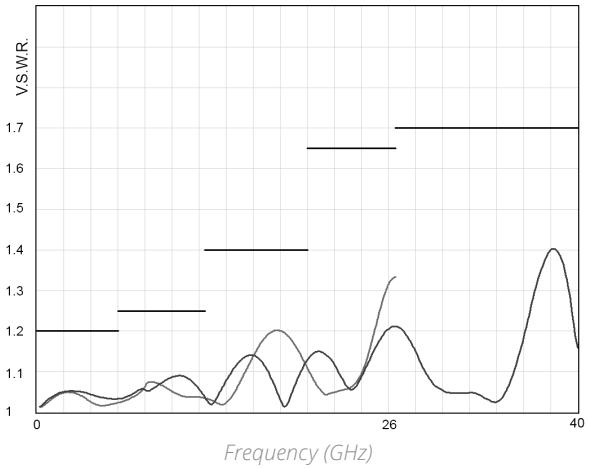

SMA —— **SMA 2.9** ——

DRIVING THE SWITCH


Transfer switches are configured with two positions. Each RF path can be closed by applying ground or TTL "High" to the corresponding "driver " pin.

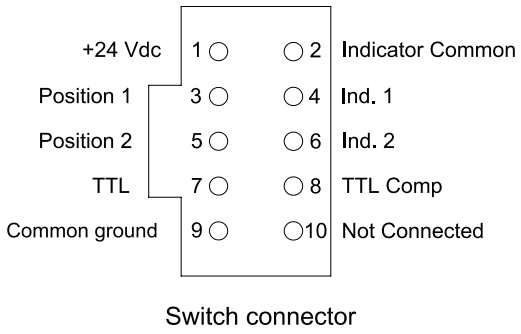

Switch connector

Standard Drive

- Connect pin 9 to ground (See note)
- Connect pin 1 to supply (+20 VDC to +32 VDC)
- Select (close) desired RF paths by applying ground to the corresponding "drive" pin (Ex: apply ground to pin 3 to close RF path 1-2 and 3-4)
- To select the second path, ensure that the unwanted RF path "drive" pin is disconnected from ground. Apply ground to the "drive" pin which corresponds to the desired RF paths (Ex: apply ground to pin 5 to close RF path 1-3 and 2-4)

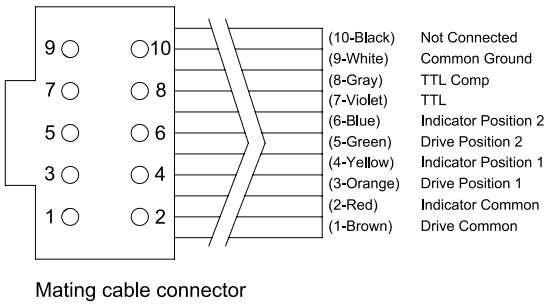


Mating cable connector

TTL Drive (Dual line)

- Connect pin 9 to ground
- Connect pin 1 to supply (+20 VDC to +32 VDC)
- Select (close) desired RF path by applying TTL "High" to the corresponding "drive" pin (Ex: apply TTL "High" to pin 7 and TTL “Low” to pin 8 to close RF paths position 1)
- To select the second path, ensure that the unwanted RF path "drive" pins are in TTL "Low" position. Apply TTL "High" to the "drive" pin which correspond to the desired RF path and TTL "low" to the undesired. (Ex: apply TTL "High" to pin 8 and TTL "Low" to pin 7 to close RF paths position 2)

RF SCHEMATIC DIAGRAM

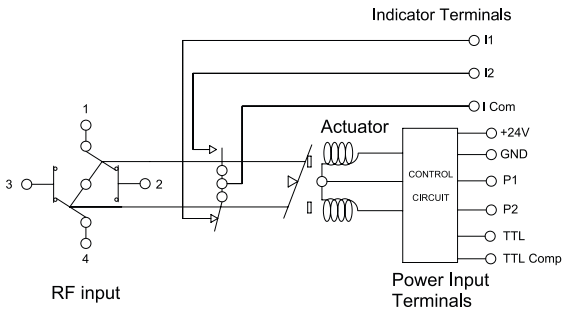

TTL Drive (Single line)


- Connect pin 9 to ground
- Connect pin 1 to supply (+20 VDC to +32 VDC)
- Connect pin 8 to TTL "High"
- Select (close) position 1 by applying TTL "High" to pin 7 (Ex: apply TTL "High" to pin 7 to close RF paths 1-2 and 3-4)
- Select position 2 by applying TTL "Low" to pin 7 (Ex: apply TTL "Low" to pin 7 to close RF paths 1-3 and 2-4)

	RF CONTINUITY	INDICATOR
Position 1	1-2 / 3-4	ICom – I1
Position 2	1-3 / 2-4	ICom – I2

Notes

Pin 9 does not need to be grounded for the switch to operate in standard drive. If pin 9 is not grounded, the position indicators will only function while the appropriate drive is applied. Therefore, if a pulse drive is used and continuous indicator operation is required, pin 9 must be grounded.


RF PERFORMANCE



Pin number	Function
2	Indicator Common
4	Indicator RF path 1
6	Indicator RF path 2

The electronic position indicators use photo-MOS transistors, which are driven by the mechanical position of the RF paths moving elements. The circuitry consists of a common which can be connected to an output corresponding to selected RF path. The photo-MOS transistors are configured for AC and/or DC operation. The electronic position indicators require the supply (20 to 32 VDC) to be connected to pin 1 and ground connected to pin 9.

TYPICAL OUTLINE DRAWING

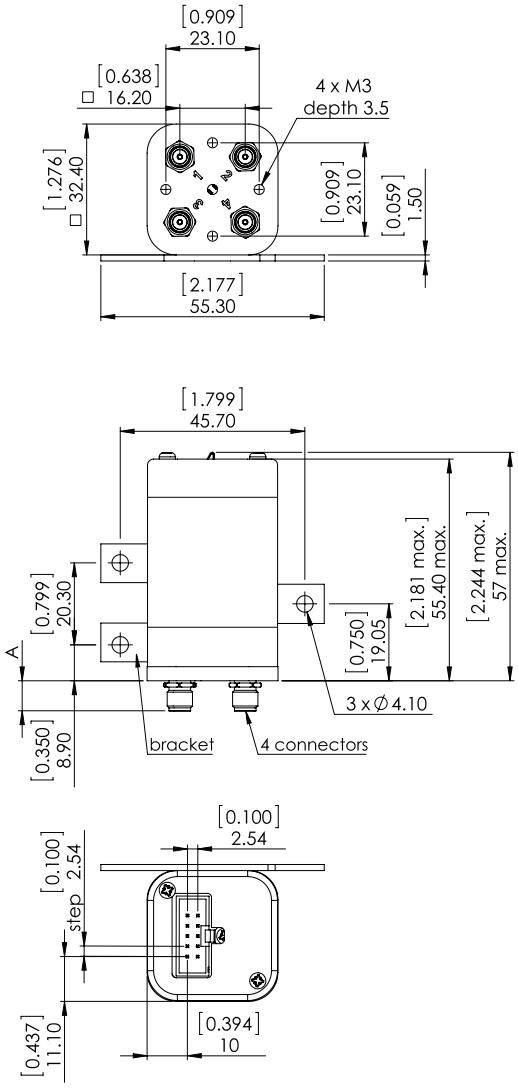

CONNECTORS	SMA	SMA 2.9
A max (mm [inches])	7.7 [0.303]	6.7 [0.264]


Notes

All dimensions are in millimeters [inches].


POWER RATING CHART

This graph is based on the following conditions:

- *Ambient temperature: +25 °C*
- *Sea level*
- *V.S.W.R.: 1 and cold switching*

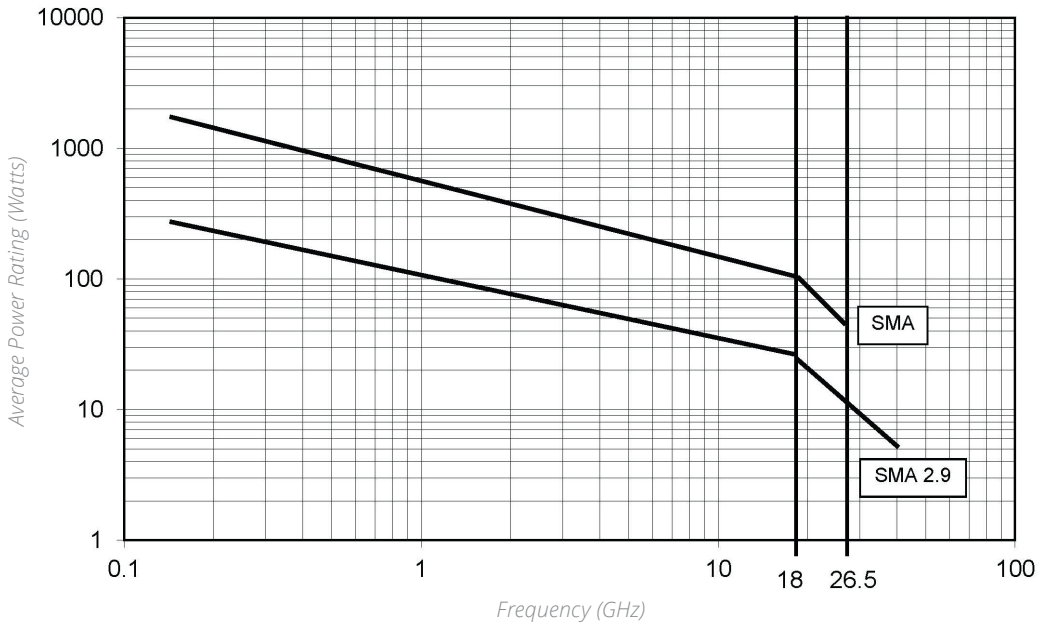

DERATING FACTOR VERSUS V.S.W.R.

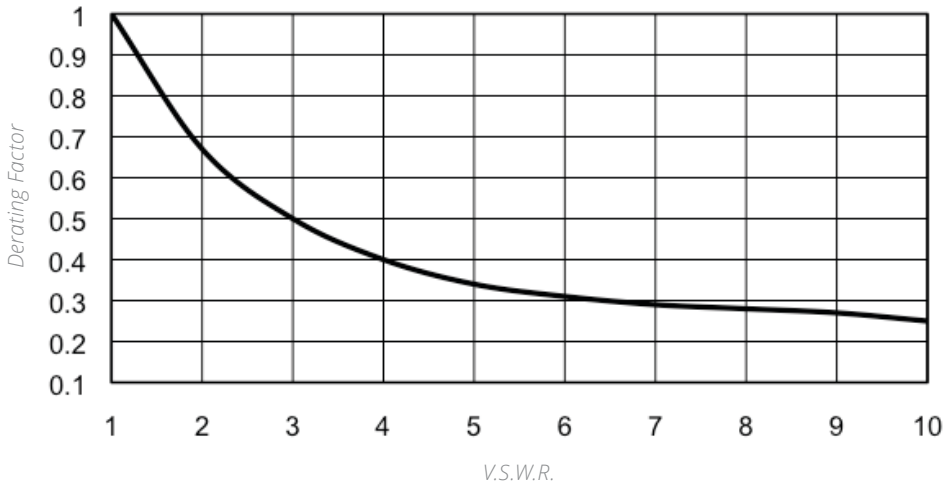

Platinum Series

HIGH PERFORMANCE DPDT

DPDT UP TO 40 GHz



Radiall's PLATINUM series switches are optimized to perform at a high level over an extended life cycle. With outstanding RF performance, and a guaranteed insertion loss repeatability of 0.03 dB over a life span of 10 million switching cycles. PLATINUM series switches are perfect for automated test and measurement equipment, as well as signal monitoring devices.

Example of P/N: R593F73148 is a DPDT SMA 26.5 GHz, latching, Self Cut-Off, diodes, positive common, TTL driver, Indicators, HE10 receptacle with bracket.

PART NUMBER SELECTION

R593

SERIES PREFIX

RF CONNECTORS
3: SMA up to 6 GHz
4: SMA up to 20 GHz
F: SMA up to 26.5 GHz
8: SMA 2.9 up to 40 GHz [2]

TYPE
7: Latching + Self cut-off + Indicators

ACTUATOR VOLTAGE
3: 24 Vdc

TTL OPTION
1: With TTL driver

OPTIONS
4: With suppression diodes and positive common

ACTUATOR TERMINALS AND FIXING
8: HE 10 receptacle with bracket [1]
9: HE 10 receptacle without bracket [1]

DOCUMENTATION
-: Certificate of conformity
C: Calibration certificate
R: Calibration certificate + RF curves

Notes
1. Delivered wlth 750 mm (30 inches) ribbon cable + HE10 connector.
2. Connector SMA 2.9 is equivalent to "K connector®" registered trademark of Anritsu.

Platinum Series

GENERAL SPECIFICATIONS

OPERATING MODE		LATCHING	
Nominal operating voltage (across operating temperature)	Vdc	24 (20/32)	
Coil resistance (+/-10%)	Ω	120	
Nominal operating current at 23 °C	mA	200	
Maximum stand-by current	mA	50	
Average power		RF path Cold switching: see RF Power Rating Chart on page 4-25 Hot switching: 1 Watt CW	
TTl input	High Level	3 to 7 V	1.4 mA max at 7 V
	Low Level	0 to 0.8 Volts	-
Indicator specifications		Maximum withstanding voltage	60 V
		Maximum current capacity	150 mA
		Maximum "ON" resistance	2.5 Ω
		Minimum "OFF" resistance	100 MΩ
Switching time (max)	ms	15	
Life	SMA	10 million cycles	
	SMA 2.9	5 million cycles	
Connectors		SMA - SMA 2.9	
Actuator terminals		HE10 ribbon receptacle	
Weight (Max)	g	110	

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range	-25 °C to +75 °C
Storage temperature range	-55 °C to +85 °C
Temperature cycling (MIL-STD-202, Method 107D, Cond.A)	-55 °C to +85 °C (10 cycles)
Vibration (MIL STD 202, Method 204D, Cond.D) operating	10 - 2000 Hz, 10 g
Shock (MIL STD 202, Method 213B, Cond.C) operating	50 g / 6 ms, 1/2 sine
Moisture resistance (MIL STD 202, Method 106E, Cond.E)	65 °C, 95% RH, 10 days
Altitude storage (MIL STD 202, Method 105C, Cond.B)	50000 ft (15240 meters)
RFI (MIL STD 1344, Method 3008 or IEC 61726)	40 dB at 20 GHz


Platinum Series

RF PERFORMANCE


PART NUMBER		R59337314-	R59347314-		R593F7314-		R59387314-	
Frequency Range	GHz	DC to 6	DC to 20		DC to 26.5		DC to 40	
Impedance	Ω	50						
Insertion Loss (max)	dB	0.2 + 0.025 × frequency (GHz)						
Isolation (min)	dB	100	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz	100 90 80	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz	100 90 80 65	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz 26.5 to 40 GHz	100 90 80 65 60
V.S.W.R. (max)		1.20	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz	1.20 1.25 1.40	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz	1.20 1.25 1.40 1.65	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz 26.5 to 40 GHz	1.20 1.25 1.40 1.65 1.70
Repeatability (at 25 °C)		0.03 dB					0.05 dB	

TYPICAL RF PERFORMANCE

INSERTION LOSS & ISOLATION

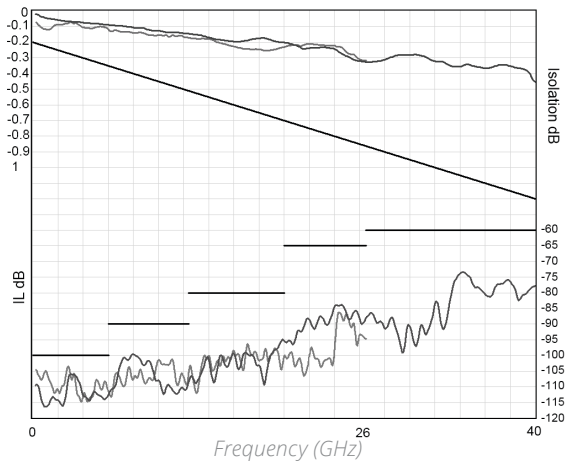


V.S.W.R

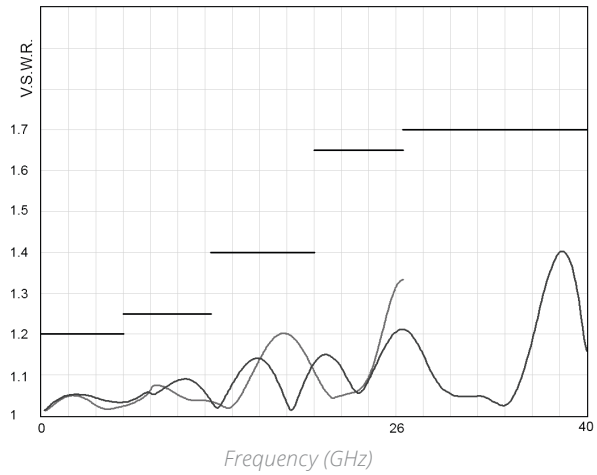

SMA —— **SMA 2.9** ——

DRIVING THE SWITCH


Transfer switches are configured with two positions. Each RF path can be closed by applying Ground or TTL "High" to the corresponding "driver " pin.

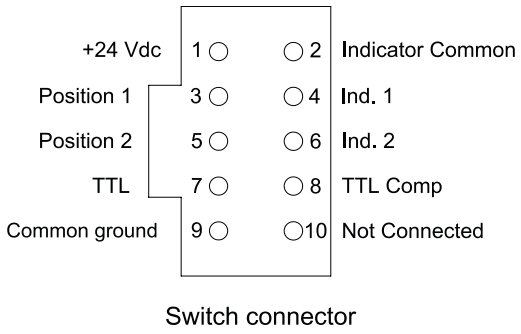

Switch connector

Standard Drive

- Connect pin 9 to ground (See note)
- Connect pin 1 to supply (+20 VDC to +32 VDC)
- Select (close) desired RF paths by applying ground to the corresponding "drive" pin (Ex: apply ground to pin 3 to close RF path 1-2 and 3-4)
- To select the second path, ensure that the unwanted RF path "drive" pin is disconnected from ground. Apply ground to the "drive" pin which corresponds to the desired RF paths (Ex: apply ground to pin 5 to close RF path 1-3 and 2-4)

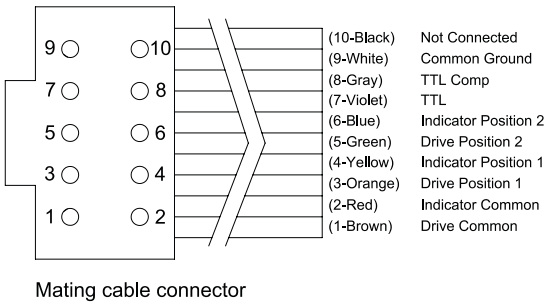


Mating cable connector

TTL Drive (Dual line)

- Connect pin 9 to ground
- Connect pin 1 to supply (+20 VDC to +32 VDC).
- Select (close) desired RF path by applying TTL "High" to the corresponding "drive" pin (Ex: apply TTL "High" to pin 7 and TTL “Low” to pin 8 to close RF paths position 1)
- To select the second path, ensure that the unwanted RF path "drive" pins are in TTL "Low" position. Apply TTL "High" to the "drive" pin which corresponds to the desired RF path and TTL "low" to the undesired (Ex: apply TTL "High" to pin 8 and TTL "Low" to pin 7 to close RF paths position 2)

RF SCHEMATIC DIAGRAM

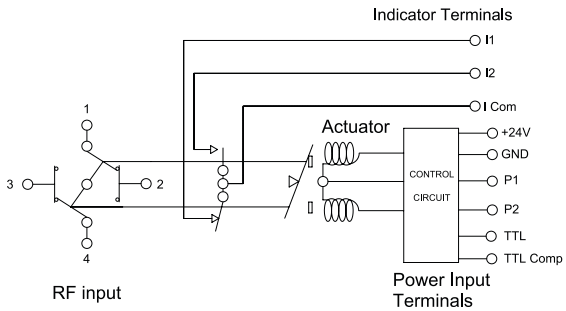

TTL Drive (Single line)


- Connect pin 9 to ground
- Connect pin 1 to supply (+20 VDC to +32 VDC)
- Connect pin 8 to TTL "High"
- Select (close) position 1 by applying TTL "High" to pin 7 (Ex: apply TTL "High" to pin 7 to close RF paths 1-2 and 3-4)
- Select position 2 by applying TTL "Low" to pin 7 (Ex: apply TTL "Low" to pin 7 to close RF paths 1-3 and 2-4)

	RF CONTINUITY	INDICATOR
Position 1	1-2 / 3-4	ICom – I1
Position 2	1-3 / 2-4	ICom – I2

Notes

Pin 9 does not need to be grounded for the switch to operate in standard drive. If pin 9 is not grounded, the position indicators will only function while the appropriate drive is applied. Therefore, if a pulse drive is used and continuous indicator operation is required, pin 9 must be grounded.

RF PERFORMANCE




Pin number	Function
2	Indicator Common
4	Indicator RF path 1
6	Indicator RF path 2

The electronic position indicators use photo-MOS transistors, which are driven by the mechanical position of the RF paths moving elements. The circuitry consists of a common which can be connected to an output corresponding to selected RF path. The photo-MOS transistors are configured for AC and/or DC operation.

The electronic position indicators require the supply (20 to 32 VDC) to be connected to pin 1 and ground connected to pin 9.

TYPICAL OUTLINE DRAWING

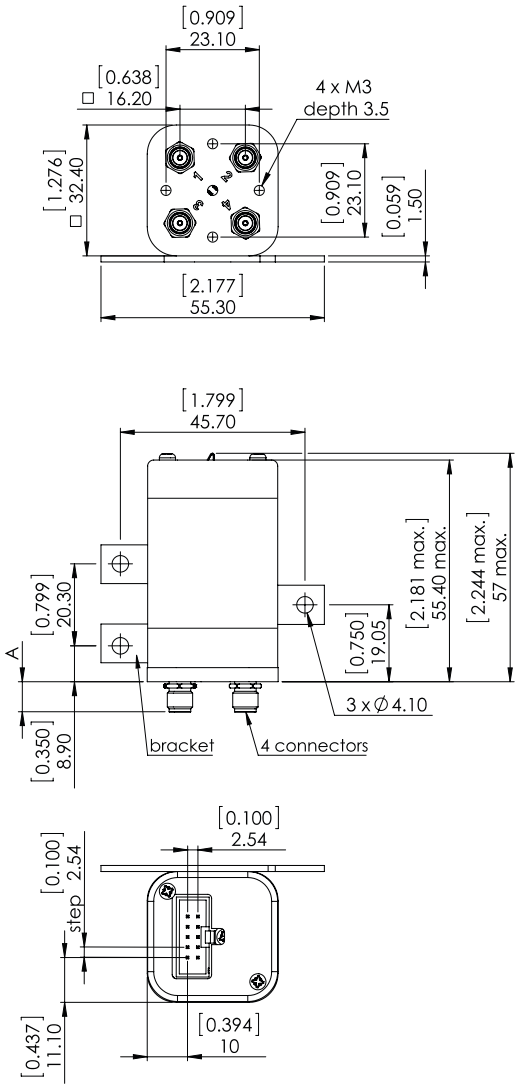

CONNECTORS	SMA	SMA2.9
A max (mm [inches])	7.7 [0.303]	6.7 [0.264]


Notes

All dimensions are in millimeters [inches].


POWER RATING CHART

This graph is based on the following conditions:

- *Ambient temperature: +25 °C*
- *Sea level*
- *V.S.W.R.: 1 and cold switching*

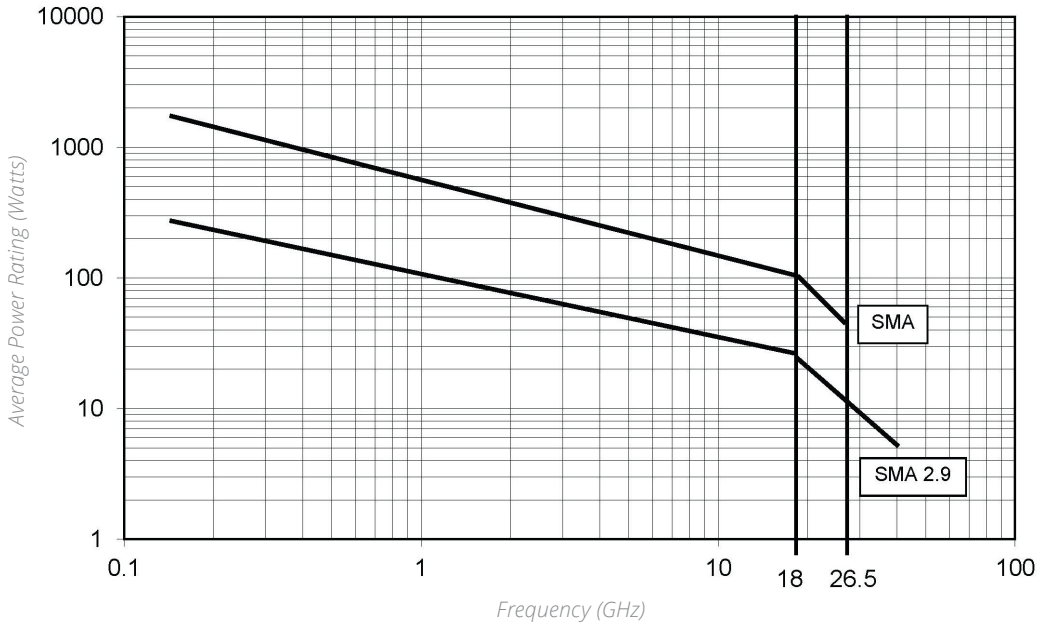


DERATING FACTOR VERSUS V.S.W.R.

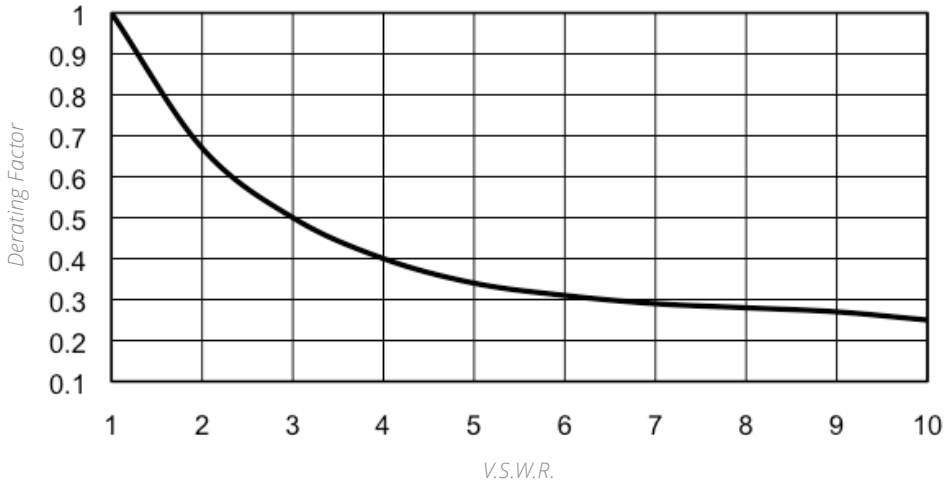

OPTIONAL FEATURES FOR DPDT SWITCHES

GENERAL


A microwave circuit or component can be inserted into a transmission line by using a DPDT switch as a bypass product. In event that the short-circuit of the microwave circuit or component is undesirable, the J1/J3 path can be left out (see application option below).

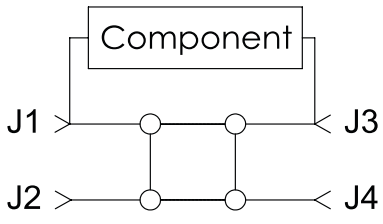


EXAMPLES OF DEDICATED APPLICATION OPTIONS



This DPDT with a cable load is used for redundancy purposes for 2 amplifiers, one working, the other one in stand-by.







This true Bypass Switch is based on a DPDT with only 3 RF ways instead of 4.

- Component inserted in J2/J4
- POS 1: J1 to J3: Direct line
- POS 2: J1 to J3: Component line



This DPDT has been fitted with a specific bracket to fulfill a specific customer request.



This DPDT was designed with a specific flat cable for an easy integration.


RADIALL
R594473617
0 - 20 GHz
Un : 24 V
SN : 08. XXX
RADIALL
R591702610
0 - 26.5 GHz
Un: 12V
Lot 1128

SPnT

Section 5 Table of Contents

SUBMINIATURE SERIES
SPnT up to 40 GHz: R591 Series ..... 5-2 to 5-4
R591 Series Electrical Schematics.....5-5 to 5-7

USB SERIES
SPnT USB up to 40 GHz: R57xxxxx01 Series
(Terminated and Non-Terminated).....5-8 to 5-13

RAMSES SERIES
SPnT up to 67 GHz: R57x & R52x Series
(Terminated and Non-Terminated).....5-14 to 5-24
SP8 to 12T up to 40 GHz: R523 & R524 Series
(Terminated and Non-Terminated)..... 5-25 to 5-32
SPnT up to 12.4 GHz: R57x Series
(N, BNC and TNC models) .....5-33 to 5-40
RF Connector Allocation for SPnT Series .....5-41 to 5-42

ACCESSORIES SPnT & ELECTRICAL SCHEMATICS
Coaxial SPnT - Accessories.....5-43 to 5-46
Coaxial SPnT - Electrical Schematics.....5-47 to 5-52

TITANIUM SERIES
High Performance Multiport Switches
SPnT up to 40GHz: R51x Series..... 5-53 to 5-59

PLATINUM SERIES
High Performance Multiport Switches - SPnT Terminated
Up to 40 GHz: R594 Series .....5-60 to 5-67

OPTIONAL FEATURES
Optional Features 5-68

SPnT PART NUMBER SELECTION GUIDE [1]

DIGITAL POSITION		R 1-3/ MODEL:				4: RF CONNECTORS																5: TYPE		6: VOLTAGE				7: POS.	8: OPTIONS					9: TERMINALS				10: DOCUMENT-ATION		
Series		-				SMA 6 GHz	SMA 18 GHz	SMA 20 GHz	SMA 22 GHz	SMA 26.5 GHz	SMA 2.9 40 GHz	2.4mm 50 GHz	QMA 6 GHz	DIN 1.6/5.6/2.5 GHz	N 3 GHz	N 12.4 GHz	BNC 3 GHz	TNC 3 GHz	TNC 12.4 GHz			Normally open	Latching	5 V	12 V	24 V	28 V	Number of positions	Without option	Positive common	TTL driver	Suppression diodes	Positive common and suppression diodes	BCD TTL driver compatible	Solder pins	D-Sub connector	Mini USB	Micro-D connector	HE 10 receptacle	Certificate of conformity	Calibration certificate	Calibration certificate + RF curves
Configuration		-	Not terminated	Terminated		-	-	-	-	-	-	-	-	-	-	-	-	-	-			-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
PLATINUM	TITANIUM	SUBMIN.			USB															RAMSES																					
SPnT	SPnT	SPnT			SPnT															SPnT																				
R594	R51	R591	R57	R52	R57															R57	R52																				
-	2	-	3	3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0	1	-	2	-	-	4/6	0	-	-	-	-	0	-	-	-	-	-	-	-
-	4	-	4	4	4	-	-	-	-	-	-	-	-	0	-	-	-	-	-	0	1	1	-	-	2	-	-	6/8	0	-	1	-	-	-	-	-	1	-	-	-	-	-
3	3	3	-	3	3	3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2/3/4/5/8/9	-	-	2	-	2	8/10/12	0	1	1	2	3	4	8	0	5	-	-	-	-	-
-	-	-	-	4	4	-	4	-	-	F	8	J	J	9	-	-	-	-	-	-	-	2/3/4/5/8/9	-	-	2	-	3	3-6	0	1	1	2	3	4	8	0	5	-	-	-	-	-
4	4	-	-	4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4/6	-	1	1	2	-	-	-	-	-	-	-	-	-	-
-	-	-	-	H	-	-	-	-	-	F	8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
F	F	7	-	F	F	-	-	-	-	F	8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
8	8	8	-	8	8	-	-	-	-	8	8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	J	-	-	-	-	-	J	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	E	-	J	-	-	-	-	-	J	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	0/1	0/1	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Normally open	Latching	5 V	12 V	24 V	28 V	Number of positions	Without option	Positive common	TTL driver	Suppression diodes	Positive common and suppression diodes	BCD TTL driver compatible	Solder pins	D-Sub connector	Mini USB	Micro-D connector	HE 10 receptacle	Certificate of conformity	Calibration certificate	Calibration certificate + RF curves
4/7	7	2/6	2/3/4/5/8/9	2/3/4/5/8/9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	2	-	2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3	3	-	-	2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	3	-	3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
4/6	4/6	-	3-6	3-6	6/8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4/6	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	0	0	0	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0	-	-	-	-	-	-	-	-	-	-	-	-	-
1	1	1	1	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-
2	2	2	2	2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	3	3	3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	4	4	4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	8	8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	0	0	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	5	5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	5	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
7	7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
C	C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
R	R	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Notes

Example of P/N: R591703400 is a SP4T SMA up to 26.5 GHz, normally open, 28 Vdc, without option, solder pins.
1. For part number creation and available options, see detailed part number selection for each series.

Subminiature Series

SUBMINIATURE SPnT UP TO 40 GHz

SMA – SMA 2.9 - QMA



Radiall's R591 coaxial subminiature switches have a typical operating life exceeding 25 million cycles; Providing excellent RF performance, repeatability, and a guaranteed life of 10 million cycles, which makes switches ideal for Automated Test Equipment (ATE) and other measurement applications. These subminiature switches are also an excellent choice for Mil/ Aero applications due to their small size, light weight, and outstanding shock and vibration handling capabilities.

Example of P/N: R591302420 is a SP4T SMA up to 6 GHz, normally open, 12 Vdc with TTL driver and solder pins.

PART NUMBER SELECTION

R591

SERIES PREFIX

RF CONNECTORS
3: SMA up to 6 GHz
7: SMA up to 26.5 GHz
8: SMA 2.9 up to 40 GHz [6]
E: QMA up to 6 GHz [5]

TYPE
0: Normally open
2: Latching, global reset
6: Latching, separated reset [1]

ACTUATOR VOLTAGE
2: 12 Vdc
3: 28 Vdc

NUMBER OF POSITIONS
4: 4 positions
6: 6 positions

OPTIONS
0: Without option
1: Positive common
2: With TTL driver [2, 3 & 4]
3: With suppression diodes
4: With suppression diodes and positive common

ACTUATOR TERMINALS
0: Solder pins
5: Micro-D connector

Notes

1. Available with "solder pins" models only.
2. Polarity is not relevant to application for switches with TTL driver.
3. Suppression diodes are already included with TTL option.
4. Available with "normally open" models only.
5. The QLF tradermark (Quick Lock Formula®) standard applies to QMA and QN series and guaranties the full intermateability between suppliers using this tradermark. Using QLF certified connectors also guarantees the specified level of RF performance.
6. Connector SMA2.9 is equivalent to "K connector®", registered trademark of Anritsu.

Subminiature Series

GENERAL SPECIFICATIONS

OPERATING MODE		NORMALLY OPEN		LATCHING	
Nominal operating voltage (across operating temperature)	Vdc	12 (10.2 / 13)	28 (21 / 30)	12 (10.2 / 13)	28 (21 / 30)
Coil resistance (+/-10%)	Ω	48	250	60	285
Operating current at 23 °C	mA	250	110	200	98
Average power		See RF Power Rating Chart page 1-13			
TTL input	High Level	2.2 to 5.5 Volts		800 µA max 5.5 Volts	
	Low Level	0 to 0.8 Volts		20 µA max 0.8 Volts	
Switching time (max)	ms	10			
Life	SMA-QMA	10 million cycles			
	SMA 2.9	2 million cycles			
Connectors		SMA - QMA - SMA 2.9			
Actuator terminals		Solder Pins: double row connector for wrapping, soldering (250 °C max / 30 sec), or connecting to 2.54 mm pitch female connector. 9 pin micro-D receptacle M83513/07-A according to MIL-C-85513.			
Operating temperature range		-40 °C to +85 °C			
Storage temperature range		-55 °C to +85 °C			
Sine vibration (According to MIL STD 202, Method 204D, Cond. D)		10 - 2000 Hz, 20 g - operating			
Random vibration (According to MIL STD 202, Method 214A, Profile I, Cond. F)		50 - 2000 Hz, 20.71 g - operating			
Shock (According to MIL STD 202, Method 213B, Cond. C)		100 g / 6 ms, 1/2 sine - operating			

RF PERFORMANCE

CONNECTORS	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	IMPEDANCE Ω
QMA / SMA	DC - 6	DC - 3	1.20	0.20	80	50
		3 - 6	1.30	0.30	70	
SMA	DC - 26-5	DC - 3	1.20	0.20	80	
		3 - 8	1.30	0.30	70	
		8 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.60	0.60	55	
SMA 2.9	DC - 40	DC - 3	1.20	0.20	80	
		3 - 8	1.30	0.30	70	
		8 - 12.4	1.40	0.40	60	
		12. 4 - 18	1.50	0.50	60	
		18 - 26.5	1.70	0.70	55	
		26.5 - 40	2.20	1.10	45	


Notes

See page 5-4 for typical RF performance.


Subminiature Series

TYPICAL RF PERFORMANCE

INSERTION LOSS & ISOLATION

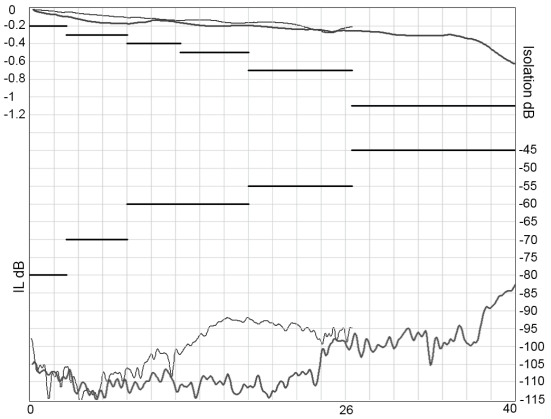


V.S.W.R

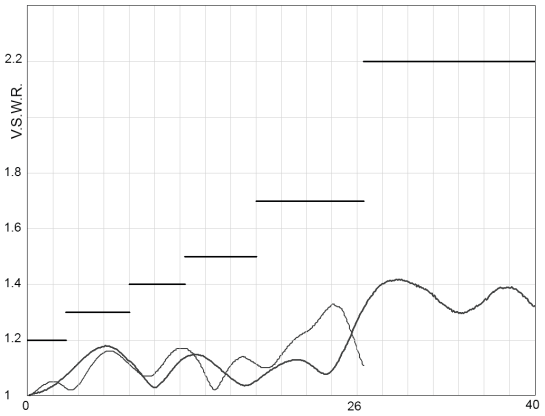


TYPICAL OUTLINE DRAWING [1]

SOLDER PIN MODEL

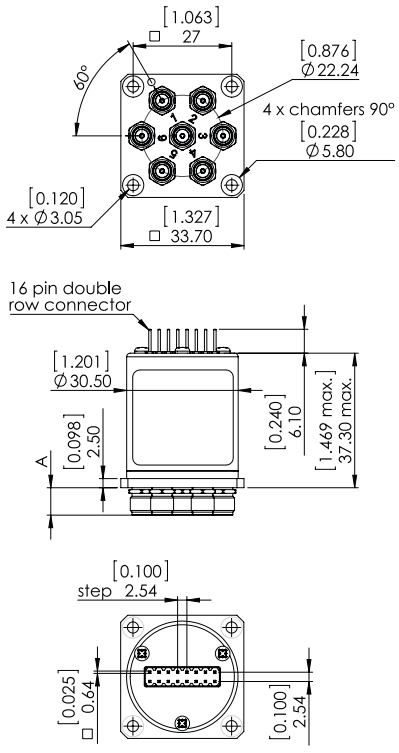

MICRO-D MODEL

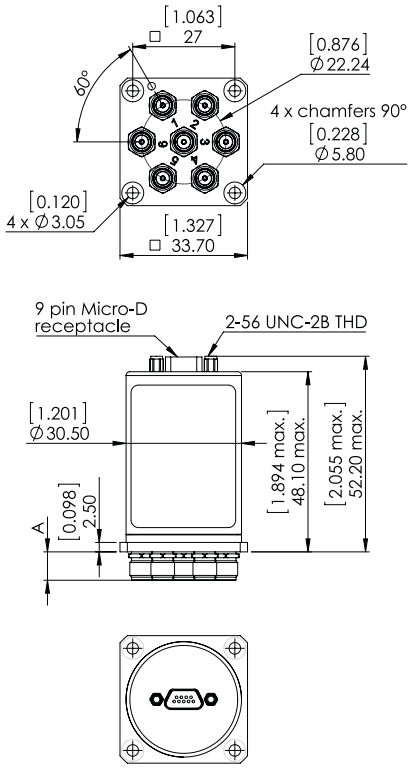


CONNECTORS	SMA	SMA 2.9	QMA
A max (mm/ [inches])	7.7 [0.303]	6.7 [0.264]	10.8 [0.394]

Notes


1. For SP4T, ways 3 and 6 not connected
2. All dimensions are in millimeters [inches].

R591 SERIES ELECTRICAL SCHEMATICS


NORMALLY OPEN WITHOUT OPTION
R591-0- -0-

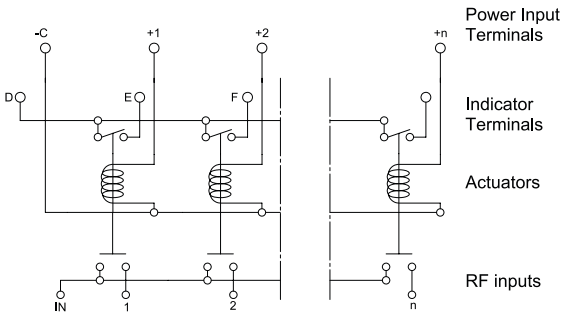


NORMALLY OPEN WITH POSITIVE COMMON
R591-0- -1-

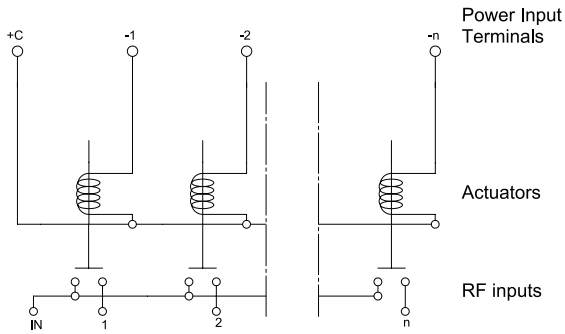


NORMALLY OPEN WITH TTL DRIVE
R591-0- -2-

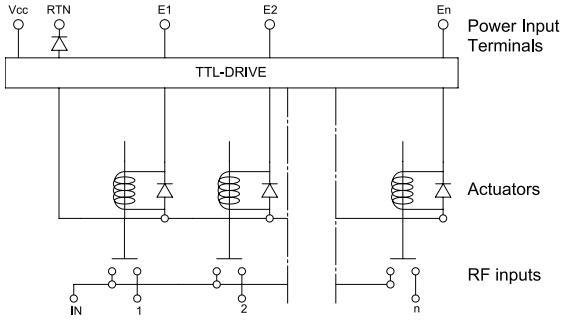


NORMALLY OPEN WITH SUPPRESSION DIODES
R591-0- -3-

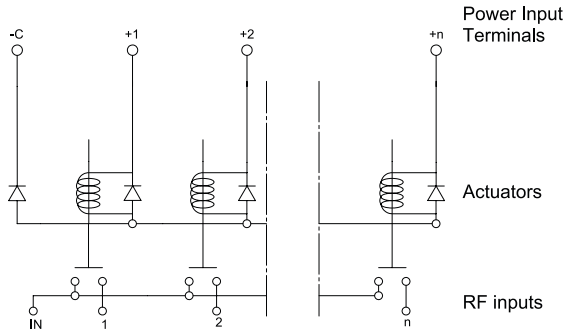


NORMALLY OPEN WITH POSITIVE COMMON & SUPPRESSION DIODES
R591-0- -4-

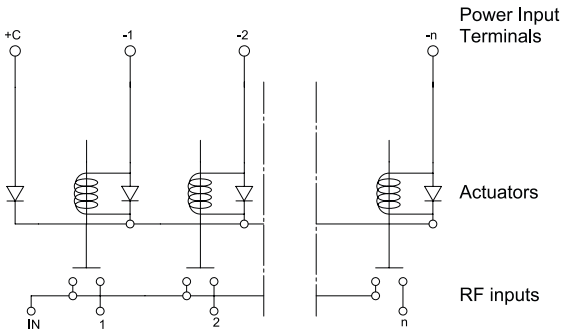


LATCHING GLOBAL RESET WITHOUT OPTION
R591-2- -0-

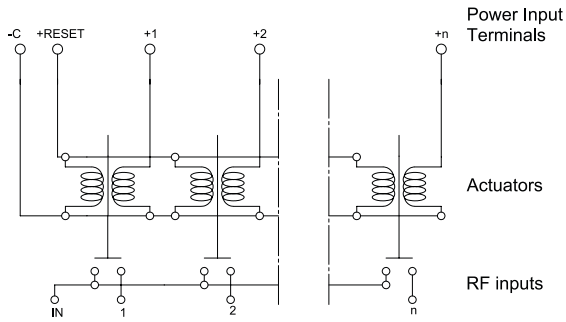


LATCHING GLOBAL RESET WITH POSITIVE COMMON
R591-2- -1-

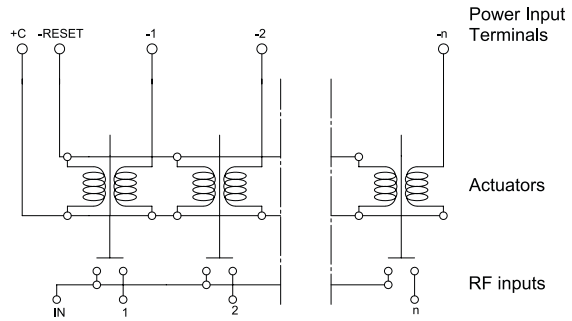


LATCHING GLOBAL RESET WITH SUPPRESSION DIODES
R591-2- -3-

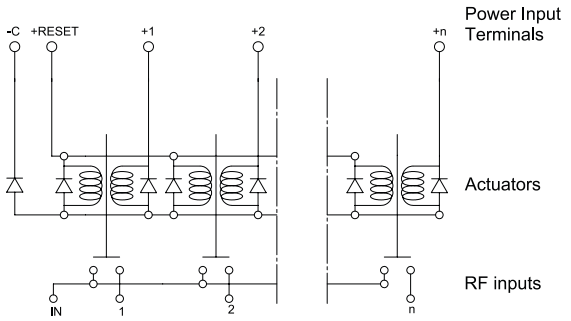


LATCHING GLOBAL RESET WITH POSITIVE COMMON & SUPPRESSION DIODES
R591-2- -4-

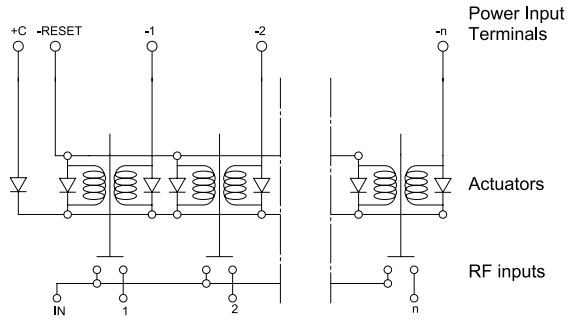


LATCHING SEPARATED RESET WITHOUT OPTION
R591-6- -0-

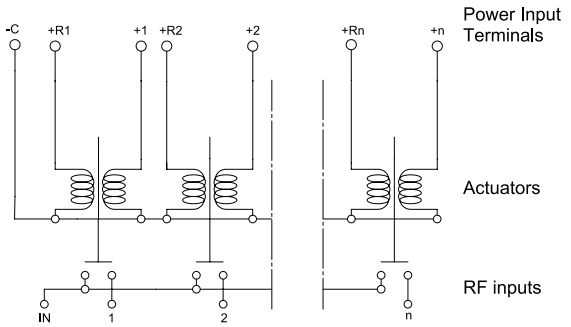


LATCHING SEPARATED RESET WITH POSITIVE COMMON
R591-6- -1-

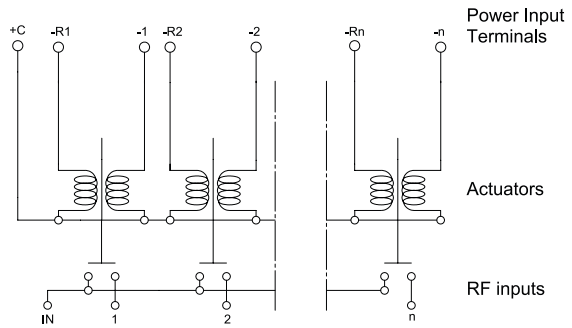

LATCHING SEPARATED RESET WITH SUPPRESSION DIODES
R591-6- -3-

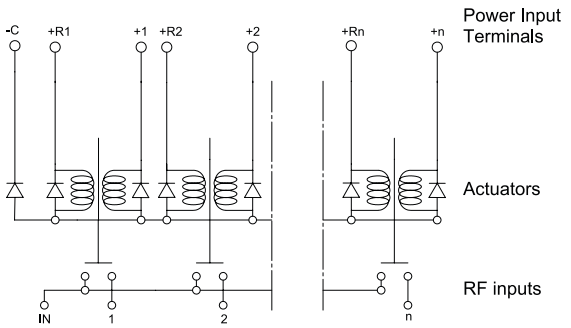


LATCHING SEPARATED RESET WITH POSITIVE COMMON & SUPPRESSION DIODES
R591-6- -4-

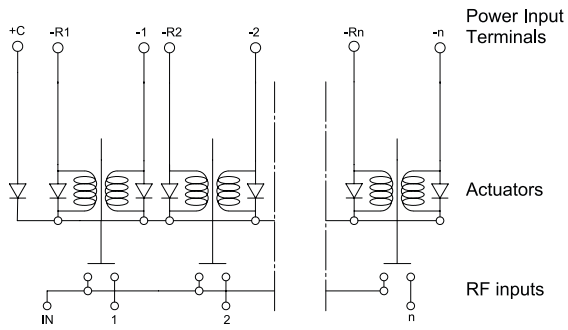


PIN IDENTIFICATION

SOLDER PINS (TOP VIEW) [1]

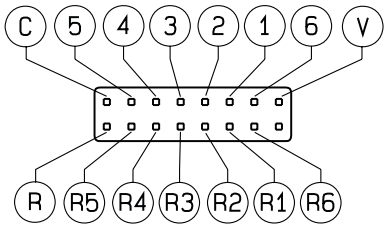

9 PIN MICRO-D (TOP VIEW)



- 16 contact female connector
- NC: not connected
- For SP4T, ways 3 and 6 not connected
- Pin R = reset of all paths

TYPE		C	V	1	2	3	4	5	6	R	R1	R2	R3	R4	R5	R6
Normally open	Negative common	-C	NC	+1	+2	+3	+4	+5	+6	NC	NC	NC	NC	NC	NC	NC
	Positive common	+C	NC	-1	-2	-3	-4	-5	-6	NC	NC	NC	NC	NC	NC	NC
Latching global reset	Negative common	-C	NC	+1	+2	+3	+4	+5	+6	+reset	NC	NC	NC	NC	NC	NC
	Positive common	+C	NC	-1	-2	-3	-4	-5	-6	-reset	NC	NC	NC	NC	NC	NC
Latching individual reset [2]	Negative common	-C	NC	+1	+2	+3	+4	+5	+6	NC	+res.1	+res.2	+res.3	+res.4	+res.5	+res.6
	Positive common	+C	NC	-1	-2	-3	-4	-5	-6	NC	-res.1	-res.2	-res.3	-res.4	-res.5	-res.6
Normally open with TTL drive	-	RTN	VCC	E1	E2	E3	E4	E5	E6	NC	NC	NC	NC	NC	NC	NC

Notes

1. Compatible with 2.54 mm pitch double row and HE10 connector.

2. Available with "solder pins" models only.

USB Series

SPnT USB UP TO 40 GHz

SMA – SMA 2.9



Utilizing Radiall's proven and patented RAMSES concept, our team of experts and engineers integrated a mini-USB terminal on SP6T and SP8T switches for simplified use especially in test & lab applications.

Featuring an easy-to-integrate design, USB Coaxial Switches are delivered with a 1 meter long USB cable for power supply and switch drive. A soft front panel is provided to control the switches but commonly used software programming platforms such as Visual Basic, C#, C++, LabVIEW, Python and VEE are also compatible.

Example of P/N: R573F11601 is a non-terminated SP6T SMA up to 26.5 GHz, Normally Open, 5 Vdc, Indicators with a mini USB port.

PART NUMBER SELECTION

R5 _ _ 1 1 _ 0 1

SERIES PREFIX
2: SP8T models
7: SP6T models

MODEL
3: Without 50 Ω termination
4: With 50 Ω termination

RF CONNECTORS
F: SMA up to 26.5 GHz
8: SMA 2.9 up to 40 GHz [1]

TYPE
1: Normally open I.C.

ACTUATOR VOLTAGE
1: 5 Vdc

NUMBER OF POSITIONS
6: 6 positions
8: 8 positions

OPTIONS
0: Without option

ACTUATOR TERMINALS
1: Mini USB socket

Notes
I.C.: Indicator contact
1. Connector SMA 2.9 is equivalent to "K connector®", registered trademark of Anritsu.

APPLICATION NOTE


USB coaxial switch as cascade

You can use as many USB switches in cascade as you want. Each product is recognized by its automatic affectation to the ComPort and in order to differentiate them, each product has its own serial number which can be read by the software.

In order to provide power supply (5 V / 420 mA) and drive as many switches as you want with your computer, you will need a hub USB which can provide same power as a classic USB port of the computer (500 mA / 5 V) or a PCI expansion card USB (if it is a desktop).

APPLICATION EXAMPLE

BEFORE

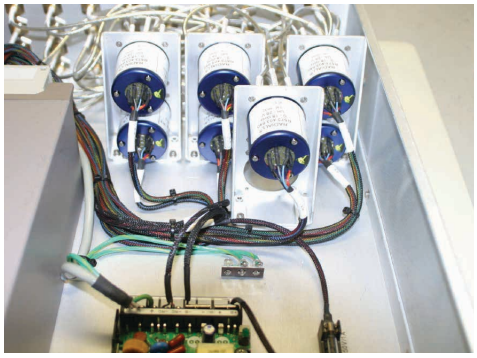


DC power from a power supply and wires to provide power to PF Paths

AFTER



USB Cable mini B to Type A



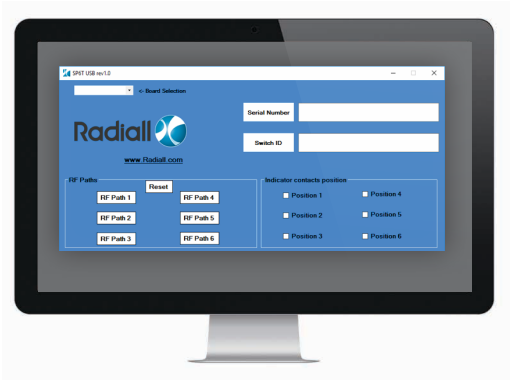

Control with computer

GRAPHICAL USER INTERFACE WITH MORE THAN ONE PRODUCT

- Every product has its own serial port. To control manually you can also open many soft front panel.
- Each product has its own serial number and different communication port.
- The user has also the possibility to manage the control automatically using LabView drivers provided or using Vb.net, C++ , C# with DLL provided also.

For more details information, consult "Application note_SwitchUSB" available on radiall.com.

USB Series

GENERAL SPECIFICATIONS

OPERATING MODE		NORMALLY OPEN	
Nominal operating voltage	Vdc	5	
Coil resistance (+/-10%)	Ω	11.9	
Nominal operating current at 23 °C	mA	420	
Average Power		See Power Rating Chart page 1-13	
Indicator rating		Indicators status are returned by software	
Switching time (max)	ms	15 ms	
Life	Non-terminated SP6T (R573 series)	SMA	SMA 2.9
		5 million cycles	2 million cycles
	Terminated SP6T (R574 series)	3 million cycles	2 million cycles
	SP8T (all models)	3 million cycles	
Connectors		SMA - SMA 2.9	
Actuator terminals		Mini USB socket	
Operating temperature range	SMA - SMA 2.9	-25 °C to +75 °C	
Storage temperature range	SMA - SMA 2.9	-55 °C to +85 °C	
Vibration (MIL STD 202, method 204D, cond.D)		10 - 2000 Hz , 20 g operating - switch only	
Shock (MIL STD 202, method 213B, cond.C)		100 g / 6 ms, 1/2 sine operating - switch only	

RF PERFORMANCE - SP6T

CONNECTORS	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	IMPEDANCE Ω
SMA	DC - 26.5	DC - 6	1.20	0.3 + 0.015 x frequency (GHz)	80	50
		6 - 12.4	1.35		70	
		12.4 - 20	1.45		65	
		20 - 26.5	1.70		60	
SMA 2.9	DC - 40	DC - 6	1.20		80	
		6 - 12.4	1.35		70	
		12.4 - 18	1.45		65	
		18 - 26.5	1.70		60	
		26.5 - 40	1.90		55	


RF PERFORMANCE - SP8T

CONNECTORS	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	IMPEDANCE Ω
SMA	DC - 26.5	DC - 3	1.20	0.20	80	50
		3 - 8	1.30	0.30	70	
		8 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.90	0.60	60	
		18 - 22	1.70	0.70	60	
		22 - 26.5	2.00	1.10	55	
SMA 2.9	DC - 40	DC - 6	1.30	0.30	80	
		6 - 12.4	1.30	0.40	70	
		12.4 - 18	1.50	0.60	70	
		18 - 26.5	2.00	0.70	70	
		26.5 - 40	2.20	1.50	70	


TYPICAL RF PERFORMANCE

Example: SP6T SMA up to 26.5 GHz

INSERTION LOSS & ISOLATION

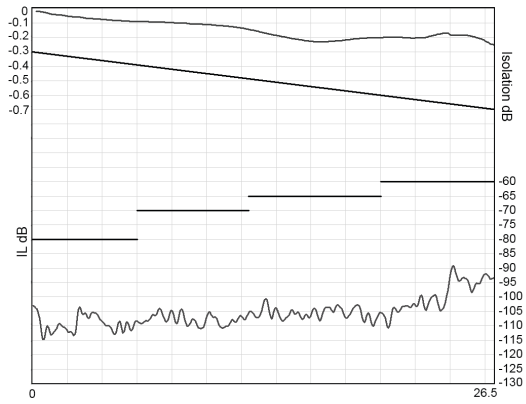


V.S.W.R

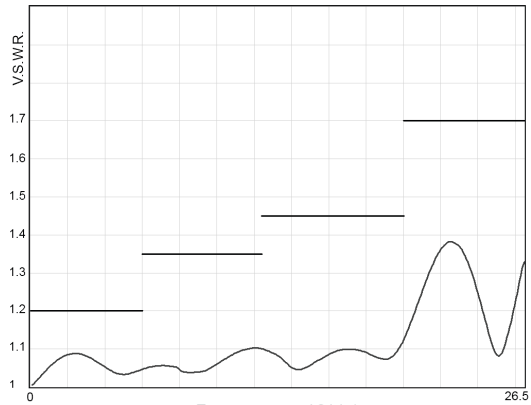


Example: SP8T SMA up to 26.5 GHz

INSERTION LOSS & ISOLATION

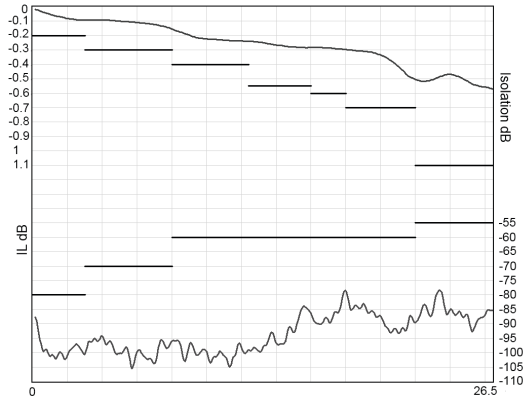


V.S.W.R

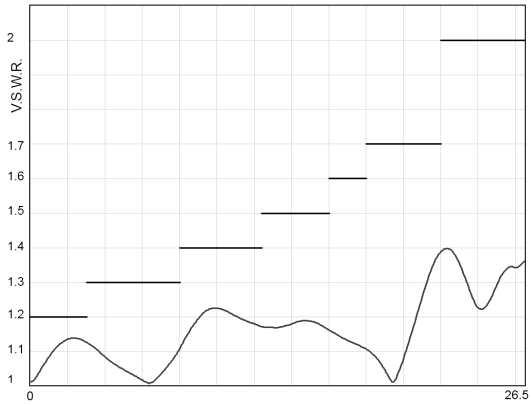


Example: SP8T SMA 2.9 up to 40 GHz

INSERTION LOSS & ISOLATION

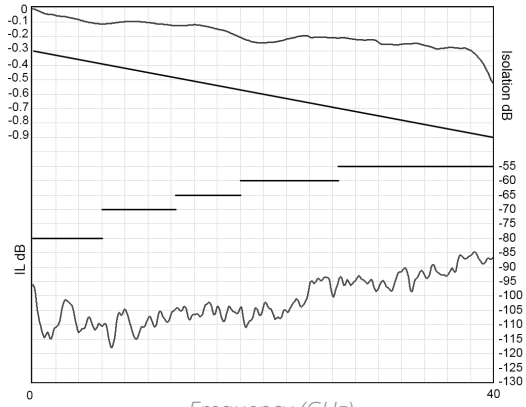


V.S.W.R

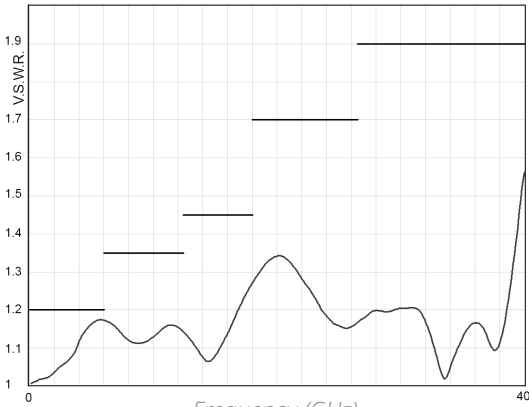


TYPICAL OUTLINE DRAWINGS

Non-terminated or terminated 6 positions

SMA MODEL

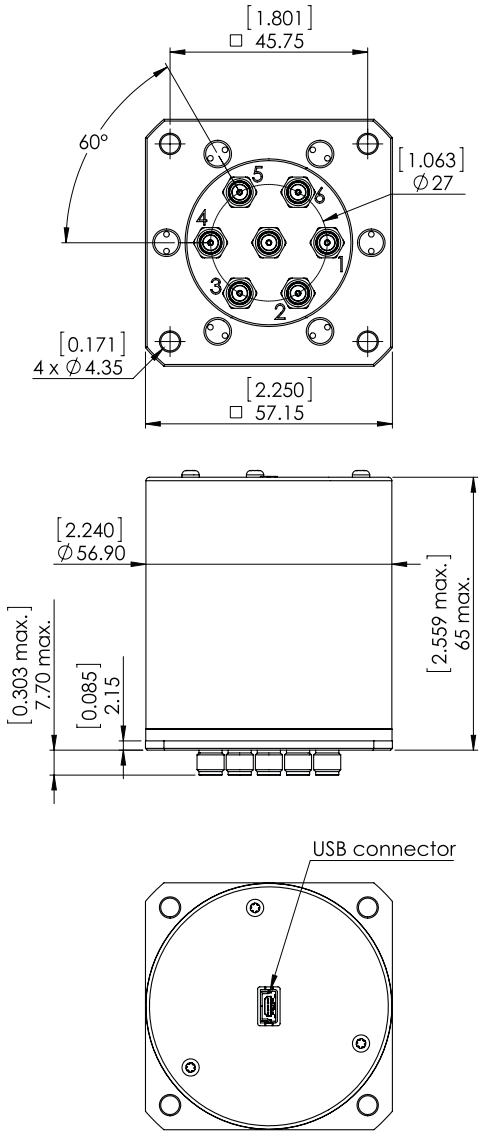

SMA 2.9 MODEL

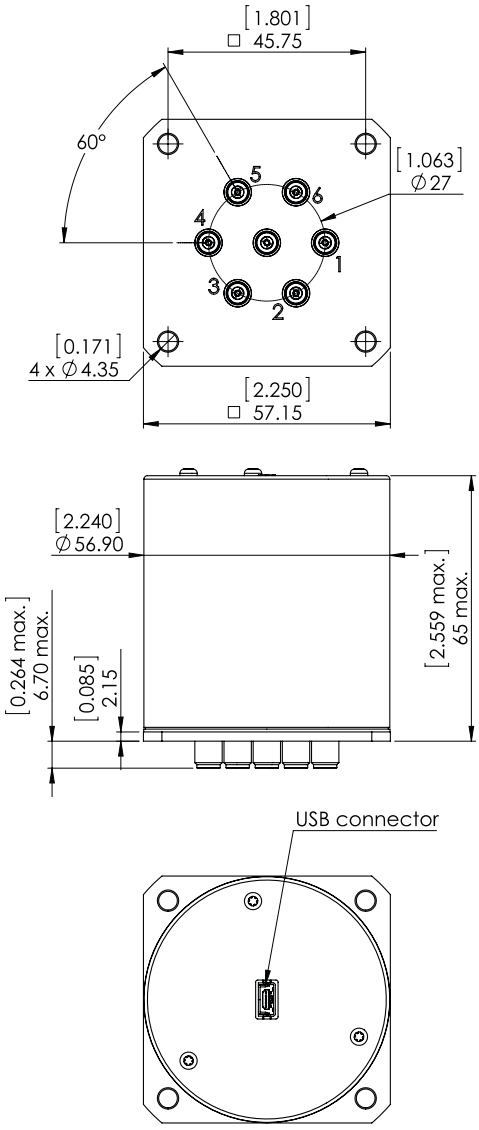


Notes

All dimensions are in millimeters [inches].

TYPICAL OUTLINE DRAWINGS

Non-terminated or terminated 8 positions

SMA MODEL

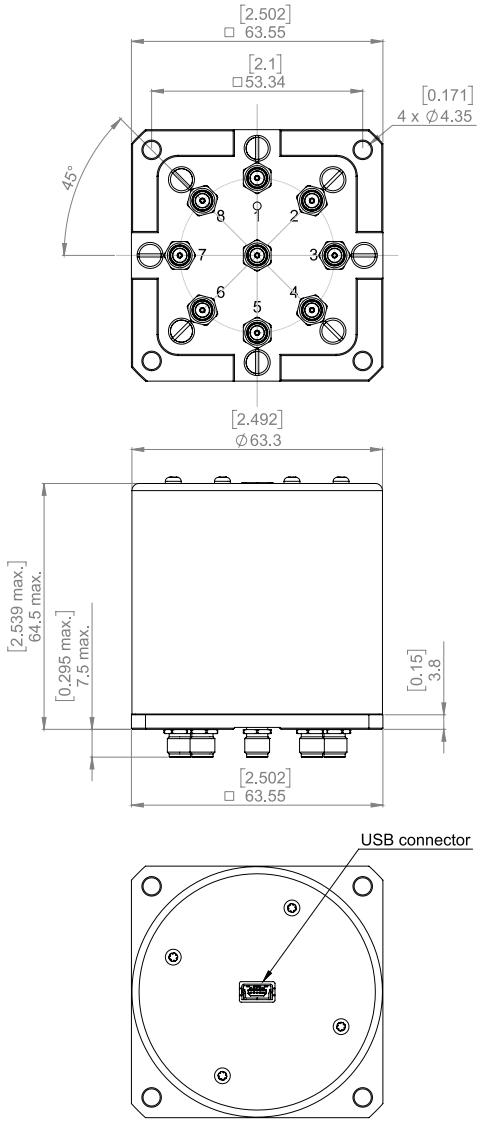

Notes

All dimensions are in millimeters [inches].

For electrical schematics see page 5-47.

SPnT TERMINATED & NON-TERMINATED UP TO 67 GHz

SMA – SMA 2.9 - 1.85 MM - 2.4 MM - QMA - DIN 1.6 / 5.6



Radiall's R573 and R574 multi-throw coaxial switches are offered in many configurations (over 40,000 possible combinations) including terminated and non-terminated options. Radiall offers reliable products, with shorter delivery times and competitive pricing. Excellent typical RF performance make RAMSES switches (67 GHz) ideal for Automated Test Equipment (ATE) and other measurement applications. These switches are suitable for defense, industrial, instrumentation and telecommunication applications.

Example of P/N: R574G53605 is a terminated SP6T SMA up to 18 GHz, Latching, Self Cut-Off, 28 Vdc, Indicators and male 25 pin D-Sub connector.

PART NUMBER SELECTION

R57

SERIES PREFIX

MODEL
3: Without 50 Ω termination
4: With 50 Ω termination

RF CONNECTORS
E: QMA up to 6 GHz [3 & 9]
4: SMA up to 18 GHz
F: SMA up to 26.5 GHz
G: SMA 18 GHz with square flange [4 & 12]
8: SMA 2.9 up to 40 GHz [10]
J: 2.4 mm up to 50 GHz [8]
9: DIN 1.6/5.6 up to 2.5 GHz [3
V: 1.85 mm up to 67 GHz

TYPE
0: Normally open
1: Normally open I.C.
2: Latching
3: Latching + I.C.
4: Latching + S.C.O. [1]
5: Latching + S.C.O. + I.C. [1]
8: Latching + S.C.O. + A.R. [1]
9: Latching + S.C.O. + I.C. + A.R. [1]

ACTUATOR VOLTAGE
2: 12 Vdc
3: 28 Vdc

NUMBER OF POSITIONS
3: 3 positions
4: 4 positions
5: 5 positions
6: 6 positions

OPTIONS [11]
0: Without option
1: Positive common [4]
2: Compatible TTL driver [1 & 6]
3: With suppression diodes
4: With suppression diodes and positive common [8]
8: BCD TTL driver compatible [1, 2, 5 & 6]

ACTUATOR TERMINALS
0: Solder pins
5: D-Sub connector

Notes

I.C.: Indicator contact / S.C.O.: Self Cut-Off / A.R.: Auto Reset
1. These models are already equipped with suppression diodes
2. Latching BCD driver enables also a global reset through driver code 0000 (see BCD logic coding page 1-11)
3. Model "3" only
4. From 3 to 6 positions, this option is only available for type 0, 1, 2, 3 and for type 8 and 9 combined with 28 Vdc.
5. Option available only with type 0, 1, 8 and 9
6. Polarity is not relevant to application for switches with TTL driver
7. Available only with 4 and 6 positions.
8. Option available only with type 0, 1, 2, and 3
9. The QLF tradermark (quick lock formula®) standard applies to QMA and QN series and guaranties the full intermateability between suppliers using this tradermark. Using QLF certificied connectors also guarantees the specified level of RF performance
10. Connector SMA 2.9 is equivalent to "K connector®", registered trademark of Anritsu
11. For precisions see availabilty of options chart page 5-9
12. Model "4" only

GENERAL SPECIFICATIONS

Type 2, 3, 4 and 5:

Latching models have a RESET pin which commands the reset of all positions. This command should be used before switching from one position to another. If not, two positions will be set at the same time.

Note: During the RESET operation the global current is: the nominal operating current multiplied by the number of positions.

Type 8, 9:


Latching models with AUTOMATIC RESET are available; these products have an internal SET/RESET circuit which automatically resets all the non-selected positions and sets the desired position. This option simplifies the use of latching switches by suppressing the RESET command in switching sequence.

An electronic circuit supplies successively groups of 2, 3 or 4 actuators, in order to limit the maximum current. The current with this option is the total current of 2, 3 or 4 reset coils in the same time (see table below).


Example: During the AUTOMATIC RESET operation, at 28 Vdc, 4 position switch has a temporary consumption of only 250 mA, during 40 ms maximum.

SWITCHING SEQUENCE

FOR SP3T

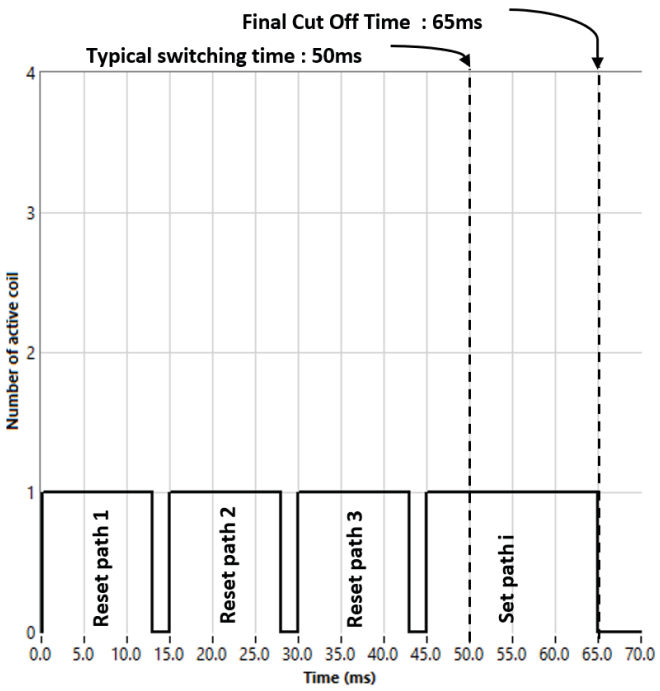

FOR SP4T

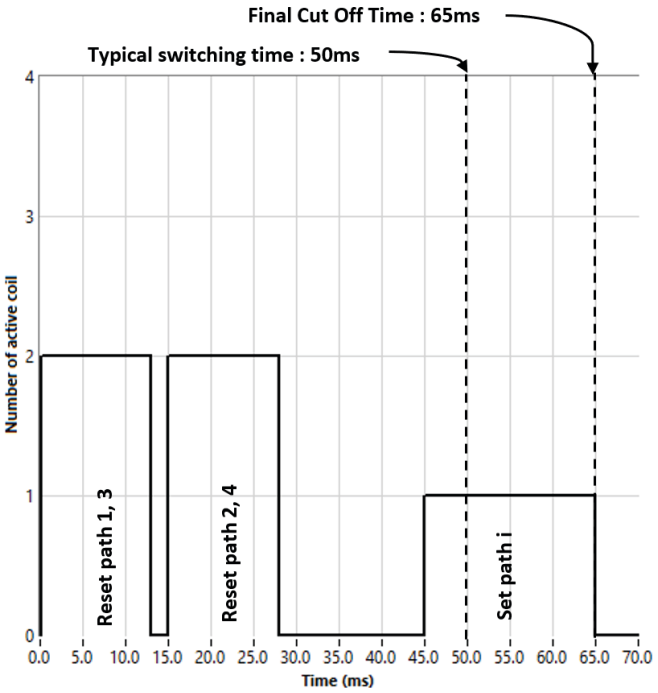

OPERATING TOTAL CURRENT AT 23 °C (mA) SPnT LATCHING

NUMBER OF POSITIONS	12 VOLTS		28 VOLTS	
	MANUAL RESET	AUTOMATIC RESET	MANUAL RESET	AUTOMATIC RESET
3	320 × n 960 mA	320 mA	125 × n 375 mA	125 mA

OPERATING TOTAL CURRENT AT 23 °C (mA) SPnT LATCHING


NUMBER OF POSITIONS	12 VOLTS		28 VOLTS	
	MANUAL RESET	AUTOMATIC RESET	MANUAL RESET	AUTOMATIC RESET
4	320 × n 1280 mA	640 mA	125 × n 500 mA	250 mA

Notes


n = number of positions

Availability of options according to both type and number of positions

FOR SP5T

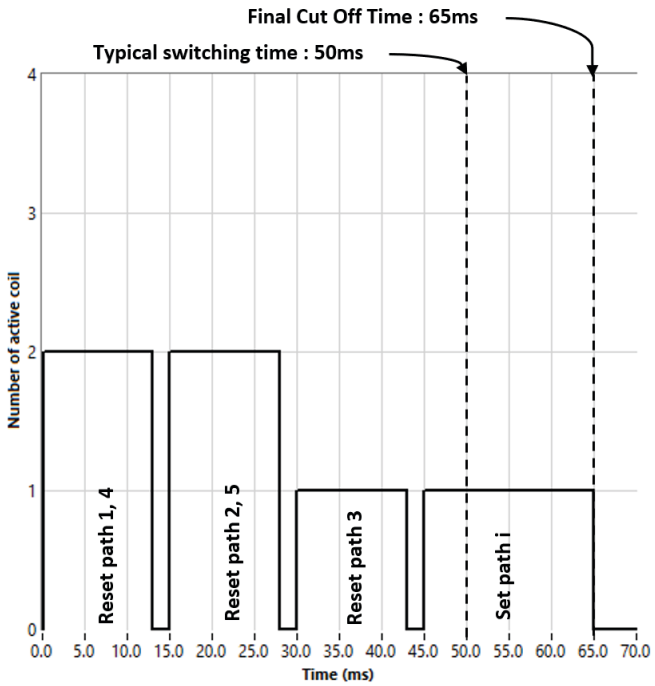

FOR SP6T

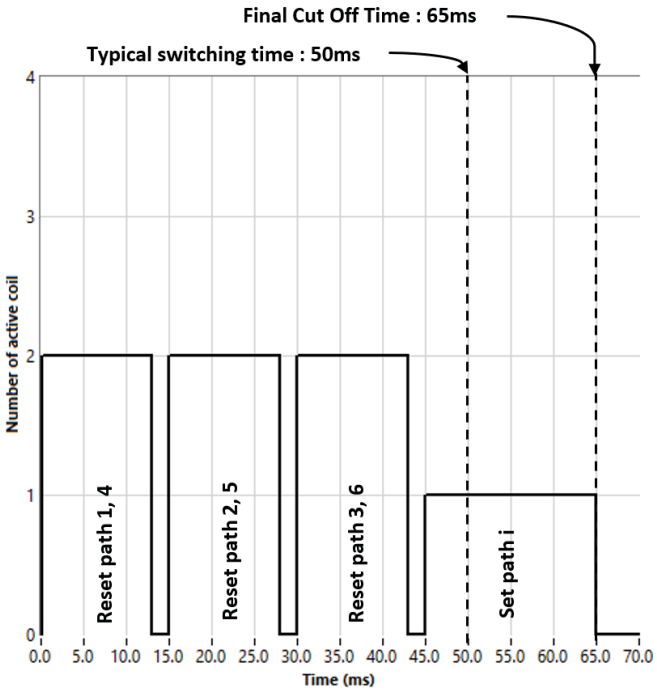

OPERATING TOTAL CURRENT AT 23 °C (mA) SPnT LATCHING

NUMBER OF POSITIONS	12 VOLTS		28 VOLTS	
	MANUAL RESET	AUTOMATIC RESET	MANUAL RESET	AUTOMATIC RESET
5	320 × n	640 mA	125 × n	250 mA
	1600 mA		625 mA	

OPERATING TOTAL CURRENT AT 23 °C (mA) SPnT LATCHING

NUMBER OF POSITIONS	12 VOLTS		28 VOLTS	
	MANUAL RESET	AUTOMATIC RESET	MANUAL RESET	AUTOMATIC RESET
6	320 × n	640 mA	125 × n	250 mA
	1920 mA		750 mA	

Notes

n = number of positions

Availability of options according to both type and number of positions

GENERAL SPECIFICATIONS

OPERATING MODE		NORMALLY OPEN		LATCHING	
Nominal operating voltage (across operating temperature)	Vdc	12 (10.2/13)	28 (24/30)	12 (10.2/13)	28 (24/30)
Coil resistance (+/-10%)	Ω	47.5	275	See tables on previous pages	
Nominal operating current at 23 °C	mA	250	102		
Average power		See Power Rating Chart page 1-13			
TTL input	High Level	2.2 to 5.5 V (TTL Option) / 800 µA max 5.5 volts 3.5 to 5.5 V (BCD Option)			
	Low Level	0 to 0.8 V (TTL Option) / 20 µA max 0.8 volts 0 to 1.5 V (BCD Option)			
Indicator rating		1 W / 30 V / 100 mA			
Switching time (Max)	ms	15 ms For automatic reset models SP3T to SP6T: 45 ms			
Quiescent current at 23 °C	mA				
Life	Non-terminated SP3 to 6T (R573 series)	SMA - QMA		SMA 2.9 - 1.85 mm - 2.4 mm - 1.6/5.6	
		5 million cycles		2 million cycles	
	Terminated SP3 to 6T (R574 series)	3 million cycles			
Connectors		SMA - SMA 2.9 - 1.85 mm - 2.4 mm - QMA - DIN 1.6/5.6			
Actuator terminals		Solder pins or male 25 pin D-sub connector			
Operating temperature range	1.85 mm - 2.4 mm - DIN 1.6/5.6	-25 °C to +70 °C			
	SMA - SMA 2.9 - QMA	-40 °C to +85 °C			
Storage temperature range	1.85 mm - 2.4 mm - DIN 1.6/5.6	-40 °C to +85 °C			
	SMA - SMA 2.9 - QMA	-55 °C to +85 °C			
Vibration (MIL STD 202, method 204D, cond.D)		10 - 2000 Hz , 20 g operating for SP3 to 6T			
Shock (MIL STD 202, method 213B, cond.C)		100 g / 6 ms, 1/2 sine operating for SP3 to 6T			

RF PERFORMANCE - SMA CONNECTOR

NUMBER OF POSITIONS	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	IMPEDANCE Ω
3 to 6	DC - 18 DC - 26.5	DC - 3	1.20	0.20	80	50
		3 - 8	1.30	0.30	70	
		8 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.70	0.70	50	

RAMSES Series


RF PERFORMANCE

CONNECTORS	NUMBER OF POSITIONS	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) DB	ISOLATION (MIN) DB	IMPEDANCE Ω
SMA 2.9	3 to 6	DC - 40	DC - 6	1.30	0.20	70	50
			6 - 12.4	1.40	0.40	60	
			12.4 -18	1.50	0.50	60	
			18 - 26.5	1.70	0.70	55	
			26.5 - 40	2.20	1.10	50	
2.4 mm	4 or 6	DC - 50	DC - 6	1.30	0.20	70	
			6 - 12.4	1.40	0.40	60	
			12.4 - 18	1.50	0.50	60	
			18 - 26.5	1.70	0.70	55	
			26.5 - 40	1.90	0.90	50	
			40 - 50	2.20	1.20	50	
1.85 mm	4 or 6	DC - 67	DC - 6	1.30	0.30	70	
			6 - 12.4	1.40	0.40	60	
			12.4 - 18	1.50	0.50	60	
			18 - 26.5	1.70	0.70	55	
			26.5 - 40	1.90	0.90	50	
			40 - 50	2.20	1.20	50	
			50 - 65	2.20	1.40	50	
			65 - 67	2.20	1.70	50	
1.6/5.6	3 to 6	DC - 2.5	DC - 1	1.30	0.20	80	75
			1 - 2.5	1.40	0.30	70	
QMA	3 to 6	DC - 6	DC - 3	1.20	0.20	80	50
			3 - 6	1.30	0.30	70	


R573 & R574 TYPICAL PERFORMANCE

Example: SP6T QMA up to 6 GHz

INSERTION LOSS & ISOLATION

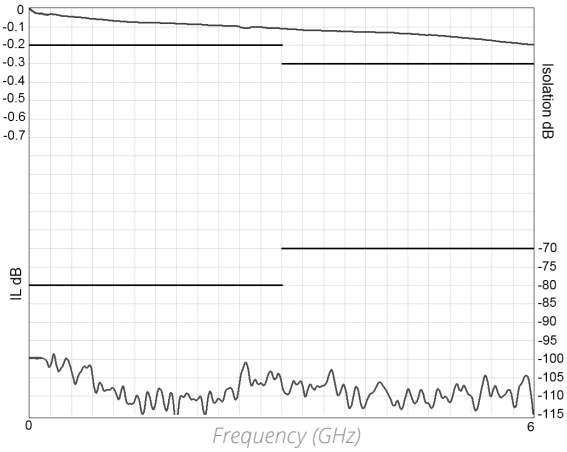


V.S.W.R.

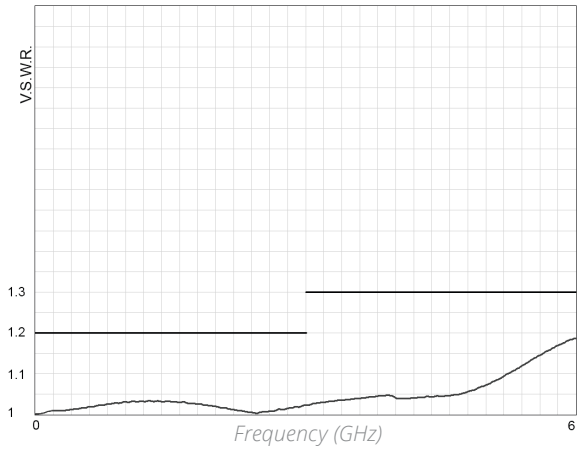


Example: Non-terminated SP6T 1.6/5.6 up to 2.5 GHz

INSERTION LOSS & ISOLATION

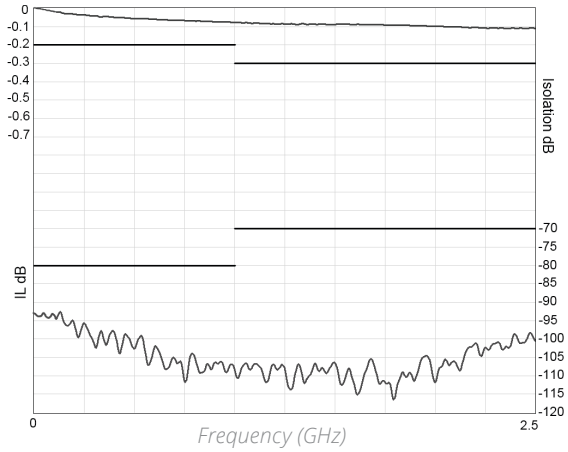


V.S.W.R

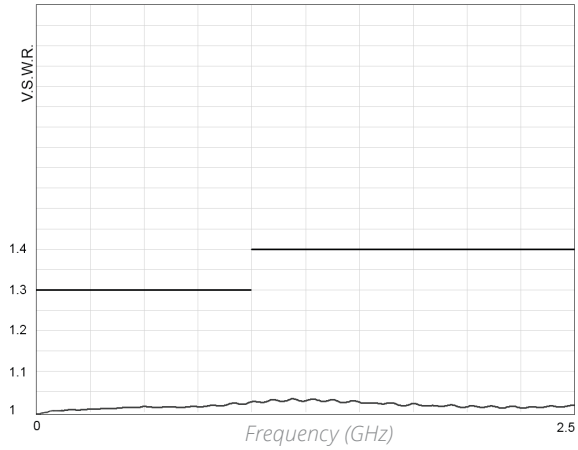


Example: Non-terminated SP6T up to 26.5 GHz

INSERTION LOSS & ISOLATION

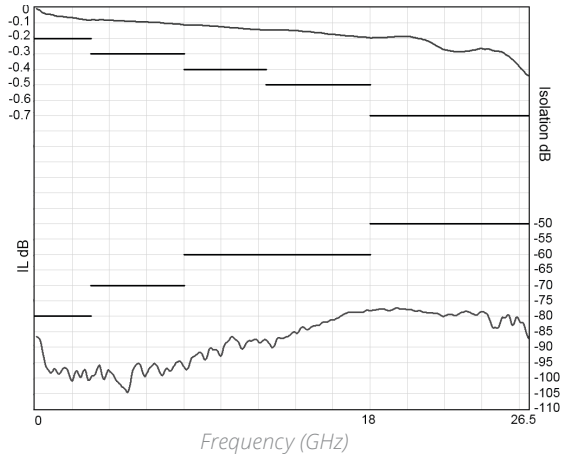


V.S.W.R

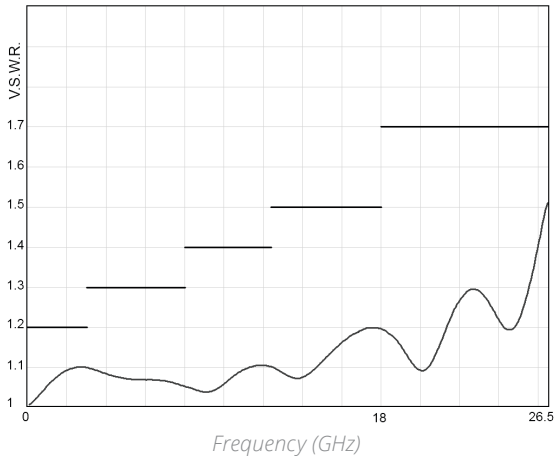


Example: Non-terminated SP6T SMA 2.9 up to 40 GHz

INSERTION LOSS & ISOLATION

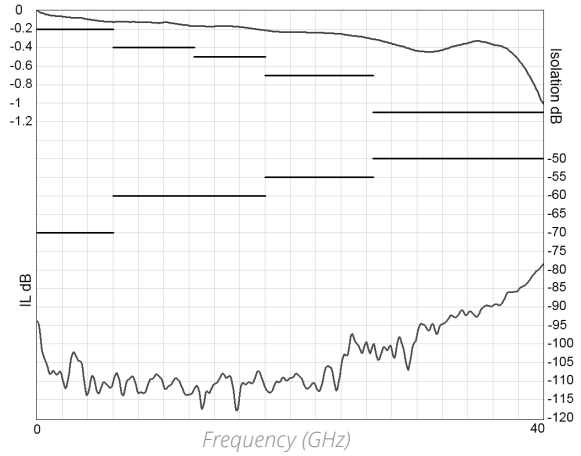


V.S.W.R

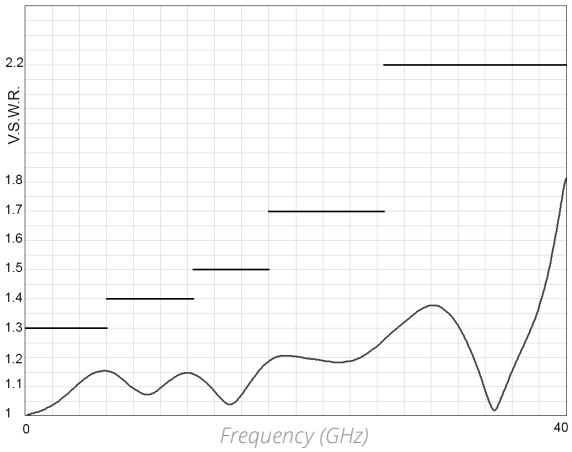


RAMSES Series

Example: Non-terminated SP6T 2.4 mm up to 50 GHz

INSERTION LOSS & ISOLATION

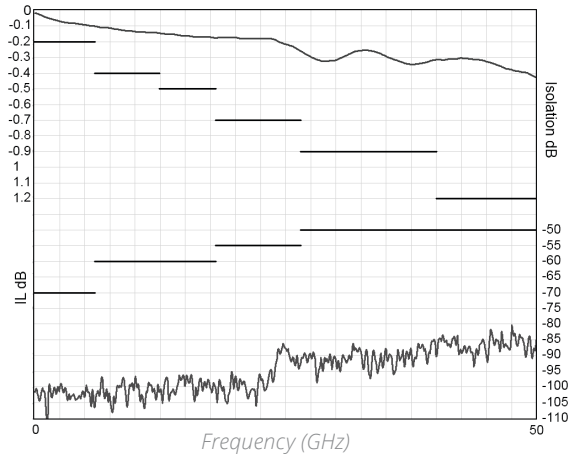


V.S.W.R

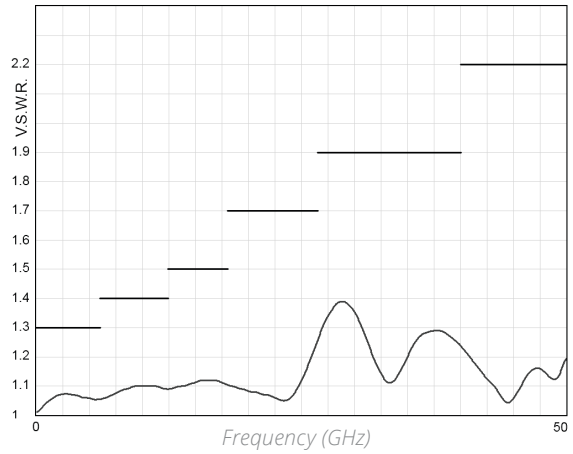


Example: Terminated SP6T 1.85 mm up to 67 GHz

INSERTION LOSS & ISOLATION

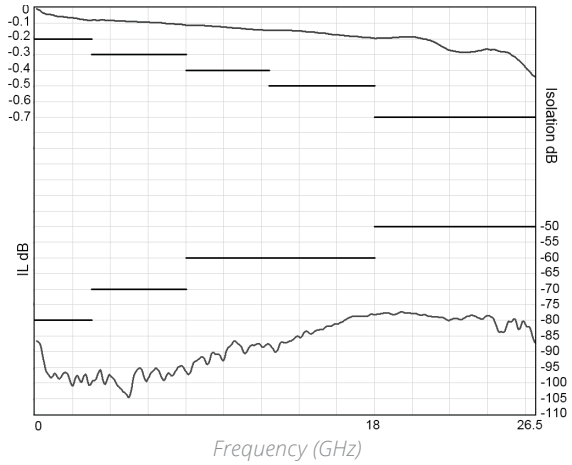


V.S.W.R

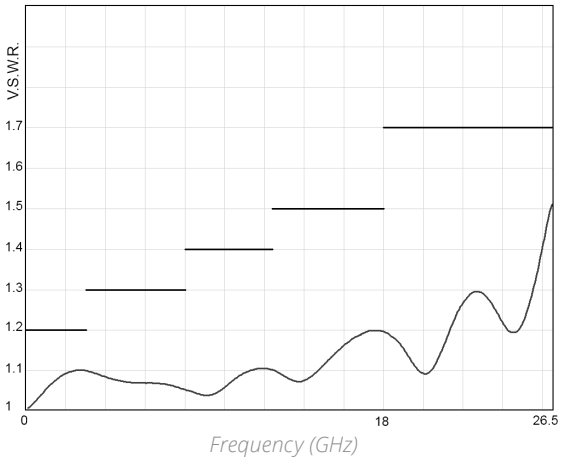


Example: Terminated SP6T up to 26.5 GHz

INSERTION LOSS & ISOLATION

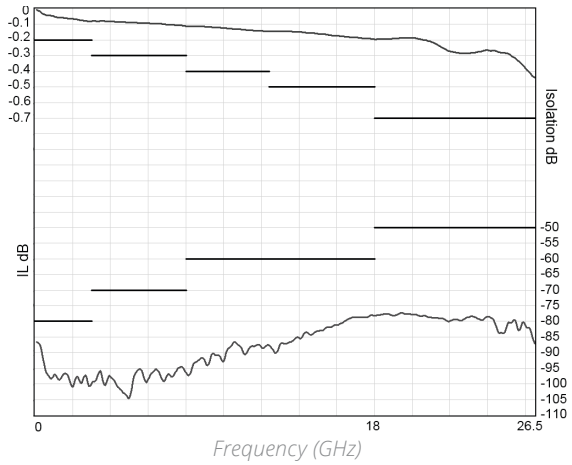


V.S.W.R

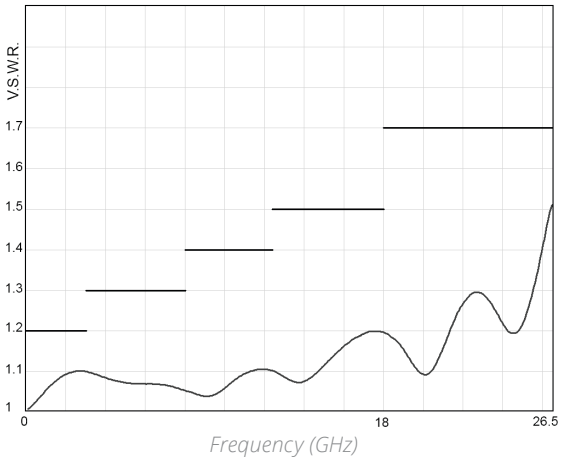


Example: Terminated SP6T SMA 2.9 up to 40 GHz

INSERTION LOSS & ISOLATION

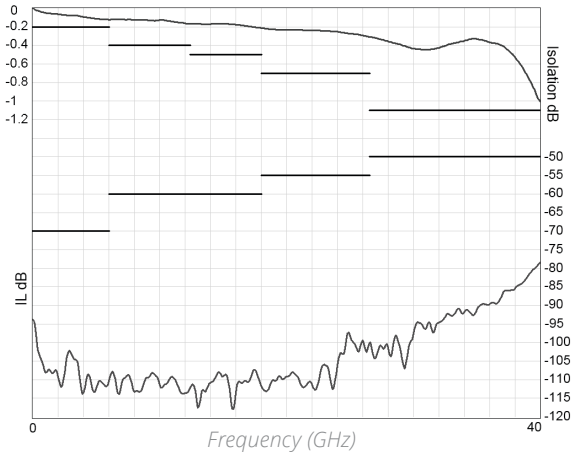


V.S.W.R

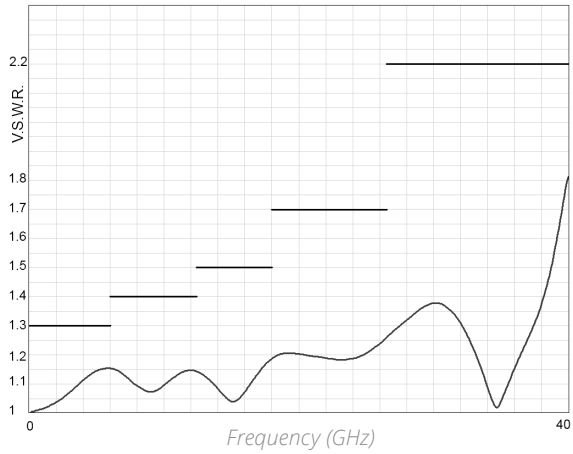


Example: Terminated SP6T 2.4 mm up to 50 GHz

INSERTION LOSS & ISOLATION

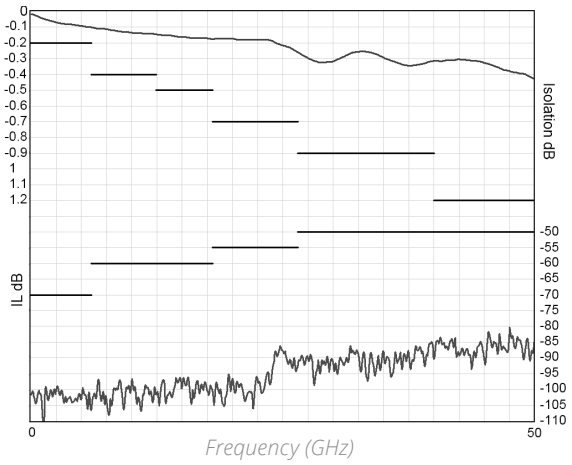

V.S.W.R

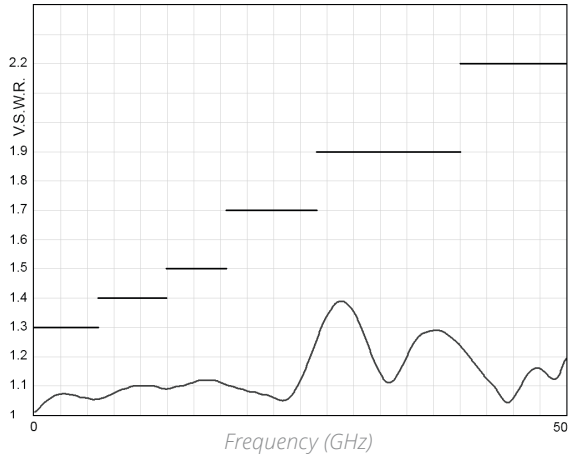


TYPICAL OUTLINE DRAWINGS

NON-TERMINATED 3 TO 6 POSITIONS

CONNECTORS	A MAX (mm [INCHES])
SMA up to 26.5 GHz	7.7 [0.303]
SMA 2.9 up to 40 GHz	6.7 [0.264]
2.4 mm up to 50 GHz	6.7 [0.264]
1.85 mm up to 67 GHz	6.7 [0.264]
QMA up to 6 GHz	10.8 [0.394]
DIN 1.6 / 5.6 up to 2.5 GHz	11.5 [0.433]

SOLDER PINS	Type 0 or 1 with option 0 - 1 - 3 or 4
	Type 2 or 3 with option 0 or 1

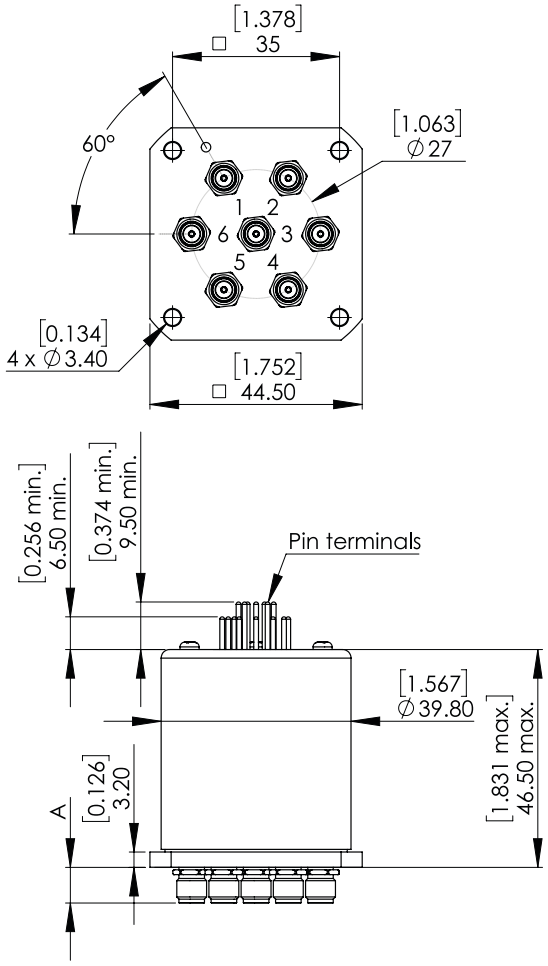

Notes

All dimensions are in millimeters [inches].


TYPICAL OUTLINE DRAWINGS


NON-TERMINATED 3 TO 6 POSITIONS (CONTINUED)

SOLDER PINS	Type 0 or 1 with option 2 or 8
	Type 2 or 3 with option 2 - 3 - 4 or 8
	Type 4 - 5 - 8 or 9 with option 0 - 1 - 2 or 8

D-SUB CONNECTOR	All models

CONNECTORS	A MAX (mm [INCHES])
SMA up to 26.5 GHz	7.7 [0.303]
SMA 2.9 up to 40 GHz	6.7 [0.264]
2.4 mm up to 50 GHz	6.7 [0.264]
1.85 mm up to 67 GHz	6.7 [0.264]
QMA up to 6 GHz	10.8 [0.394]
DIN 1.6 / 5.6 up to 2.5 GHz	11.5 [0.433]




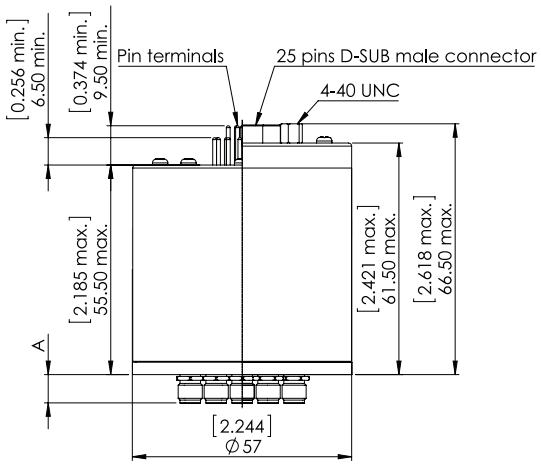


TYPICAL OUTLINE DRAWINGS

Terminated 3 to 6 positions 18 GHz, 26.5 GHz, 40 GHz, 50 GHz and 67 GHz

SMA 18 GHZ & 26.5 GHz MODEL

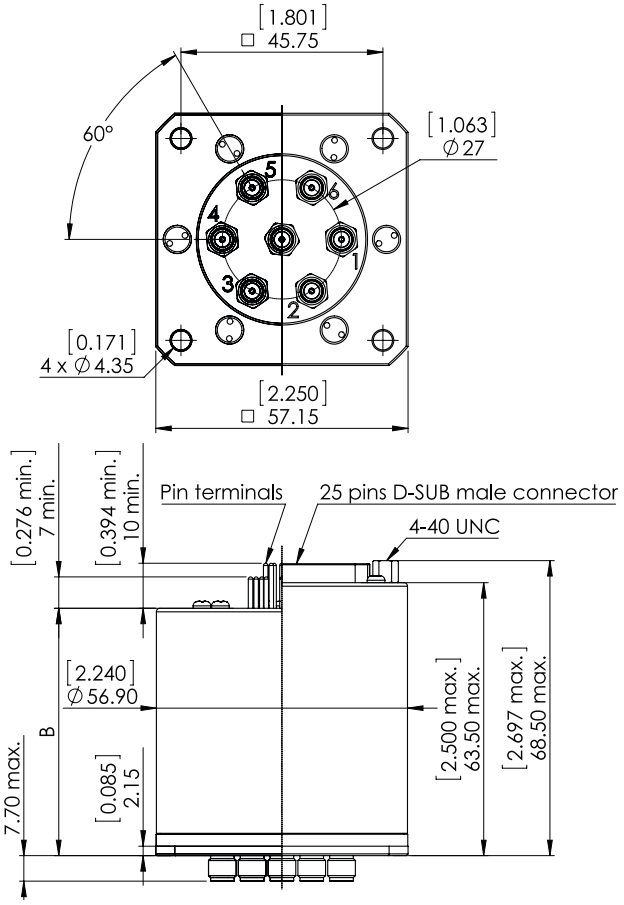

SMA 2.9 40 GHz, 2.4 mm 50 GHz & 1.85 mm 67 GHz MODEL

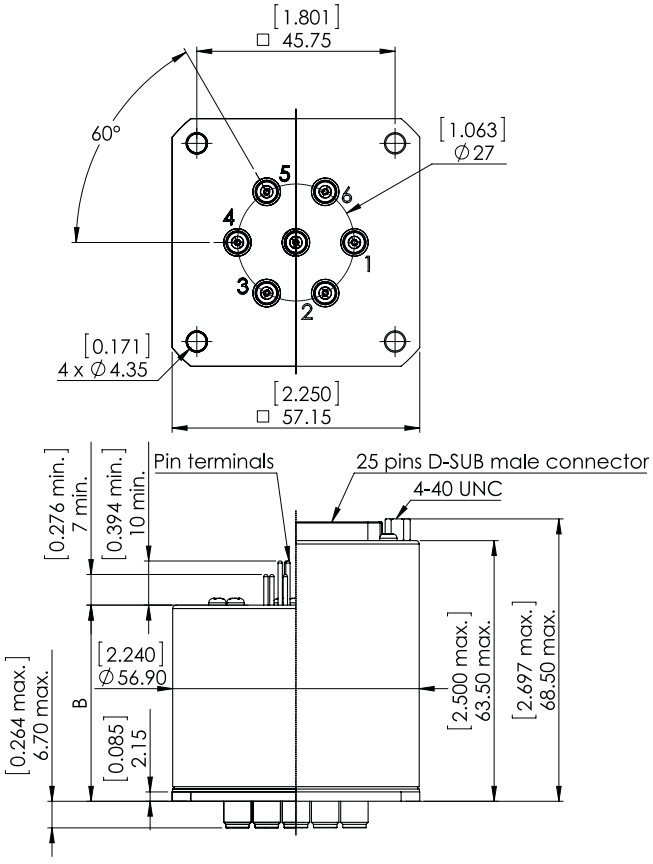

	B
	SOLDER PINS
Type 0 - 1 - 2 or 3 with option 0 - 1 - 3 or 4	48.5 [1.89]
Type 0 - 1 - 2 or 3 with option 2 or 8	57.5 [2.24]
Type 4 - 5 - 8 or 9 with option 0 - 1 - 2 or 8	57.5 [2.24]

Notes

All dimensions are in millimeters [inches].

SP8 TO 12T TERMINATED & NON-TERMINATED UP TO 40 GHz

SMA AND SMA 2.9 WITH SQUARE FLANGE



Radiall's R523 and R524 multi-throw coaxial switches are offered in many configurations (over 40,000 possible combinations) including terminated and non-terminated options. Radiall offers reliable products, with shorter delivery times and competitive pricing. Excellent typical RF performances make RAMSES switches (40 GHz) ideal for Automated Test Equipment (ATE) and other measurement applications. These switches are suitable for defense, industrial, instrumentation and telecommunication applications.

Example of P/N: R524F53805 is a terminated SP8T SMA up to 26.5 GHz, Latching, Self-Cut-Off, 28 Vdc, Indicators and male 25 pin D-Sub connector.

PART NUMBER SELECTION

R52

SERIES PREFIX

MODEL
3: Without 50 Ω termination
4: With 50 Ω termination

RF CONNECTORS
4: SMA up to 18 GHz
H: SMA up to 22 GHz [2]
F: SMA up to 26.5 GHz [7]
8: SMA 2.9 up to 40 GHz [7 & 8]

TYPE
0: Normally open
1: Normally open I.C.
2: Latching
3: Latching + I.C.
4: Latching + S.C.O. [1]
5: Latching + S.C.O. + I.C. [1]
8: Latching + S.C.O. + A.R. [1]
9: Latching + S.C.O. + I.C. + A.R. [1]

ACTUATOR VOLTAGE
2: 12 Vdc
3: 28 Vdc

NUMBER OF POSITIONS
8: 8 positions
0: 10 positions [9]
2: 12 positions [9]

OPTIONS
0: Without option
1: Positive common [4]
2: Compatible TTL driver [1 & 5]
3: With suppression diodes
4: With suppression diodes and positive common [8]
8: BCD TTL driver compatible [1, 3, 5 & 6]

ACTUATOR TERMINALS
0: Solder pins
5: D-Sub connector

Notes

I.C.: Indicator contact / S.C.O.: Self Cut-Off / A.R.: Auto Reset
1. These models are already equipped with suppression diodes
2. Only available for 10 positions
3. Latching BCD driver enables also a global reset through driver code 0000 (see BCD logic coding page 1-11)
4. 8 positions, this option is only available for type 0, 1, 2, 3 and for type 8 and 9 combined with 28 Vdc. From 10 to 12 positions, only for type 0, 1, 2 and 3.
5. Polarity is not relevant to application for switches with TTL driver
6. This option is only available with type 0, 1, 8 and 9.
7. Only available for 8 positions
8. Connector SMA 2.9 is equivalent to "K connector®", registered trademark of Anritsu
9. Circular models are only available, please consult us. Square flange models product launch in Q1 2025.

GENERAL SPECIFICATIONS

Type 2, 3, 4 and 5:

Latching models have a RESET pin which commands the reset of all positions. This command should be used before switching from one position to another. If not, two positions will be set at the same time.

Note: During the RESET operation the global current is: the nominal operating current multiplied by the number of positions.

Type 8, 9:


Latching models with AUTOMATIC RESET are available; these products have an internal SET/RESET circuit which automatically resets all the non-selected positions and sets the desired position. This option simplifies the use of latching switches by suppressing the RESET command in switching sequence.

An electronic circuit supplies successively groups of 4 or 2 actuators, in order to limit the maximum current. The current with this option is the total current of 2 or 4 reset coils in the same time (see table below).


Example: During the AUTOMATIC RESET operation, at 28 Vdc, 8 position switch has a temporary consumption of only 250 mA, during 40 ms maximum.

SWITCHING SEQUENCE

FOR SP8T

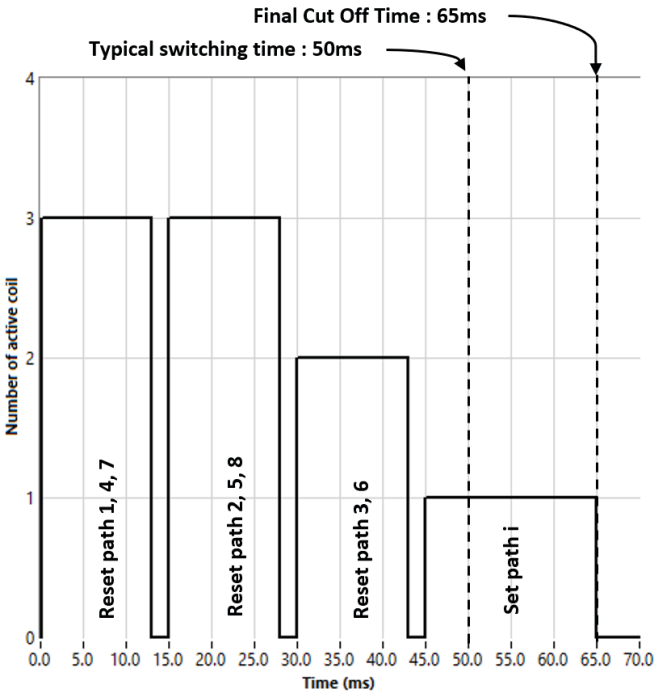

FOR SP10T

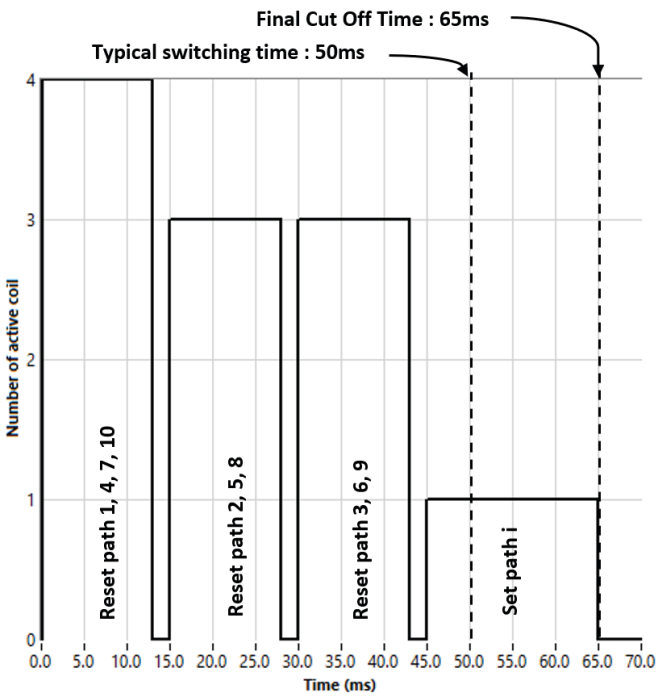

OPERATING TOTAL CURRENT AT 23 °C (mA) SPnT LATCHING

NUMBER OF POSITIONS	12 VOLTS		28 VOLTS	
	MANUAL RESET	AUTOMATIC RESET	MANUAL RESET	AUTOMATIC RESET
8	320 × n	960 mA	125 × n	375 mA
	2560 mA		1000	

OPERATING TOTAL CURRENT AT 23 °C (mA) SPnT LATCHING


NUMBER OF POSITIONS	12 VOLTS		28 VOLTS	
	MANUAL RESET	AUTOMATIC RESET	MANUAL RESET	AUTOMATIC RESET
10	320 × n	1280 mA	125 × n	500 mA
	3200 mA		1250	

Notes

n = number of positions

Availability of options according to both type and number of positions

FOR SP12T

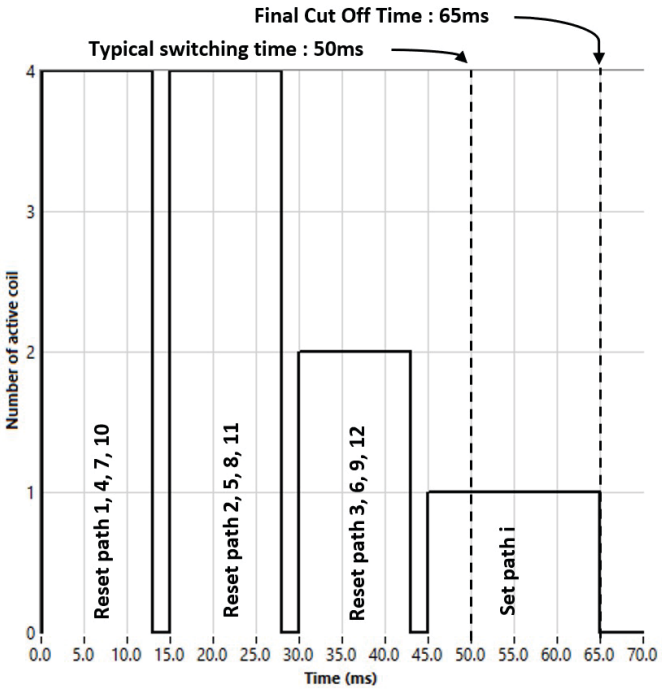

OPERATING TOTAL CURRENT AT 23 °C (mA) SPnT LATCHING

NUMBER OF POSITIONS	12 VOLTS		28 VOLTS	
	MANUAL RESET	AUTOMATIC RESET	MANUAL RESET	AUTOMATIC RESET
12	320 × n 3840 mA	1280 mA	125 × n 1500 mA	500 mA

Notes

n = number of positions

Availability of options according to both type and number of positions

GENERAL SPECIFICATIONS

OPERATING MODE			NORMALLY OPEN		LATCHING	
Nominal operating voltage (across operating temperature)	Vdc		12 (10.2/13)	28 (24/30)	12 (10.2/13)	28 (24/30)
Coil resistance (+/-10%)	Ω		47.5	275	See tables on previous pages	
Nominal operating current at 23 °C	mA		250	102		
Supply current (Quiescent) at 23 °C	mA		Min: 10 Max: 25			
Average power			See Power Rating Chart page 1-13			
TTL input	High Level		2.2 to 5.5 V (TTL Option) / 800 µA max 5.5 volts 2.2 to 5.5 V (BCD Option)			
	Low Level		0 to 0.8 V (TTL Option) / 20 µA max 0.8 volts 0 to 0.8 V (BCD Option)			
Indicator rating			1 W / 30 V / 100 mA			
Switching time (Max)	ms		15 ms For automatic reset models: SP8T to SP12T = 45 ms			
Life	SP8T	SMA	3 million cycles			
		SMA 2.9	2 million cycles			
	SP10 & 12T (all models)		2 million cycles			
Connectors			SMA & SMA 2.9			
Actuator terminals			Solder pins or male 25 pin D-sub connector			
Operating temperature range	SMA & SMA 2.9		-40 °C to +85 °C			
Storage temperature range	SMA & SMA 2.9		-55 °C to +85 °C			
Vibration (MIL STD 202, method 204D, cond.D)			10 - 2000 Hz, 20 g operating			
Shock (MIL STD 202, method 213B, cond.C)			100 g / 6 ms, 1/2 sine operating			


RF PERFORMANCE - SMA & SMA 2.9 CONNECTORS

NUMBER OF POSITIONS	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	IMPEDANCE Ω
8	DC - 26.5	DC - 3	1.20	0.20	80	50
		3 - 8	1.30	0.30	70	
		8 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.90	0.90	60	
	DC - 40	DC - 6	1.30	0.30	80	
		6 - 12.4	1.30	0.40	70	
		12.4 - 18	1.50	0.60	70	
		18 - 26.5	2.00	0.70	70	
		26.5 - 40	2.20	1.50	70	
10	DC - 22	DC - 3	1.20	0.20	80	
		3 - 8	1.30	0.30	70	
		8 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 22	1.90	0.90	60	
12	DC - 18	DC - 3	1.20	0.20	80	
		3 - 8	1.30	0.30	70	
		8 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	

R523 & R524 TYPICAL PERFORMANCE


Example: Terminated and Non-terminated
SP8T SMA up to 26.5 GHz

INSERTION LOSS & ISOLATION

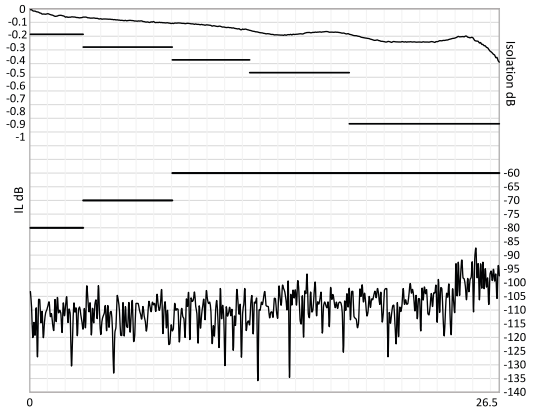

Frequency (GHz)


V.S.W.R.

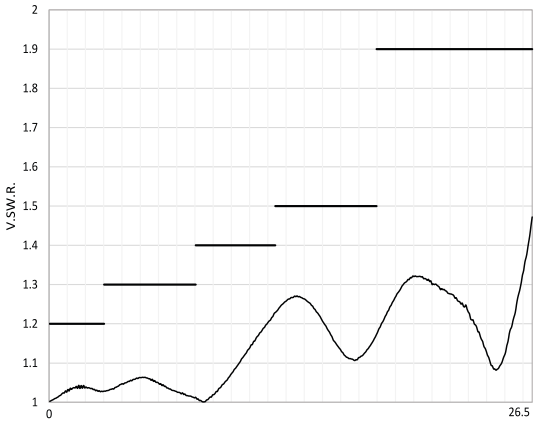

Frequency (GHz)


Example: Terminated and Non-terminated
SP8T up to 40 GHz

INSERTION LOSS & ISOLATION

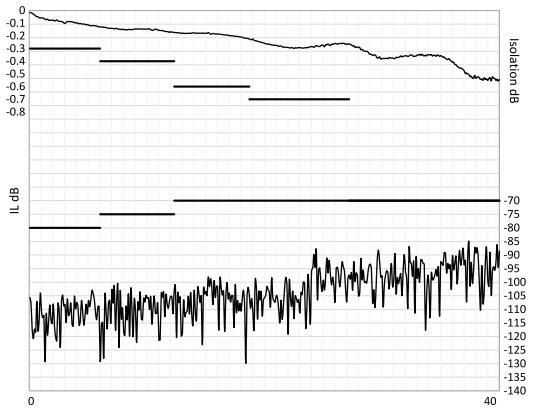

Frequency (GHz)


V.S.W.R.

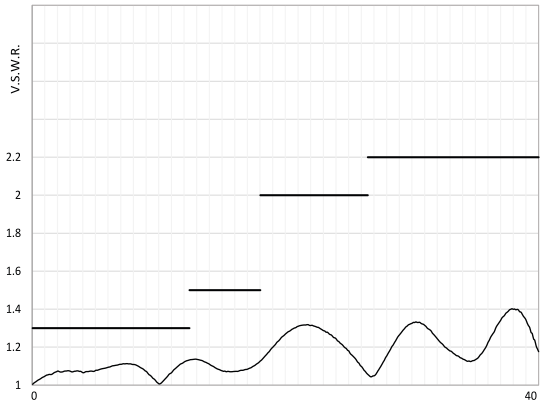

Frequency (GHz)


Example: Terminated and Non-terminated SP10T SMA up to 22 GHz

INSERTION LOSS & ISOLATION

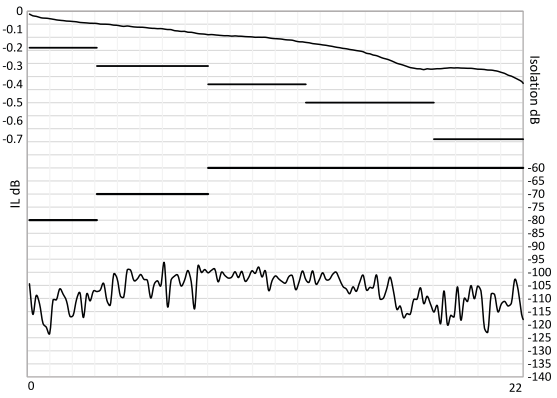

Frequency (GHz)


V.S.W.R.

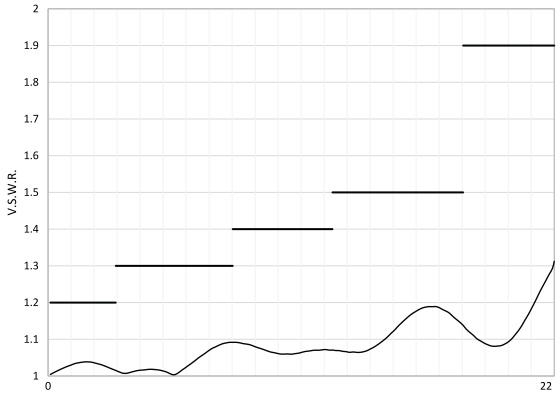

Frequency (GHz)


Example: Terminated and Non-terminated SP12T up to 18 GHz

INSERTION LOSS & ISOLATION

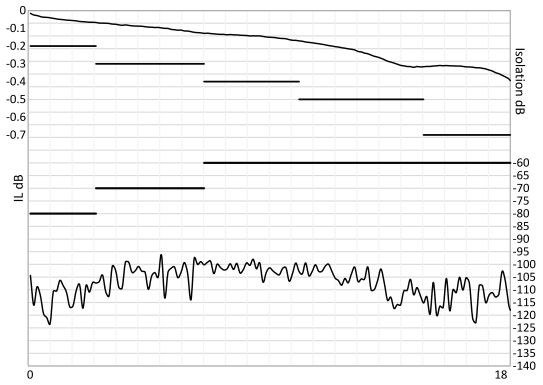

Frequency (GHz)

V.S.W.R.

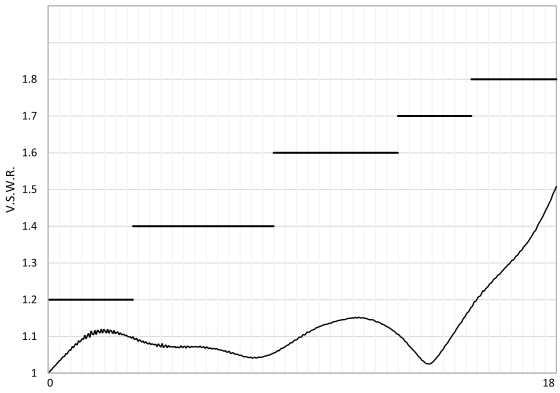



Frequency (GHz)

TYPICAL OUTLINE DRAWINGS

Terminated or non-terminated 8, 10 & 12 positions

TERMINATED & NON-TERMINATED 8 POSITIONS
SMA 26.5 & 40 GHZ MODEL

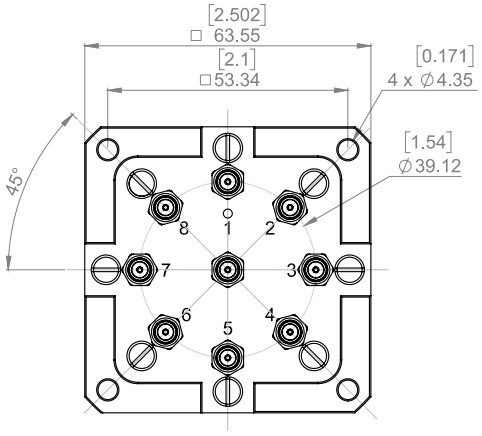

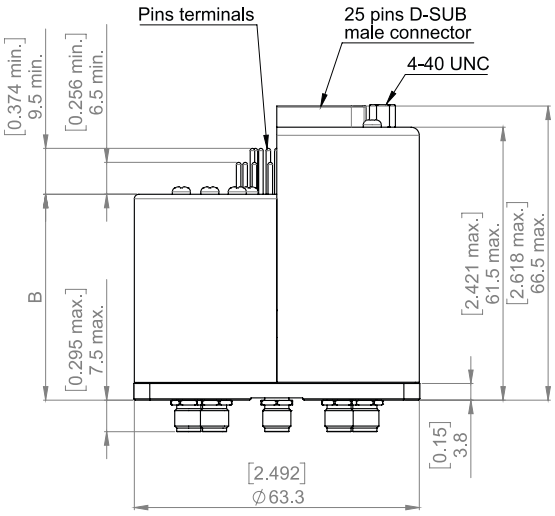


TYPE	B MAX (MM [INCHES])
	SOLDER PINS
Type 0 - 1 - 2 or 3 with option 0 - 1 - 3 or 4	46.5 [1.83]
Type 0 - 1 - 2 or 3 with option 2 or 8 and Type 4 - 5 - 8 or 9 with option 0 - 1 - 2 or 8	55.5 [2.18]


Notes

All dimensions are in millimeters [inches].

TERMINATED & NON-TERMINATED 10 POSITIONS
SMA 22 GHZ MODEL

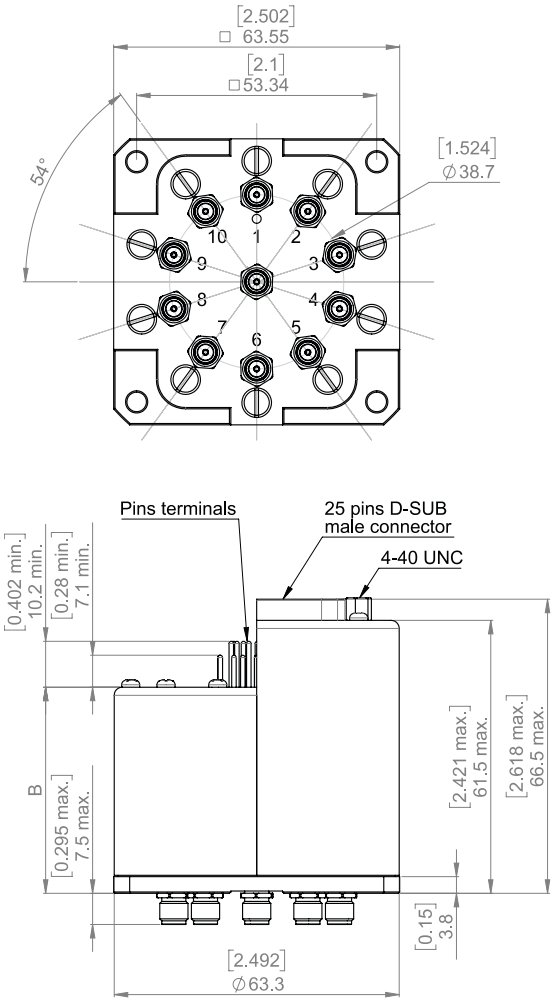


TERMINATED & NON-TERMINATED 12 POSITIONS
SMA 18 GHZ MODEL

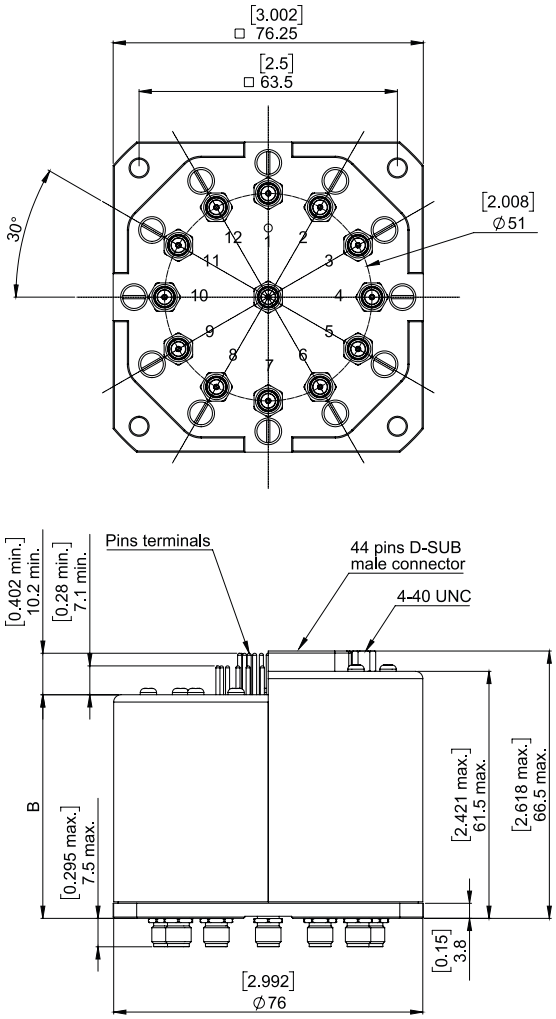

SPnT UP TO 12.4 GHz - RAMSES CONCEPT

N - BNC - TNC

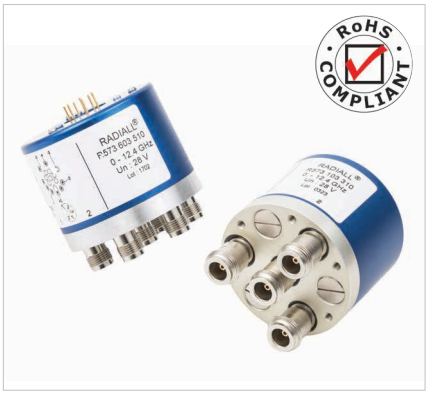

Radiall's R573 and R574 multi-throw coaxial switches are offered in many configurations (over 40,000 possible combinations), including terminated and non-terminated options. Radiall offers reliable products, with shorter delivery times and competitive pricing. Excellent typical RF performance make RAMSES switches (12.4 GHz) ideal for Automated Test Equipment (ATE) and other measurement applications. These switches are suitable for defense, industrial, and telecommunication applications.

Example of P/N: R573103600 is a SP6T N up to 12.4 GHz, Normally Open, 28 Vdc, and solder pins.

PART NUMBER SELECTION

R57 ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

SERIES PREFIX

MODEL
3: Without 50 Ω termination
4: With 50 Ω termination

RF CONNECTORS
0: N up to 3 GHz [10]
1: N up to 12.4 GHz [8 & 10]
2: BNC up to 3 GHz [3 & 4]
5: TNC up to 3 GHz [3 & 4]
6: TNC up to 12.4 GHz [3 & 4]

TYPE
0: Normally open
1: Normally open I.C.
2: Latching
3: Latching + I.C.
4: Latching + S.C.O. [1 & 3]
5: Latching + S.C.O. + I.C. [1 & 3]
8: Latching + S.C.O. + A.R. [1]
9: Latching + S.C.O. + I.C. + A.R. [1]

ACTUATOR VOLTAGE
2: 12 Vdc
3: 28 Vdc

NUMBER OF POSITIONS
3: 3 positions
4: 4 positions
5: 5 positions
6: 6 positions
8: 8 positions [4]
0: 10 positions [4]
2: 12 positions [4]

OPTIONS[11]
0: Without option
1: Positive common [5]
2: Compatible TTL driver [1, 7 & 9]
3: With suppression diodes
4: With suppression diodes and positive common [5]
8: BCD TTL driver compatible [1, 2, 6 & 7]

ACTUATOR TERMINALS
0: Solder pins
5: D-Sub connector

Notes

I.C.: Indicator contact / S.C.O.: Self Cut-Off / A.R.: Auto Reset
Standard products are equipped with negative common
1. These models are already equipped with suppression diodes
2. Latching BCD driver enables also a global reset through driver code 0000 (see BCD logic coding page 1-11)
3. Available only up to 6 positions
4. Model "3" only
5. Available only for type 0, 1, 2 and 3
6. Available only with type 0, 1, 8 and 9
7. Polarity is not relevant to application for switches with TTL driver
8. 8, 10 & 12 positions are available only up to 8 GHz
9. For 8, 10 & 12 positions, this option is only available with type 0, 1, 8 and 9
10. For 8, 10 & 12 positions, this connector is only available without 50 Ω termination
11. For precisions see availabilty of options chart page 5-39

GENERAL SPECIFICATIONS

Type 2, 3, 4 and 5:
Latching models have a RESET pin which commands the reset of all positions. This command should be used before switching from one position to another. If not, two positions will be set at the same time.

Note: During the RESET operation, the global current and the nominal operating current are multiplied by the number of positions.


Type 8, 9:
Latching models with AUTOMATIC RESET are available; these products have an internal SET/RESET circuit which automatically resets all the non-selected positions and sets the desired position. This option simplifies the use of latching switches by suppressing the RESET command in switching sequence.

An electronic circuit supplies successively groups of 2, 3 or 4 actuators, in order to limit the maximum current. The current with this option is the total current of 2, 3 or 4 reset coils in the same time (see table below).


Example: During the AUTOMATIC RESET operation, at 28 Vdc, 4 position switch has a temporary consumption of only 250 mA, during 40 ms maximum.

SWITCHING SEQUENCE

FOR SP3T

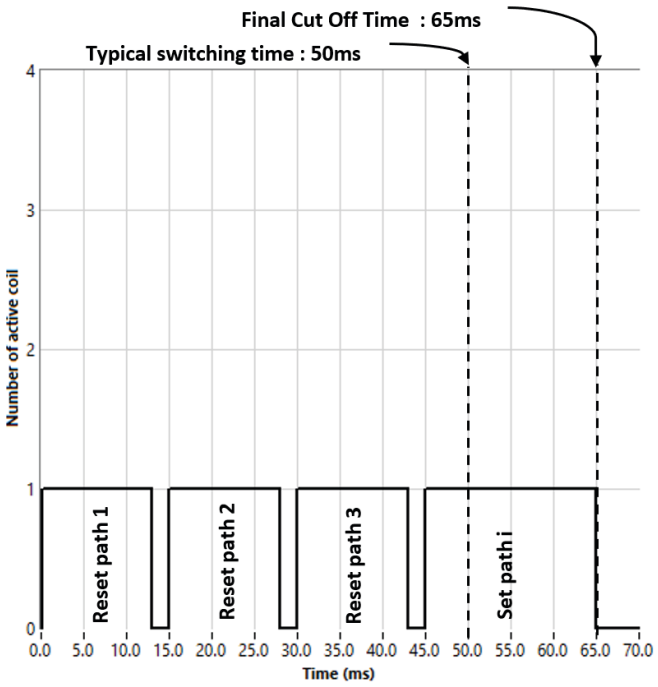

FOR SP4T

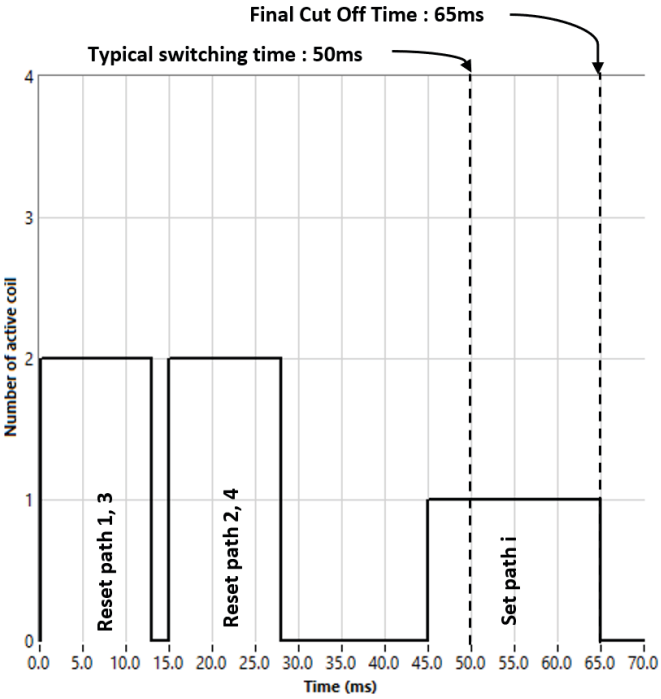

OPERATING TOTAL CURRENT AT 23 °C (mA) SPnT LATCHING


NUMBER OF POSITIONS	12 VOLTS		28 VOLTS	
	MANUAL RESET	AUTOMATIC RESET	MANUAL RESET	AUTOMATIC RESET
3	320 × n	320 mA	125 × n	125 mA
	960 mA		375 mA	

OPERATING TOTAL CURRENT AT 23 °C (mA) SPnT LATCHING

NUMBER OF POSITIONS	12 VOLTS		28 VOLTS	
	MANUAL RESET	AUTOMATIC RESET	MANUAL RESET	AUTOMATIC RESET
4	320 × n	640 mA	125 × n	250 mA
	1280 mA		500 mA	

Notes
n = number of positions
Availability of options according to both type and number of positions


FOR SP5T

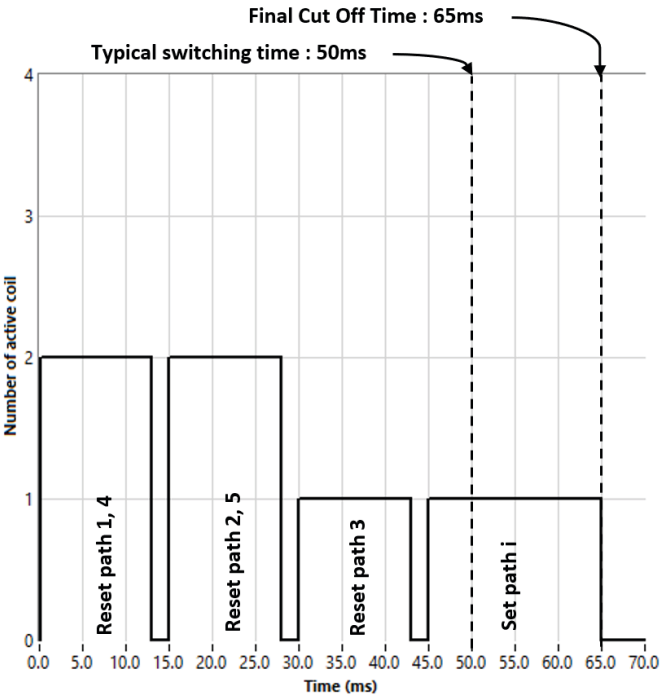

OPERATING TOTAL CURRENT AT 23 °C (mA) SPnT LATCHING

NUMBER OF POSITIONS	12 VOLTS		28 VOLTS	
	MANUAL RESET	AUTOMATIC RESET	MANUAL RESET	AUTOMATIC RESET
5	320 × n	640 mA	125 × n	250 mA
	1600 mA		625 mA	

FOR SP6T

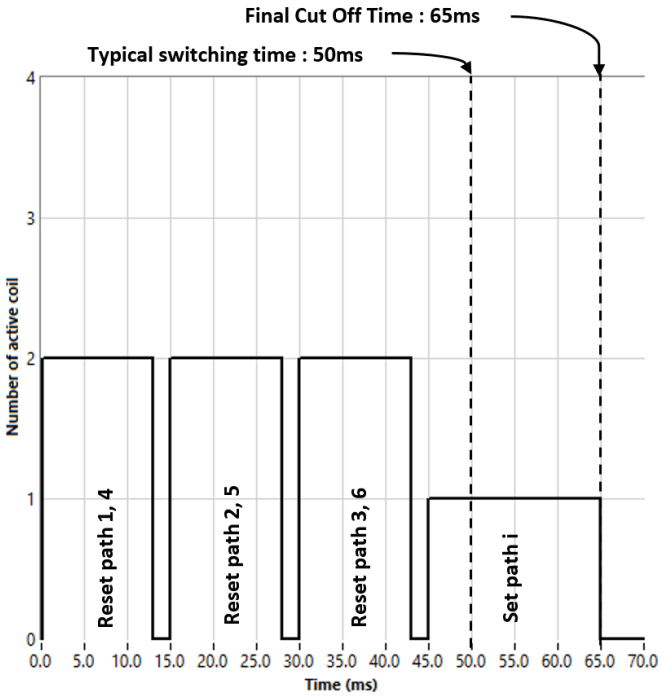

OPERATING TOTAL CURRENT AT 23 °C (mA) SPnT LATCHING


NUMBER OF POSITIONS	12 VOLTS		28 VOLTS	
	MANUAL RESET	AUTOMATIC RESET	MANUAL RESET	AUTOMATIC RESET
6	320 × n	640 mA	125 × n	250 mA
	1920 mA		750 mA	

Notes


n = number of positions

Availability of options according to both type and number of positions

FOR SP8T

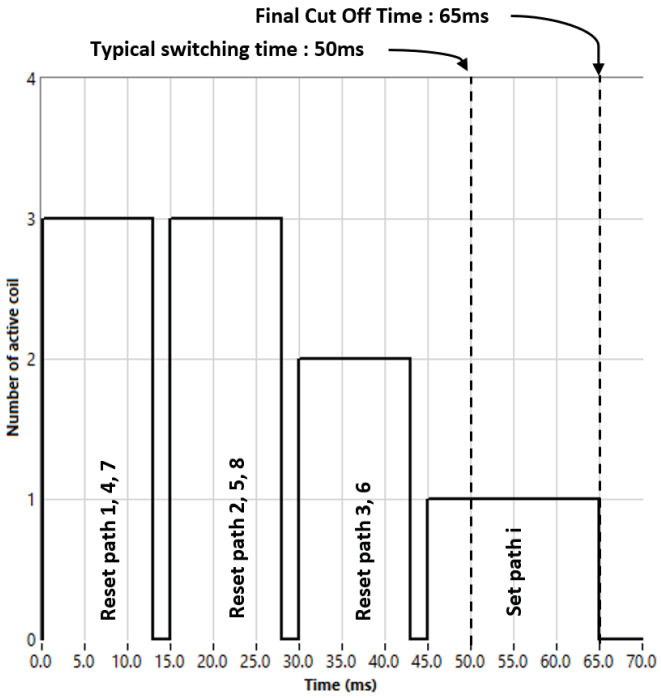

FOR SP10T

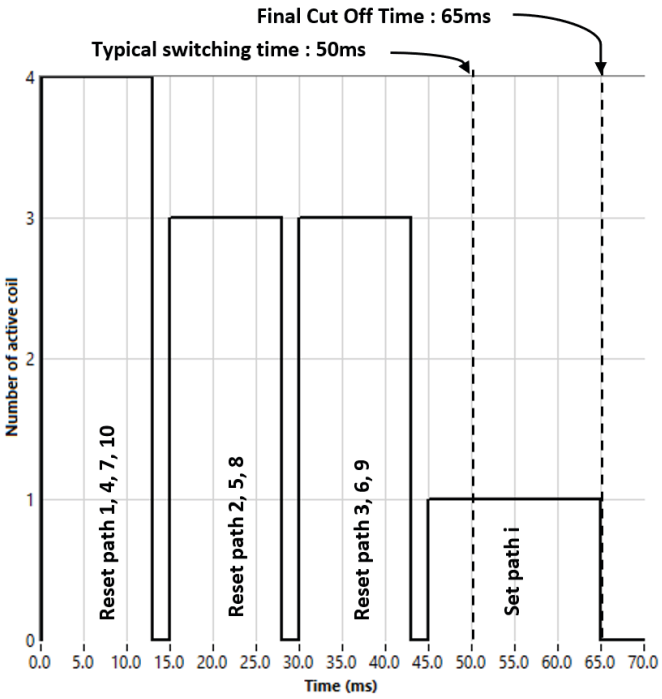

OPERATING TOTAL CURRENT AT 23 °C (mA) SPnT LATCHING

NUMBER OF POSITIONS	12 VOLTS		28 VOLTS	
	MANUAL RESET	AUTOMATIC RESET	MANUAL RESET	AUTOMATIC RESET
8	320 × n	960 mA	125 × n	375 mA
	2560 mA		1000	

OPERATING TOTAL CURRENT AT 23 °C (mA) SPnT LATCHING


NUMBER OF POSITIONS	12 VOLTS		28 VOLTS	
	MANUAL RESET	AUTOMATIC RESET	MANUAL RESET	AUTOMATIC RESET
10	320 × n	1280 mA	125 × n	500 mA
	3200 mA		1250	

Notes

n = number of positions

Availability of options according to both type and number of positions

FOR SP12T

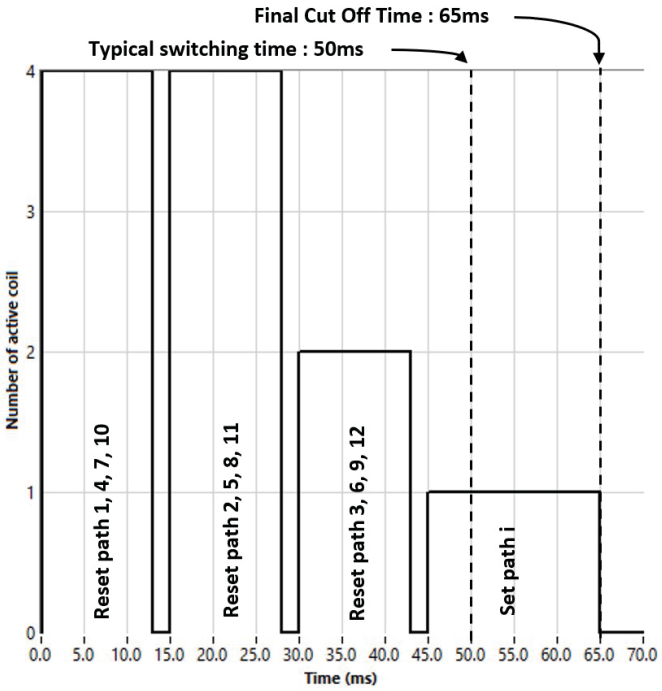

OPERATING TOTAL CURRENT AT 23 °C (mA) SPnT LATCHING

NUMBER OF POSITIONS	12 VOLTS		28 VOLTS	
	MANUAL RESET	AUTOMATIC RESET	MANUAL RESET	AUTOMATIC RESET
12	320 × n 3840 mA	1280 mA	125 × n 1500 mA	500 mA

Notes

n = number of positions

Availability of options according to both type and number of positions

GENERAL SPECIFICATIONS

OPERATING MODE		NORMALLY OPEN		LATCHING	
Nominal operating voltage (across operating temperature)	Vdc	12 (10.2/13)	28 (24/30)	12 (10.2/13)	28 (24/30)
Coil resistance (+/-10%)	Ω	47.5	275	See tables on previous pages	
Nominal operating current at 23 °C	mA	250	102		
Average power		See Power Rating Chart page 1-13			
TTL input	High Level	2.2 to 5.5 V (TTL Option)			
		3.5 to 5.5 V (BCD Option)	800 µA max 5.5 volts		
	Low Level	0 to 0.8 V (TTL Option)			
		0 to 1.5 V (BCD Option)	20 µA max 0.8 volts		
Indicator rating		1 W/30 V/100 mA			
Switching time (max)	ms	15 ms For automatic reset models: SP3T to SP12T = 25 ms			
Life	Non-terminated SP3 to 6T (R573 series)	2 million cycles			
	Terminated SP3 to 6T (R574 series)				
	SP8, 10 & 12T (all models)				
Connectors		N - TNC - BNC			
Actuator terminals		Solder pins or male 25 pin D-Sub connector			
Operating temperature range		-40 °C to +85 °C			
Storage temperature range		-55 °C to +85 °C			
Vibration (MIL STD 202, method 204D, cond.C)		10 - 2000 Hz, 10 g	Operating		
Shock (MIL STD 202, method 213B, cond.C)		50 g/1 ms, 1/2 sine	Operating		

RF PERFORMANCE

N - TNC - BNC Connector

NUMBER OF POSITIONS	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	IMPEDANCE Ω
3 to 6	DC - 12.4	DC - 3	1.20	0.20	80	50
		3 - 8	1.35	0.35	70	
		8 - 12.4	1.50	0.50	60	
8 & 10	DC - 8	DC - 3	1.30	0.30	80	
		3 - 8	1.50	0.50	70	
12	DC - 8	DC - 3	1.35	0.50	70	
		3 - 8	1.70	1.00	60	


Notes

See page 5-23 for typical RF performance.


R573 & R574 TYPICAL PERFORMANCE

Example: SP6T N up to 12.4 GHz

INSERTION LOSS & ISOLATION

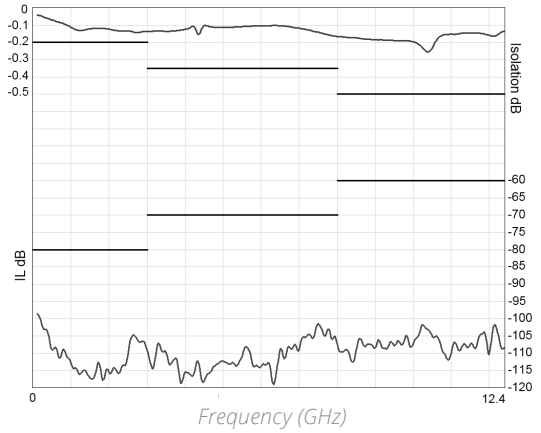


V.S.W.R

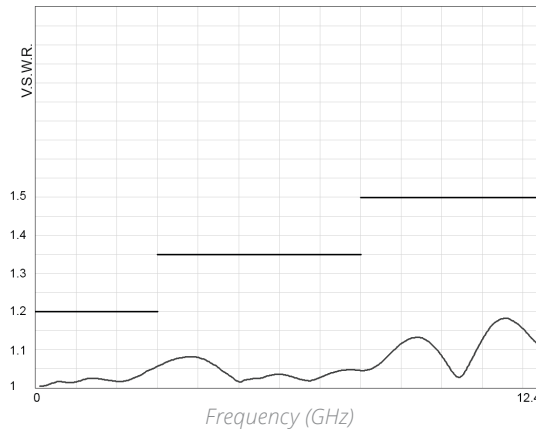


Example: SP6T TNC up to 12.4 GHz

INSERTION LOSS & ISOLATION

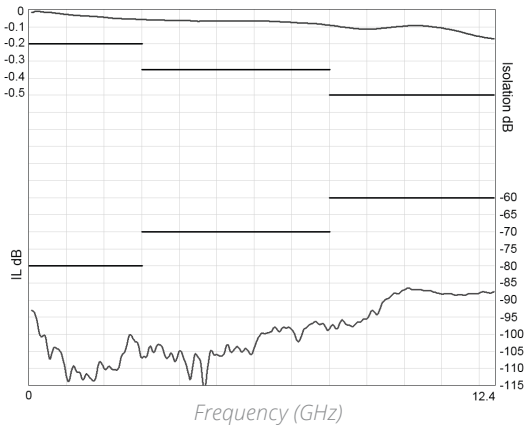


V.S.W.R

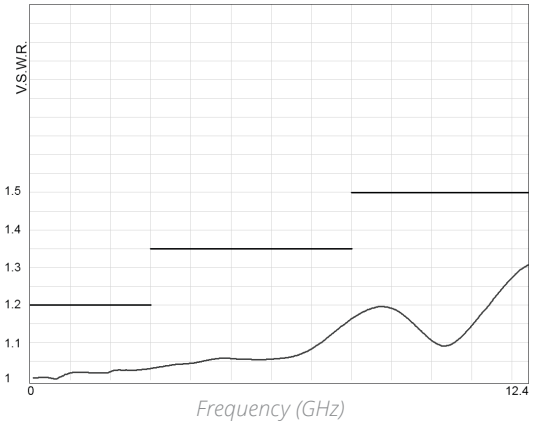


Example: SP8T up to 8 GHz

INSERTION LOSS & ISOLATION

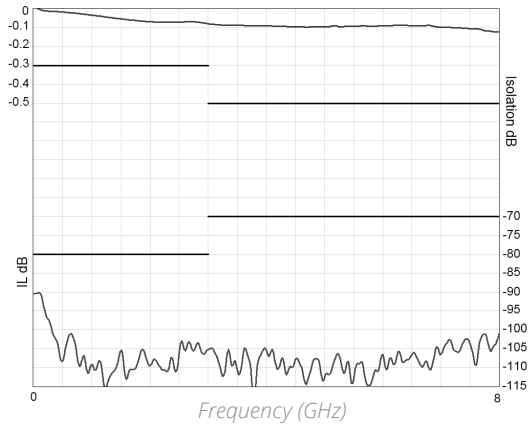


V.S.W.R

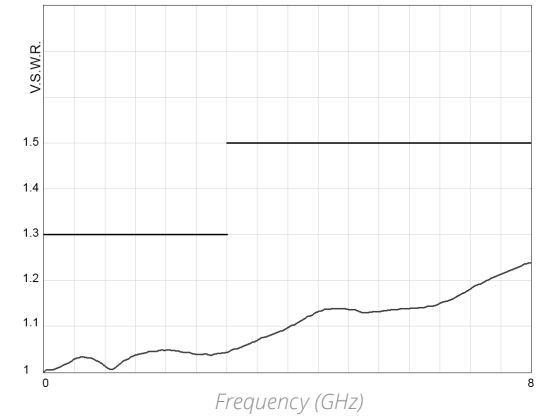

TYPICAL OUTLINE DRAWINGS


Terminated or non-terminated 3 to 12 positions

8 POSITIONS 8 GHz WITH SOLDER PINS MODEL

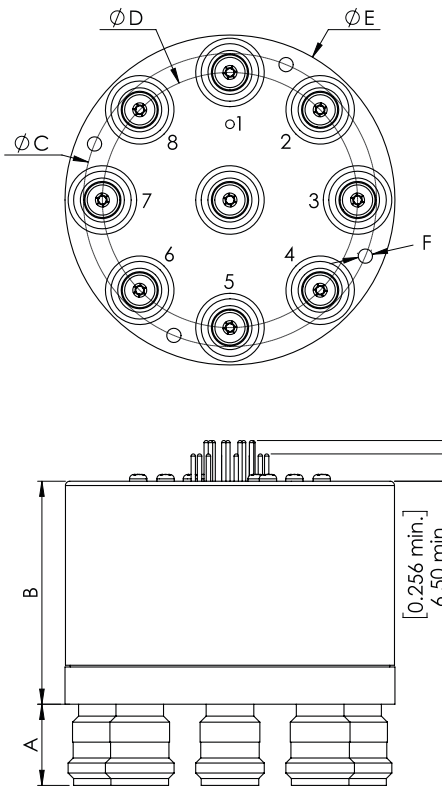

CONNECTORS	A MAX (mm [INCHES])
N	19.5 [0.748]
BNC	12.5 [0.472]
TNC	12.5 [0.472]

10 POSITIONS 8 GHz WITH D-SUB CONNECTOR MODEL

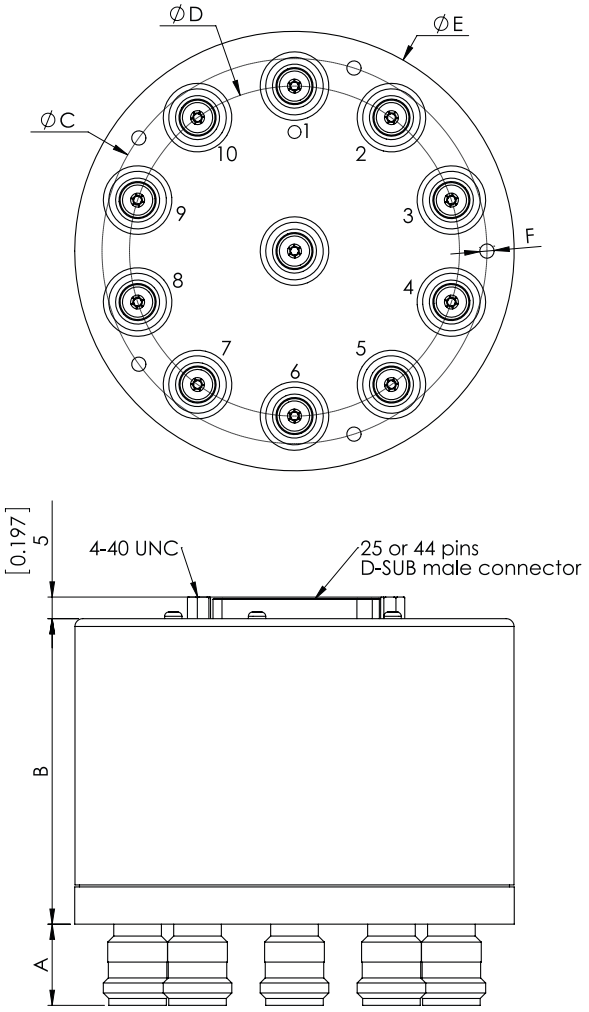

TYPE	B MAX (mm [INCHES])	
	SOLDER PINS	D-SUB CONNECTOR
Type 0 - 1 - 2 or 3 with option 0 - 1 - 3 or 4	56 [2.205]	66 [2.598]
Type 0 - 1 - 2 or 3 with option 2 or 8	71 [2.80]	71 [2.80]
Type 4 - 5 - 8 or 9 with option 0 - 1 - 2 or 8		

NUMBER OF POSITIONS	C DIAMETER	D DIAMETER	E DIAMETER	F
3 - 6	54 [2.126]	44.7 [1.732]	63.5 [2.480]	6 holes M4/60°
8	67.7 [2.738]	58.9 [2.283]	76.2 [2.99]	4 holes M4/90°
10	88.9 [3.465]	76.2 [2.992]	101.6 [3.976]	5 holes M4/72°
12	67.7 [2.738]	101.6 [3.976]	127 [5]	6 holes M4/60°

Notes




All dimensions are in millimeters [inches].

RF CONNECTOR ALLOCATION FOR SPnT SERIES




ALL CONNECTORS

Connectors A: 1.6/5.6, QMA, SMA, SMA 2.9, 2.4 mm & 1.85 mm
Other Connectors: N, BNC, TNC




SPnT 3 WAYS

NON-TERMINATED VERSION		TERMINATED VERSION
Up to 40 GHz models Without option Connectors A (except 2.4 mm & 1.85 mm)	Up to 40 GHz models With option Connectors A and other connectors (except 2.4 mm & 1.85 mm)	18 GHz, 26.5 GHz and 40 GHz models with SMA - SMA 2.9
		

SPnT 4 WAYS

NON-TERMINATED VERSION		TERMINATED VERSION
Up to 67 GHz models Without option Connectors A	Up to 67 GHz models With option Connectors A and other connectors	18 GHz, 26.5 GHz, 40 GHz, 50 GHz and 67 GHz models with SMA - SMA 2.9 - 2.4 mm & 1.85 mm
		




SPnT 5 WAYS

NON-TERMINATED VERSION		TERMINATED VERSION
Up to 40 GHz models Without option Connectors A (except 2.4 mm & 1.85 mm)	Up to 40 GHz models With option Connectors A and other connectors (except 2.4 mm & 1.85 mm)	18 GHz, 26.5 GHz and 40 GHz models with SMA - SMA 2.9
		




RAMSES Series

Connectors A: 1.6/5.6, QMA, SMA, SMA 2.9, 2.4 mm & 1.85 mm
Other Connectors: N, BNC, TNC




SPnT 6 WAYS

NON-TERMINATED VERSION		TERMINATED VERSION
Up to 67 GHz models Without Option Connectors A	Up to 67 GHz models With Option Connectors A and other connectors	18 GHz, 26.5 GHz, 40 GHz, 50 GHz and 67 GHz models with SMA - SMA 2.9 - 2.4 mm & 1.85 mm
		




SPnT 8 WAYS

NON-TERMINATED VERSION		TERMINATED VERSION
18 GHz, 26.5 GHz and 40 GHz models SMA and SMA 2.9 connectors	3 GHz and 12.4 GHz models N connectors	18 GHz, 26.5 GHz and 40 GHz models SMA and SMA 2.9 connectors
		

SPnT 10 WAYS

NON-TERMINATED VERSION		TERMINATED VERSION
18 GHz and 22 GHz models SMA connectors	3 GHz and 8 GHz models N connectors	18 GHz and 22 GHz models SMA connectors
		

SPnT 12 WAYS

NON-TERMINATED VERSION		TERMINATED VERSION
12.4 GHz and 18 GHz models SMA connectors	3 GHz and 8 GHz models N connectors	12.4 GHz and 18 GHz models SMA connectors
		


COAXIAL SPnT - ACCESSORIES

PRINTED CIRCUIT BOARD INTERFACE CONNECTOR

A printed circuit board interface connector (ordered separately) has been designed for easy mounting on terminals


For SPnT model R523, R573 and R524, R574 series: Radiall part number: **R599 906 000 for 3 to 6 positions, R599 908 000 for 8 positions, R599 900 000 for 10 positions, and R599 902 000 for 12 positions.**

R599906000

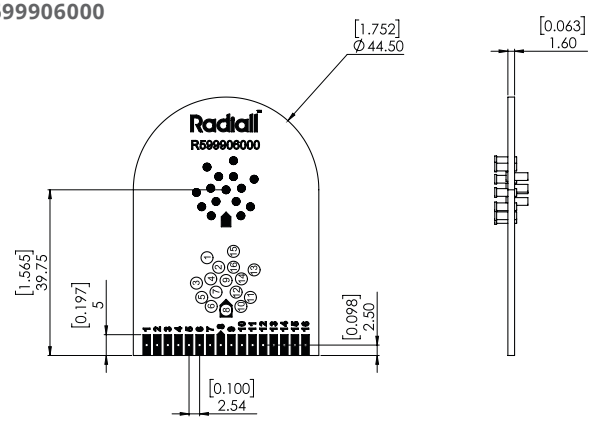


(Ø0.8 [0.031] metallized holes, double side tracks)

R599902000

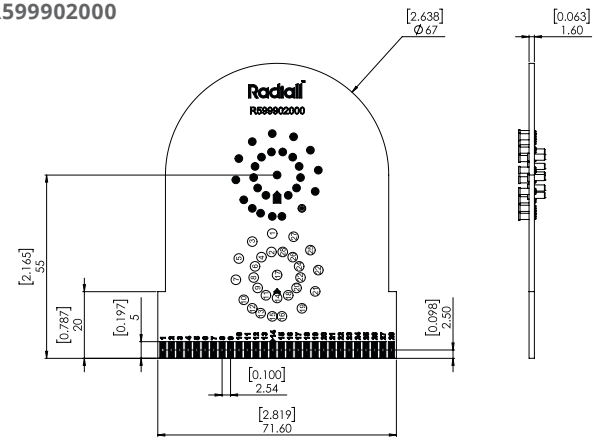


(Ø0.8 [0.031] metallized holes, double side tracks)

R599908000

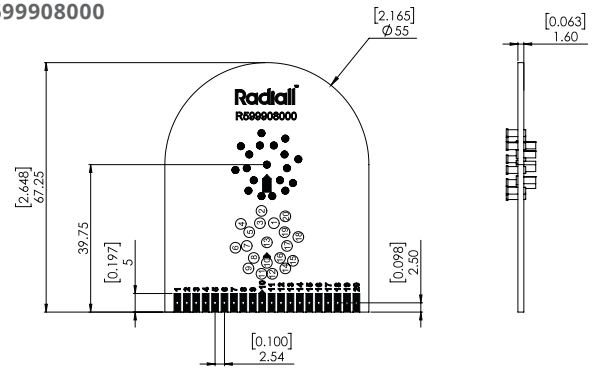

(Ø0.8 [0.031] metallized holes, double side tracks)

R599900000

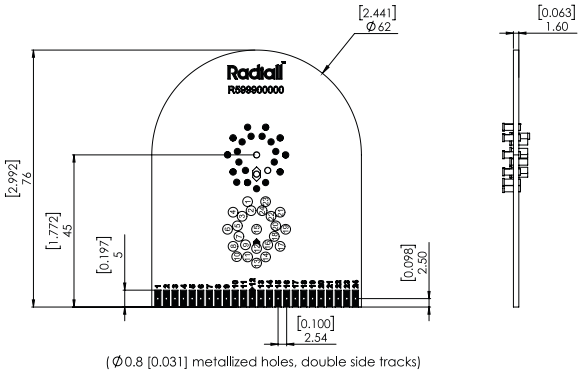

(Ø0.8 [0.031] metallized holes, double side tracks)





Mounting Bracket


Two different metal brackets have been designed for an easy mechanical mounting of our SPnT switches with a circular flange for customer installation. These brackets must be ordered separately and assembled according to our recommended process on the Technical Data Sheets.


MODEL WITH SCREWS (R599320000)

Brackets only applicable for the 3 to 6 positions non-terminated with options.

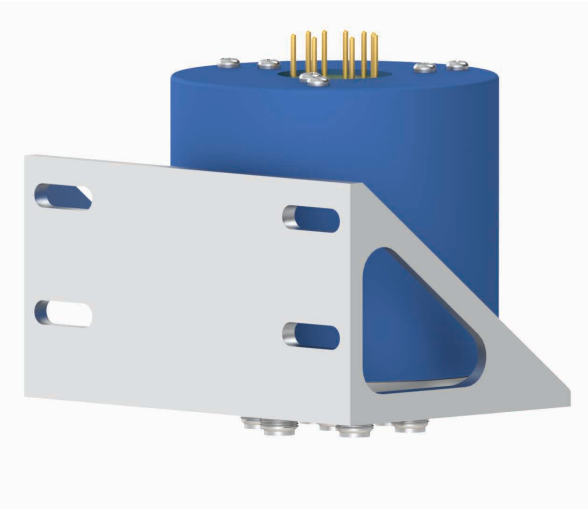

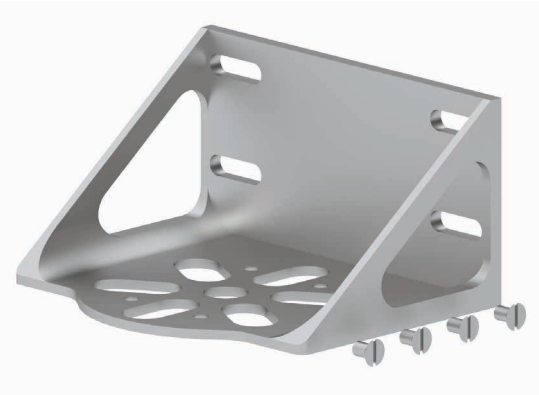

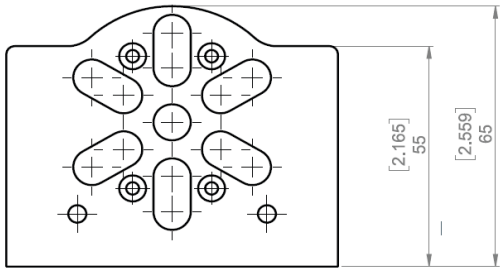

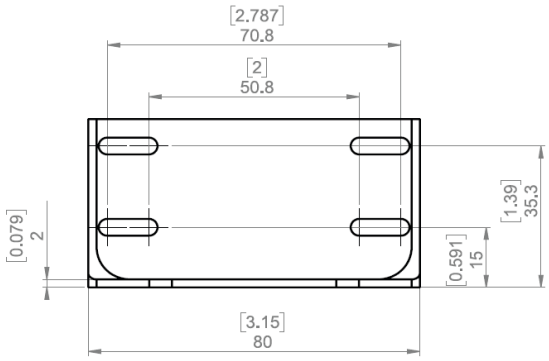

Notes

All dimensions are in millimeters [inches].
For assembling process please see Technical Data Sheet.


MOUNTING SQUARE FLANGE

A square flange has been designed for easy mechanical mounting of our SPnT switches with a circular flange for customer installation. These flanges must be ordered separately (similar to the mounting bracket) and assembled according to our recommended process on the following page.


Square flange applicable for the 3 to 6 positions non-terminated SMA connector with options.




TYPICAL OUTLINE DRAWING

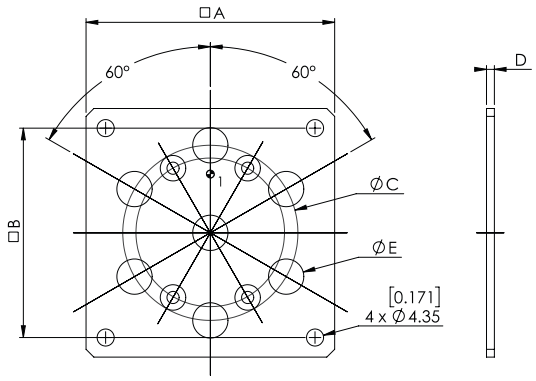

Square flange applicable for the 3 to 6 positions N connector.

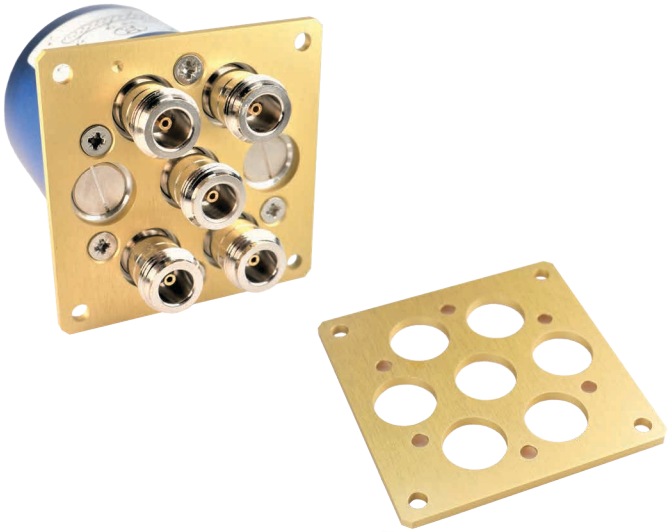

TYPICAL OUTLINE DRAWING

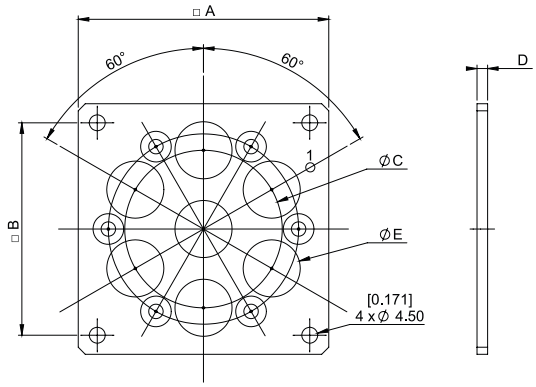

MATERIAL: ALUMINIUM WITH CR3 PASSIVATION

RADIALL PART NUMBER	A (mm [INCHES])	B (mm [INCHES])	C (mm [INCHES])	D (mm [INCHES])	E (mm [INCHES])
R599 308 000	57.15 [2.244]	45.75 [1.772]	27 [1.063]	2 [0.079]	9 [0.354]
R599 310 000	63.45 [2.480]	53.45 [2.087]	27 [1.063]	2 [0.079]	9 [0.354]
R599 315 000	71.10 [2.795]	60.30 [2.362]	44.70 [1.732]	3 [0.118]	16.20 [0.630]

FOR MODELS WITH CONNECTORS SMA, QMA, SMA 2.9, 1.85 mm, 2.4 mm, DIN 1.6/5.6


NUMBER OF POSITIONS	MODEL	PART NUMBER
3 to 6 positions non-terminated with options	R573 series	R599310000
		R599308000

FOR MODELS WITH CONNECTORS N, TNC, BNC


NUMBER OF POSITIONS	MODEL	PART NUMBER
3 to 6 positions	R573 series	R599315000
	R574 series	

D-SUB CONNECTOR LOCATION

R573
3 to 6 positions
Non- terminated SMA connector

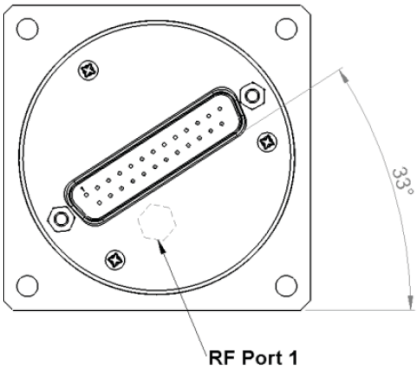

R573
3 to 6 positions
N connector

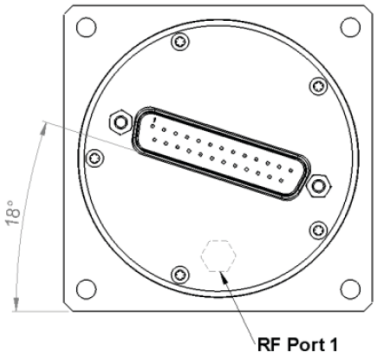


Notes
All dimensions are in millimeters [inches]. For assembling process please see Technical Data Sheet.

COAXIAL SPnT - ELECTRICAL SCHEMATICS


R573-R523 / R524-R574 SERIES

NORMALLY OPEN


WITHOUT OPTION
R5-3-0--0- / R5-4-0--0-

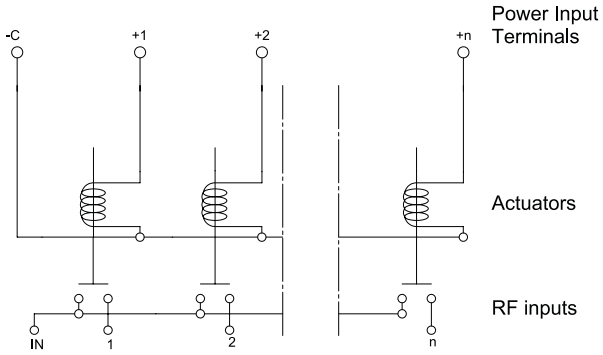


WITH INDICATOR CONTACT
R5-3-1--0- / R5-4-1--0-

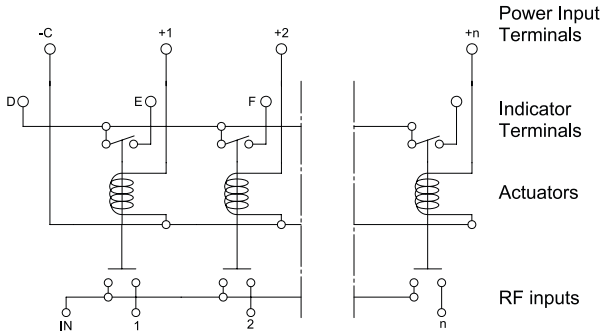


WITH SUPPRESSION DIODES
R5-3-0--3- / R5-4-1--3-

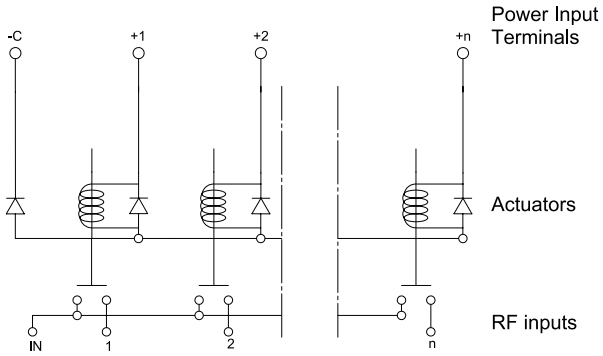


WITH SUPPRESSION DIODES & INDICATOR CONTACT
R5-3-1--3- / R5-4-1--3-

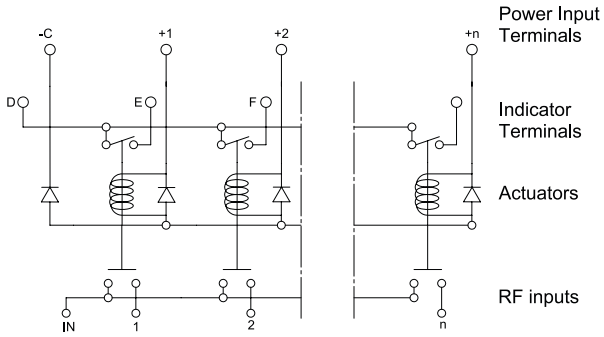

WITH TTL DRIVER (SUPRESSION DIODES ARE INCLUDED)
R5-3-0--2- / R5-4-0--2-

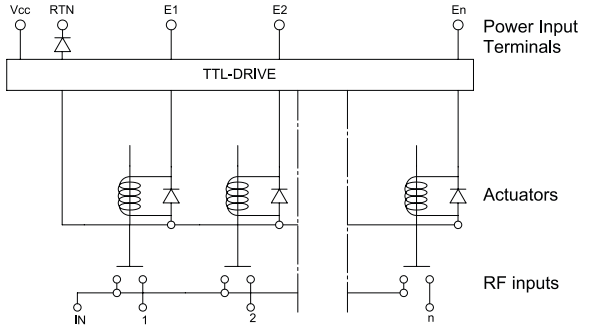


WITH TTL DRIVER & INDICATOR CONTACT (SUPRESSION DIODES ARE INCLUDED)
R5-3-1--2- / R5-4-1--2-

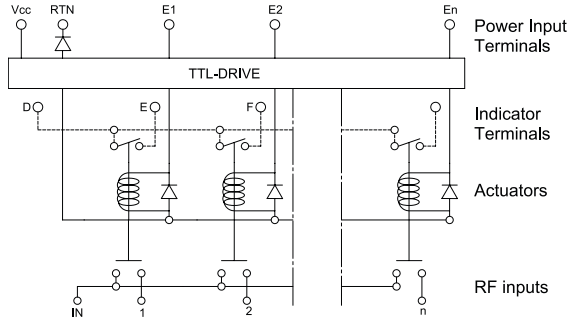


R573-R523 / R524-R574 SERIES

NORMALLY OPEN


WITH BCD DRIVER, TTL COMPATIBLE (SUPPRESSION DIODES ARE INCLUDED)
R5-3-0--8- / R5-4-0--8-

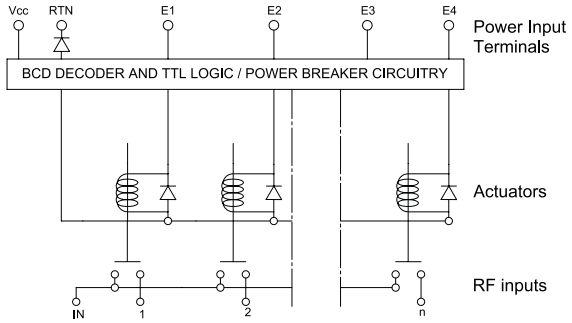


WITH BCD DRIVER, TTL COMPATIBLE & INDICATOR CONTACT (SUPPRESSION DIODES ARE INCLUDED)
R5-3-1--8- / R5-4-1--8-

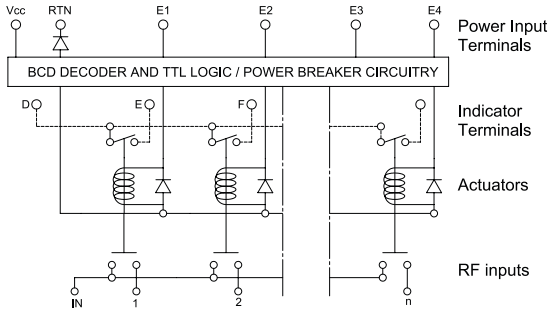


WITH POSITIVE COMMON
R5-3-0--1- / R5-4-0--1-

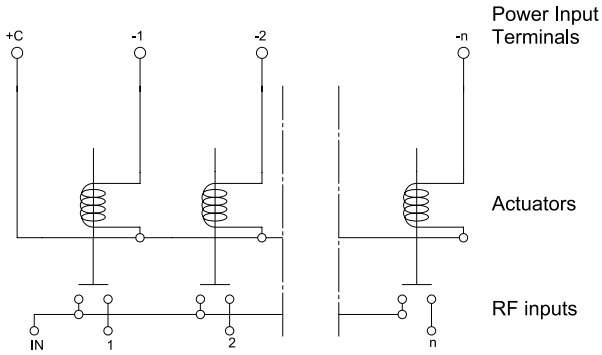


WITH POSITIVE COMMON AND INDICATOR CONTACT
R5-3-1--1- / R5-4-1--1-

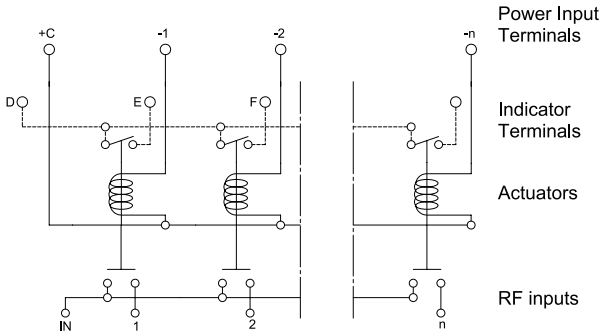

WITH POSITIVE COMMON AND SUPPRESSION DIODES
R5-3-0--4- / R5-4-0--4-

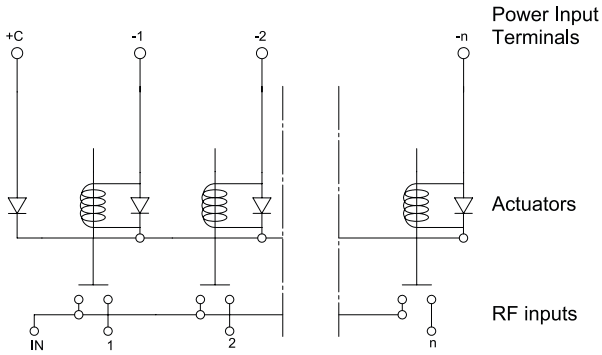

WITH POSITIVE COMMON, SUPPRESSION DIODES & INDICATOR CONTACT
R5-3-1--4- / R5-4-1--4-

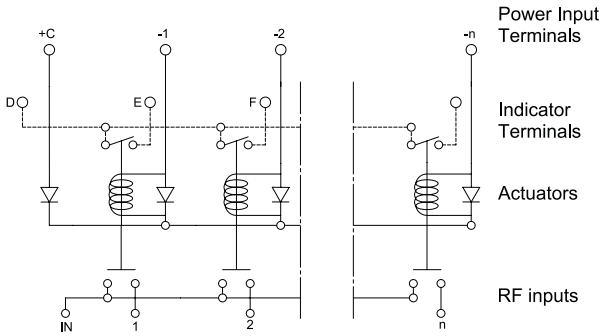


Accessories SPnT & Electrical Schematics


R573-R523 / R524-R574 SERIES

LATCHING


WITHOUT OPTION
R5-3-2--0- / R5-4-2--0-

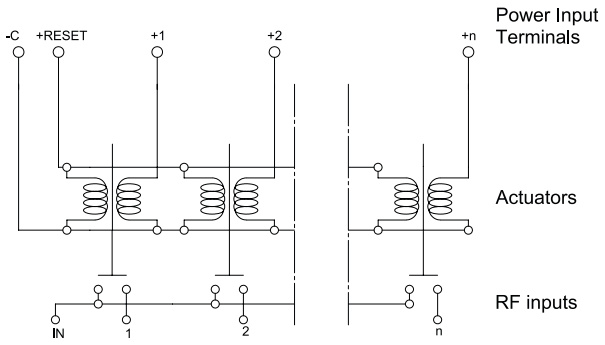


WITH INDICATOR CONTACT
R5-3-3--0- / R5-4-3--0-

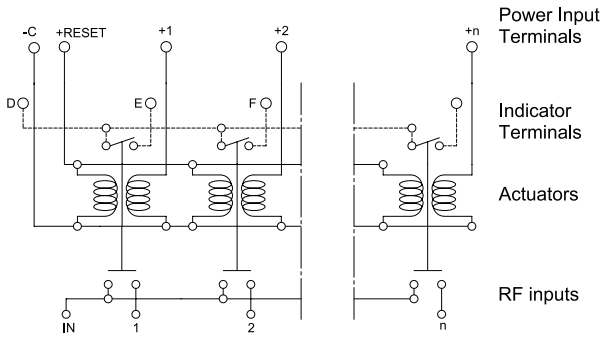


WITH SUPPRESSION DIODES
R5-3-2--3- / R5-4-2--3-

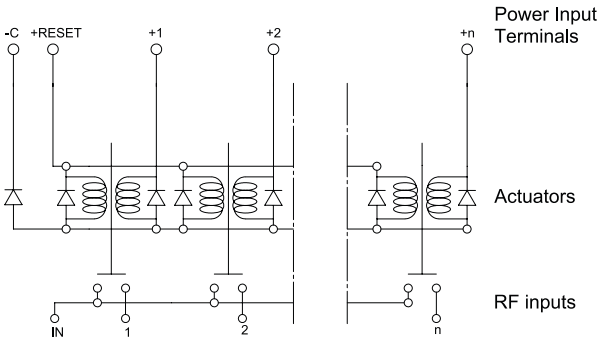


WITH SUPPRESSION DIODES AND INDICATOR CONTACT
R5-3-3--3- / R5-4-3--3-

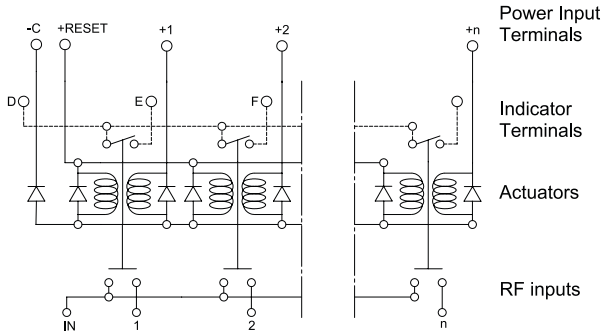

WITH TTL DRIVER (SUPRESSION DIODES ARE INCLUDED)
R5-3-2--2- / R5-4-2--2-

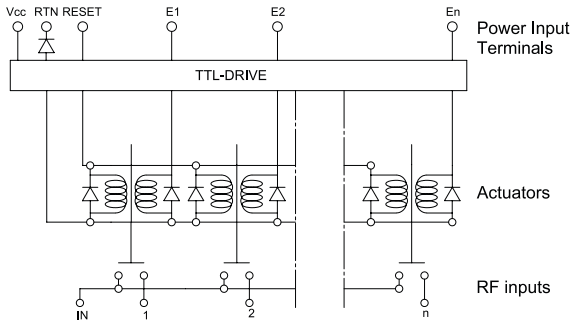

WITH TTL DRIVER & INDICATOR CONTACT (SUPRESSION DIODES ARE INCLUDED)
R5-3-3--2- / R5-4-3--2-

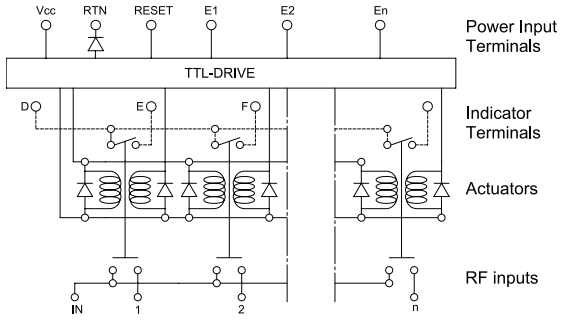


Accessories SPnT & Electrical Schematics


R573-R523 / R524-R574 SERIES

LATCHING


WITH CUT-OFF (SUPPRESSION DIODES ARE INCLUDED)
R5-3-4--0- / R5-4-4--0-

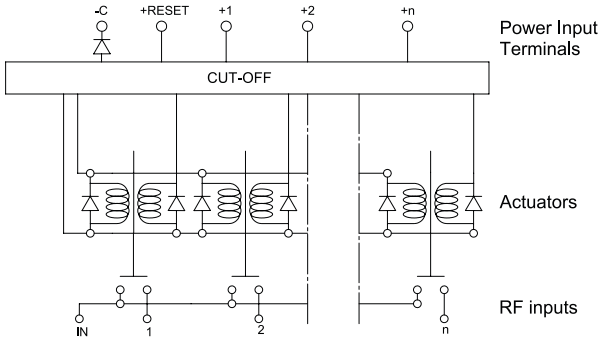


WITH CUT-OFF AND INDICATOR CONTACT (SUPPRESSION DIODES ARE INCLUDED)
R5-3-5--0- / R5-4-5--0-

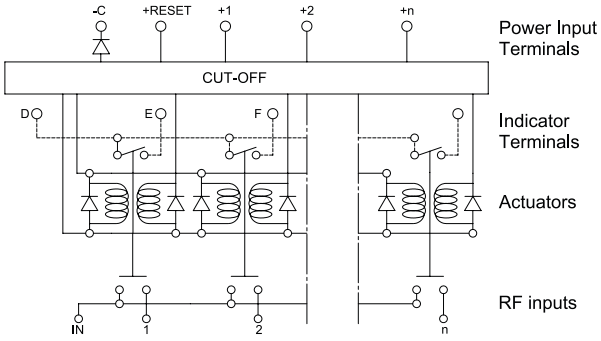


WITH CUT-OFF & AUTO REST (SUPPRESSION DIODES ARE INCLUDED)
R5-3-8--0- / R5-4-8--0-

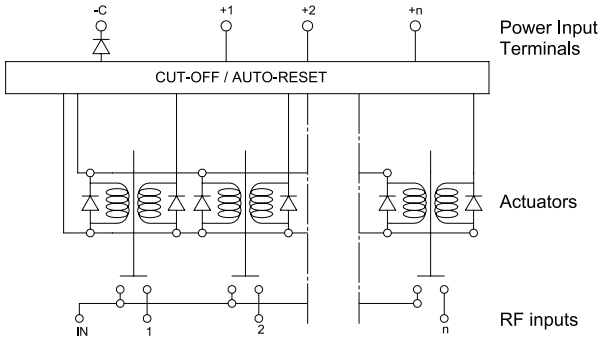


WITH CUT-OFF, AUTO REST & INDICATOR CONTACT (SUPPRESSION DIODES ARE INCLUDED)
R5-3-9--0- / R5-4-9--0-

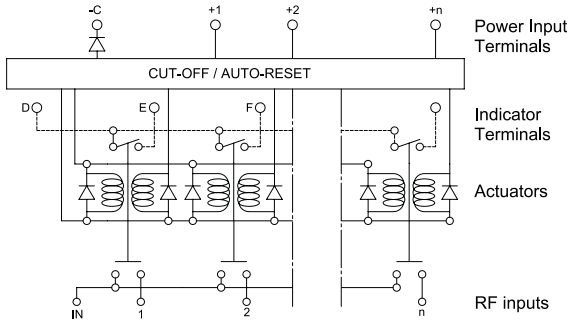

WITH TTL DRIVER AND CUT-OFF (SUPPRESSION DIODES ARE INCLUDED)
R5-3-4--2- / R5-4-4--2-

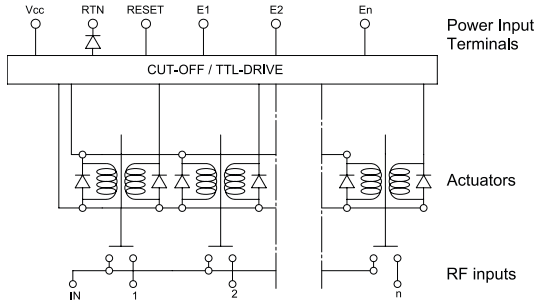


WITH TTL DRIVER, CUT-OFF & INDICATOR CONTACT (SUPPRESSION DIODES ARE INCLUDED)
R5-3-5--2- / R5-4-5--2-

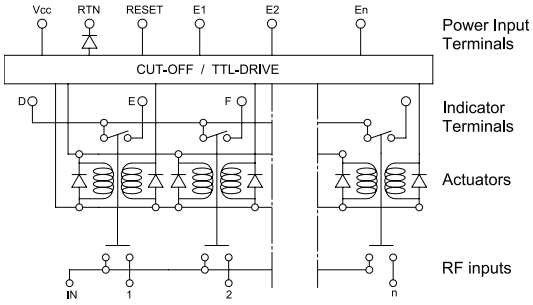


R573-R523 / R524-R574 SERIES

LATCHING


WITH TTL DRIVER, CUT-OFF & AUTO RESET (SUPPRESSION DIODES ARE INCLUDED)
R5-3-8--2- / R5-4-8--2-

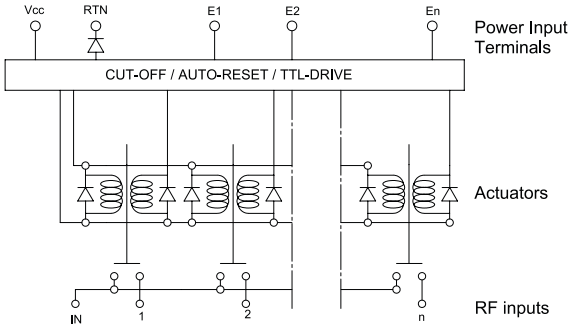


WITH TTL DRIVER, CUT-OFF, AUTO RESET & INDICATOR CONTACT (SUPPRESSION DIODES ARE INCLUDED)
R5-3-9--2- / R5-4-9--2-

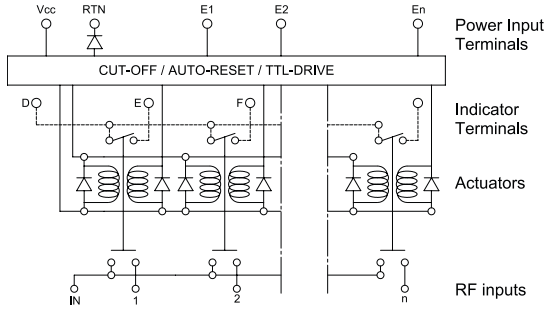


WITH CUT-OFF, FORCE OR AUTO RESET, BCD DRIVER, TTL COMPATIBLE (SUPPRESSION DIODES ARE INCLUDED)
R5-3-8--8- / R5-4-8--8-

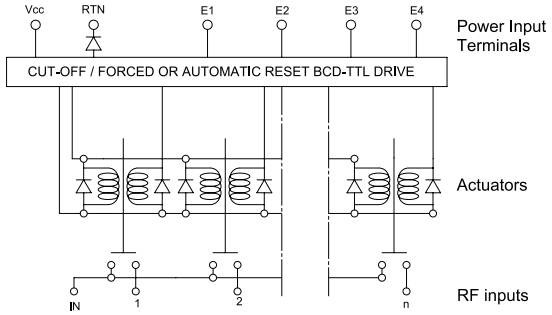


WITH CUT-OFF, FORCE OR AUTO RESET, BCD DRIVER, TTL COMPATIBLE & INDICATOR CONTACT (SUPPRESSION DIODES ARE INCLUDED)
R5-3-9--8- / R5-4-9--8-

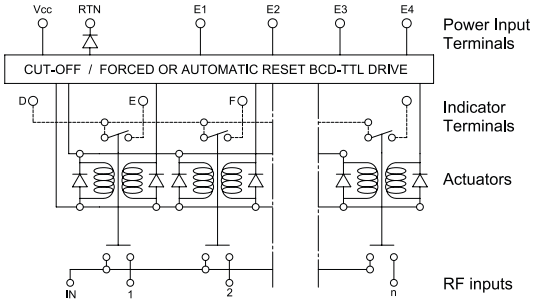

WITH POSITIVE COMMON
R573-2--1- / R574 -2- -1-

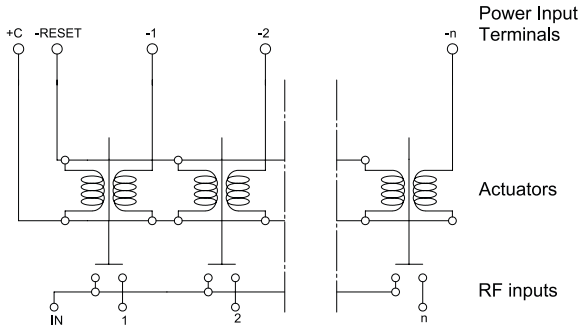


WITH POSITIVE COMMON & INDICATOR CONTACT (SUPRESSION DIODES ARE INCLUDED)
R573-3--1- / R574 -3- -1-

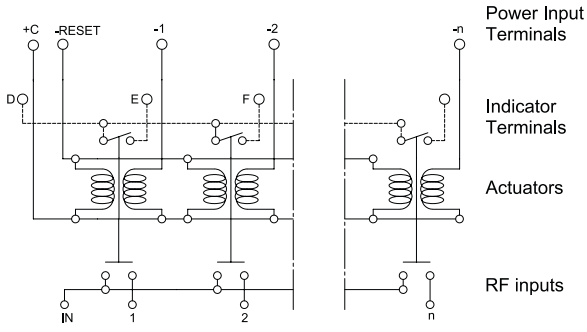


R573-R523 / R524-R574 SERIES

LATCHING


WITH POSITIVE COMMON & SUPPRESSION DIODES (SUPPRESSION DIODES ARE INCLUDED)
R5-3-2--4- / R5-4-2--4-

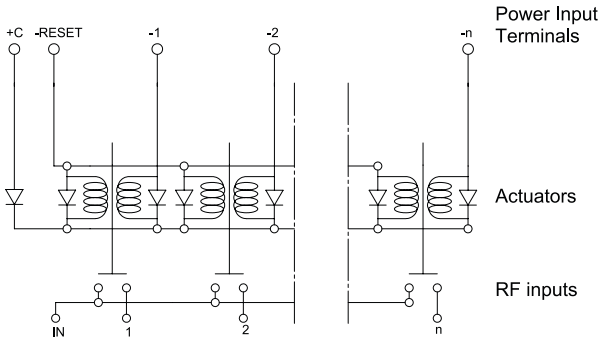


WITH POSITIVE COMMON, SUPPRESSION DIODES & INDICATOR CONTACT
R5-3-3--4- / R5-4-3--4-

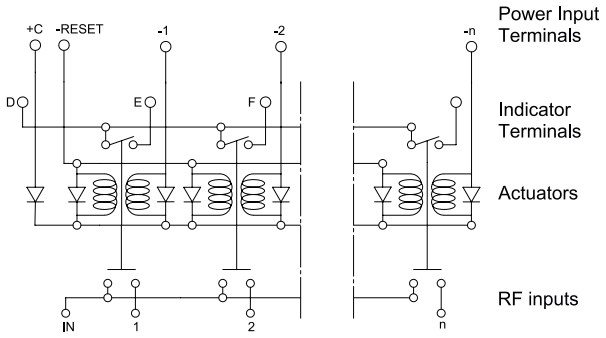

WITH POSITIVE COMMON, CUT-OFF, AUTO RESET
R5-3-8--1- / R5-4-8--1-

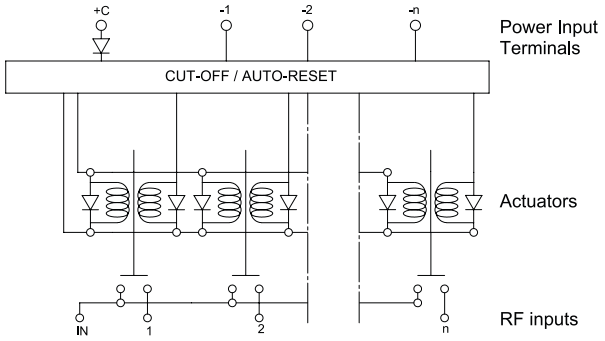


WITH POSITIVE COMMON, CUT-OFF, AUTO RESET & INDICATOR CONTACT
R5-3-9--1- / R5-4-9--1-

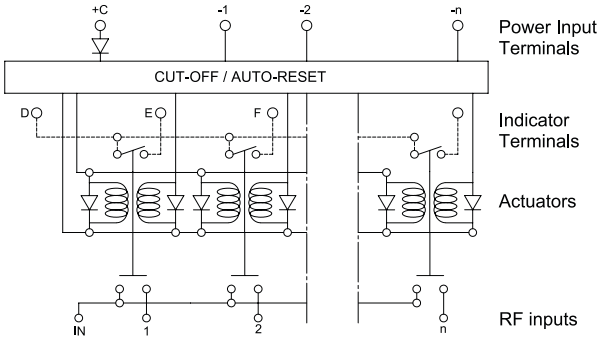

USB SERIES

NORMALLY OPEN WITH INDICATOR CONTACT
R5-3-11--01- / R5-4-11--01-

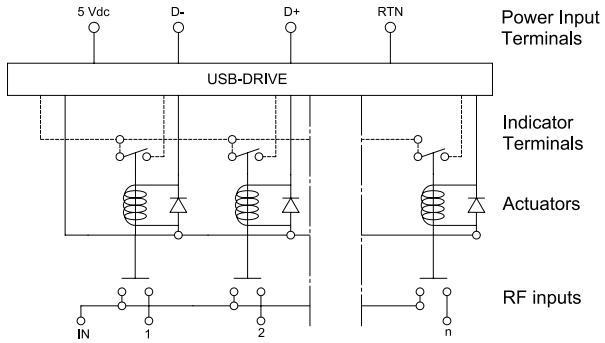

HIGH PERFORMANCE MULTIPORT SWITCHES

SPnT UP TO 40 GHz



Radiall's TITANIUM switches are optimized to perform at a high level over an extended life cycle. With outstanding RF performance, and a guaranteed insertion loss repeatability of 0.03 dB over a life span of 2.5 million switching cycles, Radiall's TITANIUM switches are a perfect solution for automated test and measurement equipment, as well as signal monitoring devices.

Example of P/N: R514F73617 is a SP6T SMA up to 26.5 GHz, Latching, Indicators, Self cut-off, Auto-Reset, 24 Vdc and HE10 receptacle.

PART NUMBER SELECTION

R51

SERIES PREFIX

MODEL
2: Without 50 Ω termination
4: With 50 Ω termination

RF CONNECTORS
2: SMA up to 6 GHz
4: SMA up to 20 GHz
F: SMA up to 26.5 GHz
8: SMA 2.9 up to 40 GHz [1]

TYPE
7: Latching + Self cut-off + Auto Reset + Indicators

ACTUATOR VOLTAGE
3: 24 Vdc

NUMBER OF POSITIONS
4: 4 positions
6: 6 positions

OPTIONS*
1: Positive common (without TTL)
2: TTL/5 V logic with 24 Vdc supply [2]

ACTUATOR TERMINAL
7: HE 10 receptacle, delivered with 750 mm (30 inches) ribbon cable + HE10 connector

DOCUMENTATION
-: Certificate of conformity
C: Calibration certificate
R: Calibration certificate + RF curves

Notes

1. Connector SMA 2.9 is equivalent to "K connector®", registered trademark of Anritsu.
2. Polarity is not relevant to application for switches with TTL driver

Titanium Series

GENERAL SPECIFICATIONS

OPERATING MODE		LATCHING	
Nominal operating voltage (across operating temperature)	Vdc	24 (20/32)	
Coil resistance (+/-10%)	Ω	120	
Operating current at 23 °C	mA	200	
Maximum stand-by current	mA	50	
Average power Terminated Model	All models	RF path Cold switching: See Power page 5-50 Hot switching: 1 Watt Cw	
		Internal terminations 1 Watt average into 50 Ω	
TTL input	High level	3 to 7 V	1.4 mA max at Vcc = Max
	Low level	0 to 0.8 Volts	-
Indicator specifications		Maximum withstanding voltage	60 V
		Maximum current capacity	150 mA
		Maximum "ON" resistance	2.5 Ω
		Minimum "OFF" resistance	100 MΩ
Switching time (max)	ms	15	
Life	SMA	3 million cycles	
	SMA 2.9	2 million cycles	
Connectors		SMA - SMA 2.9	
Actuator terminals		HE10 ribbon receptacle	
Weight (max)	g	230	

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range	-25 °C to +75 °C
Storage temperature range	-55 °C to +85 °C
Temperature cycling (MIL-STD-202, Method 107D, Cond.A)	-55 °C to +85 °C (10 cycles)
Vibration (MIL STD 202, Method 204D, Cond.D)	10 - 2000 Hz, 10 g - operating
Shock (MIL STD 202, Method 213B, Cond.C)	50 g/6 ms, 1/2 sine - operating
Moisture resistance (MIL STD 202, Method 106E, Cond.E)	65 °C, 95% RH, 10 days
Altitude storage (MIL STD 202, Method 105C, Cond.B)	50000 ft (15,240 meters)
RFI (MIL STD 1344, Method 3008 or IEC 61726)	55 dB at 20 GHz
Magnetic field	< 5.10-5 gauss at 1 meter


Titanium Series

RF PERFORMANCE


PART NUMBER		R51-3-34-7 R51-3-36-7	R51-4-34-7 R51-4-36-7		R51-F-34-7 R51-F-36-7		R51-8-34-7 R51-8-36-7	
Frequency Range	GHz	DC to 6	DC to 20		DC to 26.5		DC to 40	
Impedance	Ω	50						
Insertion Loss (max)	dB	0.3 + 0.015 × frequency (GHz)						
Isolation (min)	dB	80	DC to 6 GHz	80	DC to 6 GHz	80	DC to 6 GHz	80
			6 to 12.4 GHz	70	6 to 12.4 GHz	70	6 to 12.4 GHz	70
			12.4 to 20 GHz	65	12.4 to 20 GHz	65	12.4 to 18 GHz	65
			-		20 to 26.5 GHz	60	18 to 26.5 GHz	60
			-		-		26.5 to 40 GHz	55
V.S.W.R. (max)		1.20	DC to 6 GHz	1.20	DC to 6 GHz	1.20	DC to 6 GHz	1.20
			6 to 12.4 GHz	1.35	6 to 12.4 GHz	1.35	6 to 12.4 GHz	1.35
			12.4 to 20 GHz	1.45	12.4 to 20 GHz	1.45	12.4 to 18 GHz	1.45
			-		20 to 26.5 GHz	1.70	18 to 26.5 GHz	1.70
			-		-		26.5 to 40 GHz	1.90
Third order inter Modulation		- 120 dBC typical (2 carriers 20w)						
Repeatability (measured at 25 °C)		0.03 dB					0.05 dB	

TYPICAL RF PERFORMANCE

INSERTION LOSS & ISOLATION

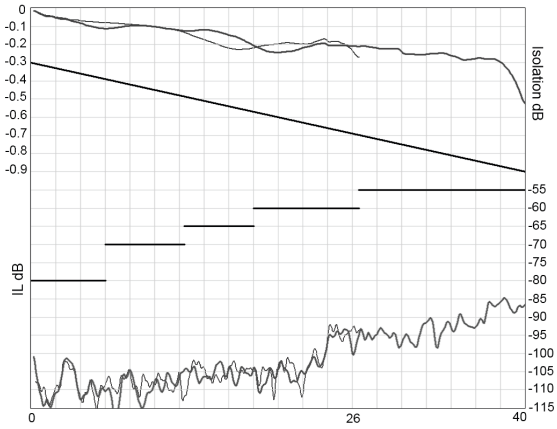


V.S.W.R

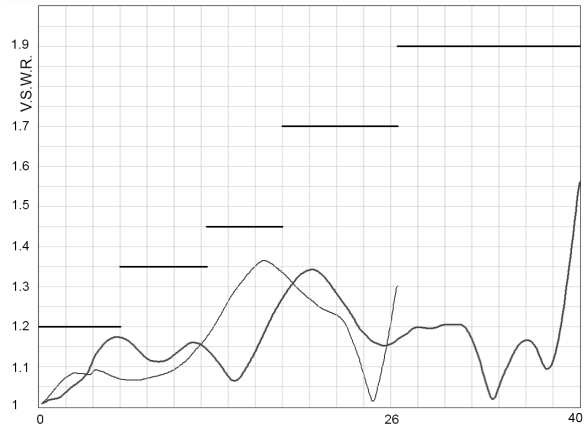

SMA —— **SMA 2.9** ▬

ELECTRONIC POSITION INDICATORS

The electronic position indicators use photo-MOS transistors, which are driven by the mechanical position of the RF paths moving elements. The circuitry consists of a common which can be connected to an output corresponding to a selected RF path. If one or several RF paths are closed, the corresponding indicators are connected to the common. The photo-MOS transistors are configured for AC and/or DC operation. The electronic position indicators require the supply (20 to 32 VDC) to be connected to pin 1 and ground connected to pin 15.

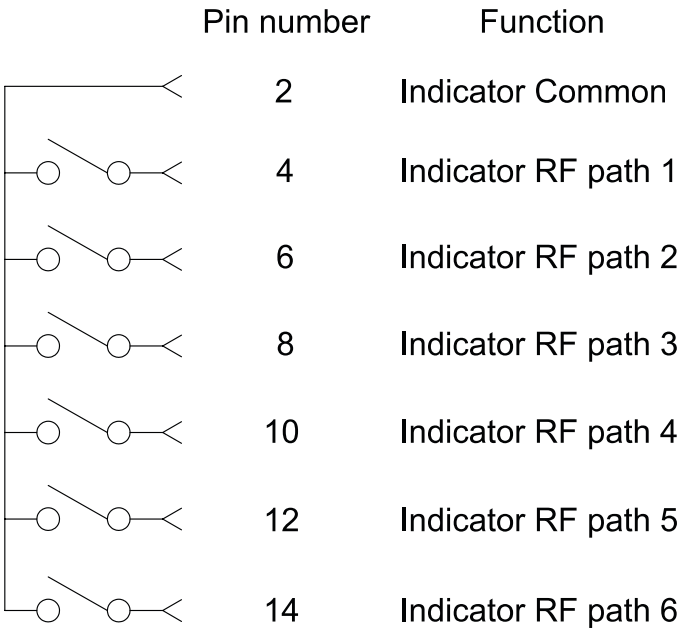


Pin number	Function
2	Indicator Common
4	Indicator RF path 1
6	Indicator RF path 2
8	Indicator RF path 3
10	Indicator RF path 4
12	Indicator RF path 5
14	Indicator RF path 6

Notes


Ways 1 and 4 are not connected for SP4T switches.

TYPE 7: WITH TTL (OPTION "2") / WITHOUT TTL (OPTION "1") & INDICATORS

Each RF path can be closed by applying ground or TTL "High" for option 2 to the corresponding "drive" pin. In general, except for Make-Before-Break drive, all other RF paths are simultaneously opened by internal logic.

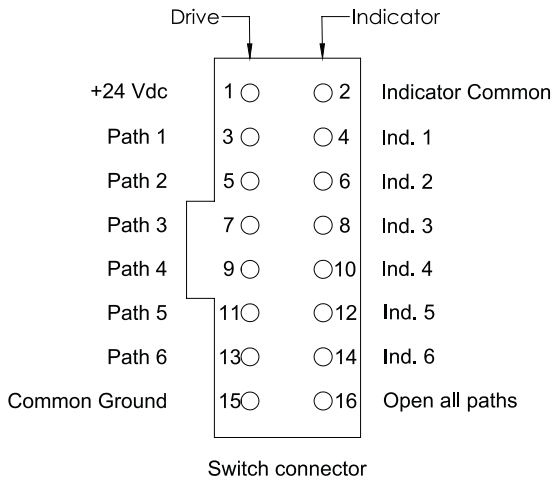

Switch connector

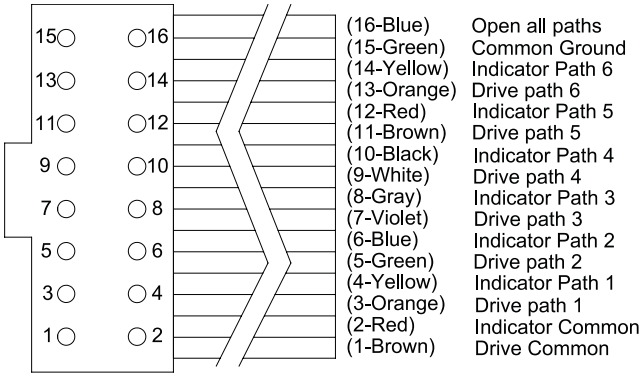

Mating cable connector

Standard drive option "1"

- Connect pin 15 to ground
- Connect pin 1 to supply (+20 VDC to +32 VDC)
- Select (close) desired RF path by applying ground to the corresponding "drive" pin (Ex: apply ground to pin 3 to close RF path 1)
- To select another path, ensure that all unwanted RF path "drive" pins are disconnected from ground (to prevent multiple RF path engagement), then apply ground to the "drive" pin which corresponds to the desired RF path
- To open all RF paths, ensure that all RF path "drive" pins are disconnected from ground. Complete the operation by applying ground to pin 16

TTL drive option "2"

- Connect pin 15 to ground
- Connect pin 1 to supply (+20 VDC to +32 VDC)
- Select (close) desired RF path by applying TTL "High" to the corresponding "drive" pin (Ex: apply TTL "High" to pin 3 to close RF path 1)
- To select another path, ensure that all unwanted RF path "drive" pins are in TTL "low" position (to prevent multiple RF path engagement), then apply TTL "high" to the "drive" pin which corresponds to the desired RF path
- To open all RF paths, ensure that all RF path "drive" pins are in TTL "Low" position. Complete the operation by applying TTL "High" to pin 16

Break-Before-Make

Open the undesired RF path for at least 15 ms (minimum), then close the new RF port

Make-Before-Break


Ensure that the previously selected RF path "drive" is connected to ground (or TTL "High" for option "2"), then close the new RF path


Notes


Ways 1 and 4 are not connected for SP4T switches.

TYPICAL OUTLINE DRAWING


SMA CONNECTORS

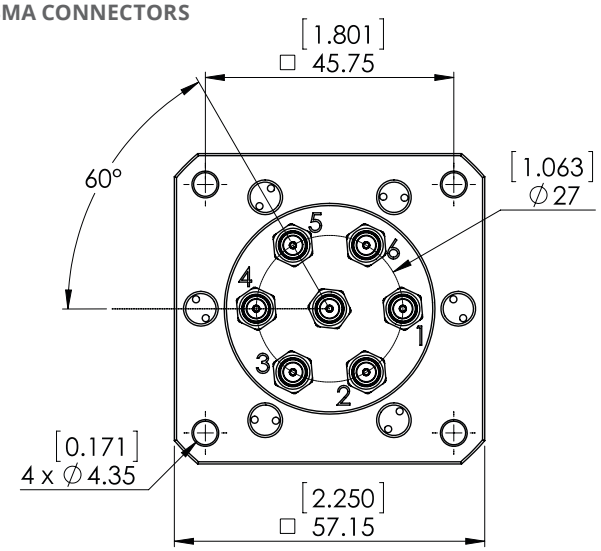


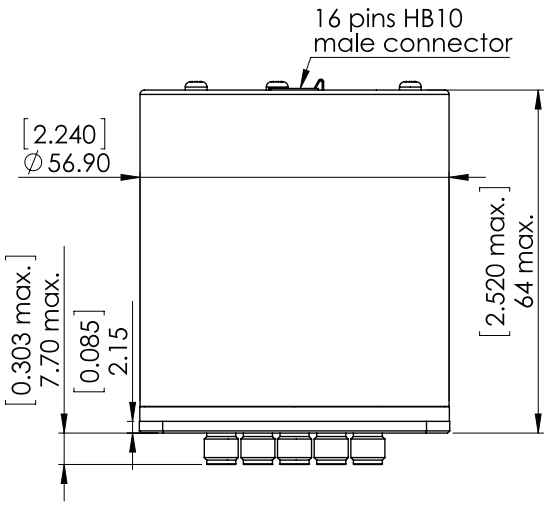




SMA 2.9 CONNECTORS

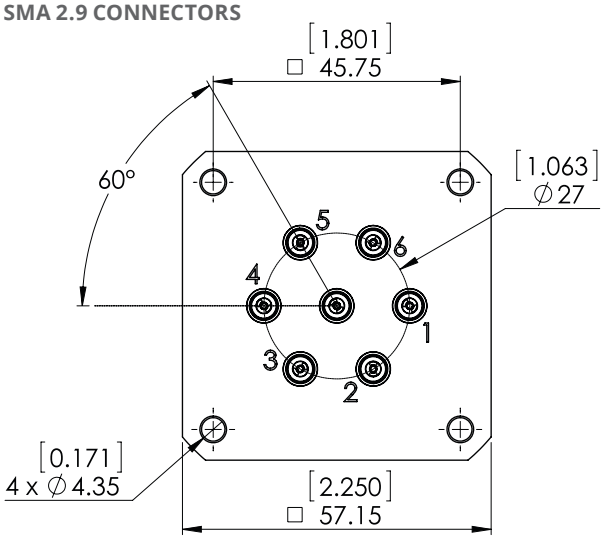

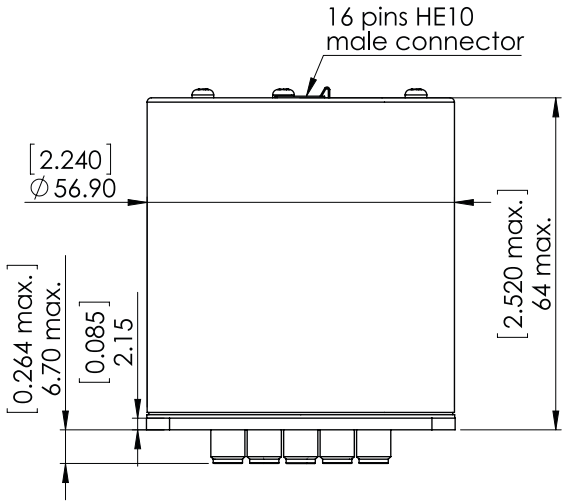




Notes

All dimensions are in millimeters [inches].
Ways 1 and 4 are not connected for SP4T switches.

POWER RATING CHART


This graph is based on the following conditions:

- *Ambient temperature: + 25 °C*
- *Sea level*
- *V.S.W.R.: 1 and cold switching*

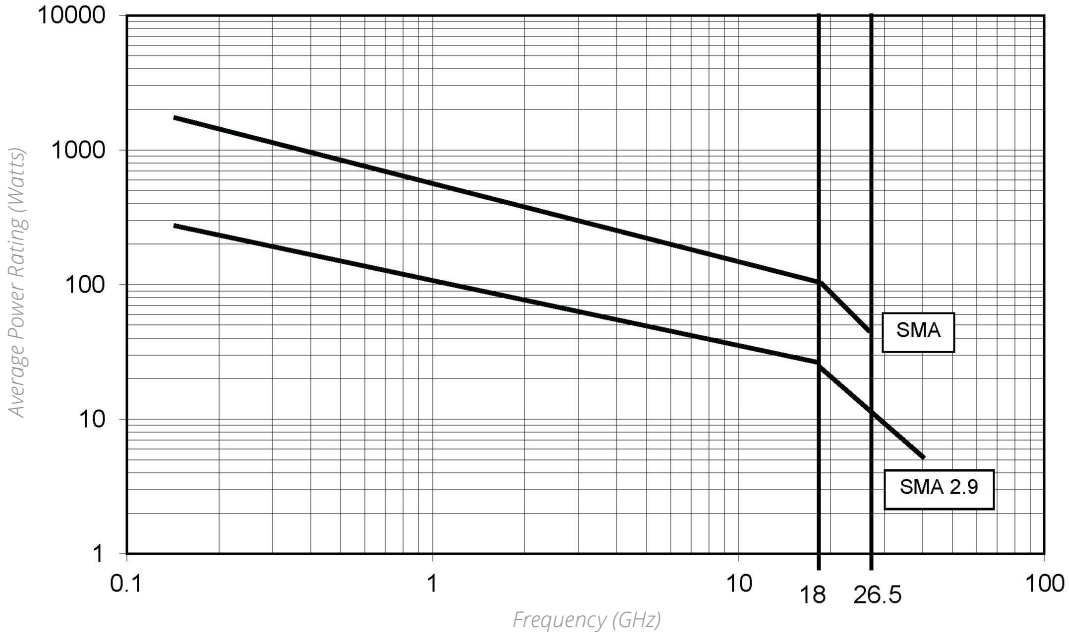

DERATING FACTOR VERSUS VSWR

The average power input must be reduced for load V.S.W.R. above 1:1.

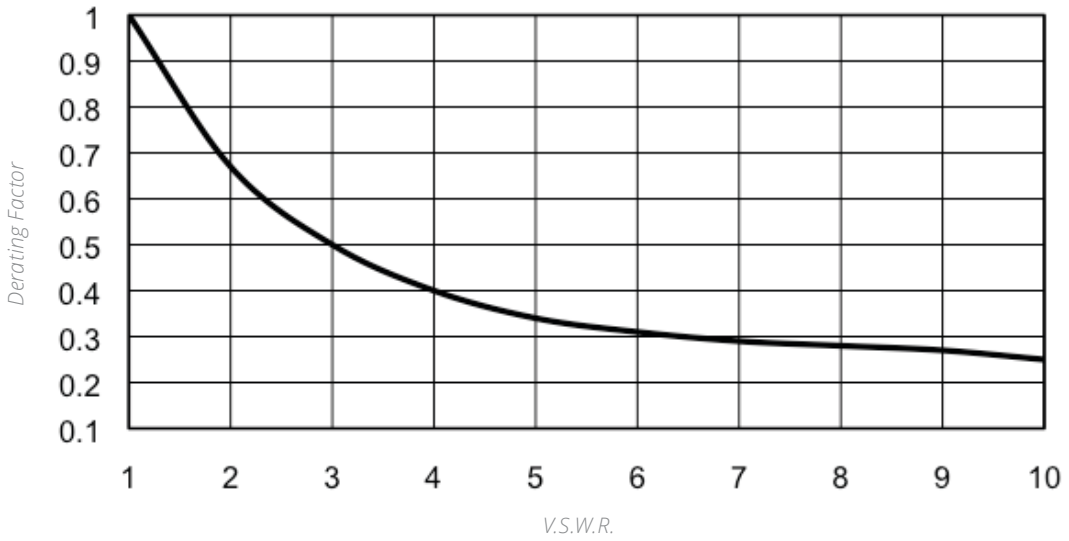

Notes

Ways 1 and 4 are not connected for SP4T switches.

Platinum Series

HIGH PERFORMANCE MULTIPORT SWITCHES

SPnT TERMINATED UP TO 40 GHz



Radiall's PLATINUM series switches are optimized to perform at a high level over an extended life cycle. With outstanding RF performance, and a guaranteed insertion loss repeatability of 0.03 dB over a life span of 10 million switching cycles, Radiall's PLATINUM series switches are a perfect solution for automated test and measurement equipment, as well as signal monitoring devices.

Example of P/N: R594873427 is a SPnT SMA 2.9 up to 40 GHz, Latching with Indicators, Self cut-off, Auto-Reset, TTL driver and HE10 connector.

PART NUMBER SELECTION

R594

SERIES PREFIX

RF CONNECTORS
3: SMA up to 6 GHz
4: SMA up to 20 GHz
F: SMA up to 26.5 GHz
8: SMA 2.9 up to 40 GHz [1]

TYPE
4: Latching + Self cut-off without indicator
7: Latching + Self cut-off + Auto Reset + Indicators

ACTUATOR VOLTAGE
3: 24 Vdc

NUMBER OF POSITIONS
4: 4 positions
6: 6 positions

OPTIONS
1: Positive common (without TTL)
2: TTL/5 V logic with 24 Vdc supply [2 & 3]

ACTUATOR TERMINAL
7: HE 10 receptacle, delivered with 750 mm (30 inches) ribbon cable + HE10 connector

DOCUMENTATION
-: Certificate of conformity
C: Calibration certificate
R: Calibration certificate + RF curves

Notes

Ways 1 and 4 are not connected for SP4T switches.
1. Connector SMA 2.9 is equivalent to "K connector®", registered trademark of Anritsu
2. Polarity is not relevant to application for switches with TTL driver
3. Only available with type "7"

Platinum Series

GENERAL SPECIFICATIONS

OPERATING MODE		LATCHING	
Nominal operating voltage (across operating temperature)	Vdc	24 (20/32)	
Coil resistance (+/-10%)	Ω	120	
Operating current at 23 °C	mA	200	
Maximum stand-by current	mA	50	
Average power		RF path Cold switching: See Power page 5-59 Hot switching: 1 Watt Cw	
		Internal terminations 1 Watt average into 50 Ω	
TTL input	High level	3 to 7 V	1.4 mA max at Vcc = Max
	Low level	0 to 0.8 Volts	-
Indicator specifications		Maximum withstanding voltage	60 V
		Maximum current capacity	150 mA
		Maximum "ON" resistance	2.5 Ω
		Minimum "OFF" resistance	100 MΩ
Switching time (max)	ms	15	
Life	SMA	10 million cycles	
	SMA 2.9	2.5 million cycles	
Connectors		SMA - SMA 2.9	
Actuator terminals		HE10 ribbon receptacle	
Weight (max)	g	230	

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range	-25 °C to +75 °C
Storage temperature range	-55 °C to +85 °C
Temperature cycling (MIL-STD-202, Method 107D, Cond.A)	-55 °C to +85 °C (10 cycles)
Vibration (MIL STD 202, Method 204D, Cond.D)	10 - 2000 Hz, 10 g - operating
Shock (MIL STD 202, Method 213B, Cond.C)	50 g/6 ms, 1/2 sine - operating
Moisture resistance (MIL STD 202, Method 106E, Cond.E)	65 °C, 95% RH, 10 days
Altitude storage (MIL STD 202, Method 105C, Cond.B)	50000 ft (15,240 meters)
RFI (MIL STD 1344, Method 3008 or IEC 61726)	55 dB at 20 GHz
Magnetic field	< 5.10-5 gauss at 1 meter


Platinum Series

RF PERFORMANCE


PART NUMBER		R5943-34-7	R5944-34-7 R5944-36-7		R594F-34-7 R594F-36-7		R5948-34-7 R5948-36-7	
Frequency Range	GHz	DC to 6	DC to 20		DC to 26.5		DC to 40	
Impedance	Ω	50						
Insertion Loss (max)	dB	0.3 + 0.015 × frequency (GHz)						
Isolation (min)	dB	100	DC to 6 GHz	100	DC to 6 GHz	100	DC to 6 GHz	100
			6 to 12.4 GHz	90	6 to 12.4 GHz	90	6 to 12.4 GHz	90
			12.4 to 20 GHz	80	12.4 to 20 GHz	80	12.4 to 18 GHz	80
			-		20 to 26.5 GHz	70	18 to 26.5 GHz	70
			-		-		26.5 to 40 GHz	60
V.S.W.R. (max)		1.20	DC to 6 GHz	1.20	DC to 6 GHz	1.20	DC to 6 GHz	1.20
			6 to 12.4 GHz	1.35	6 to 12.4 GHz	1.35	6 to 12.4 GHz	1.35
			12.4 to 20 GHz	1.45	12.4 to 20 GHz	1.45	12.4 to 18 GHz	1.45
			-		20 to 26.5 GHz	1.70	18 to 26.5 GHz	1.70
			-		-		26.5 to 40 GHz	1.90
Repeatability (measured at 25 °C)		0.03 dB					0.05 dB	

TYPICAL RF PERFORMANCE

INSERTION LOSS & ISOLATION

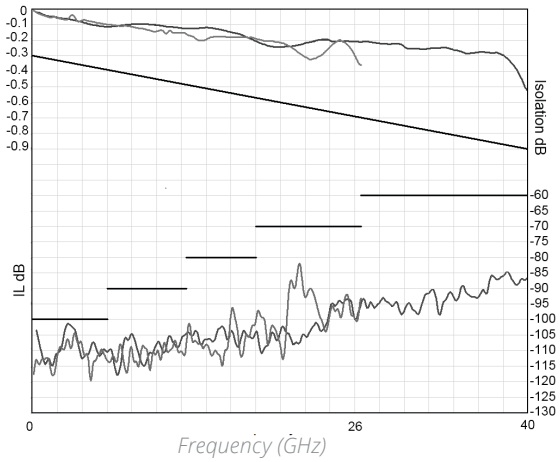

V.S.W.R

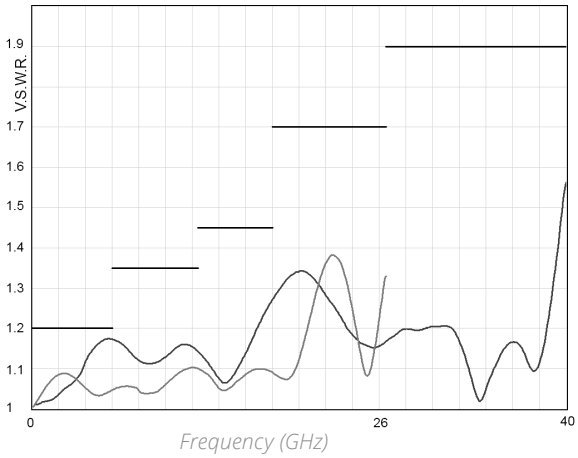


SMA —— **SMA 2.9** ▬

ELECTRONIC POSITION INDICATORS

(This option is not available with type 4)

The electronic position indicators use photo-MOS transistors, which are driven by the mechanical position of the RF paths moving elements. The circuitry consists of a common which can be connected to an output corresponding to selected RF path. If one or several RF paths are closed, the corresponding indicators are connected to the common. The photo-MOS transistors are configured for AC and/or DC operation. The electronic position indicators require the supply (20 to 32 VDC) to be connected to pin 1 and ground connected to pin 15.

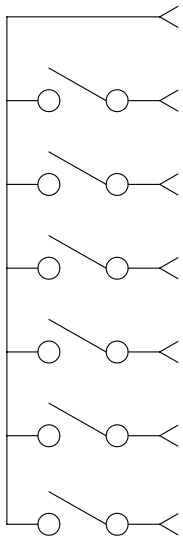

Pin number	Function
2	Indicator Common
4	Indicator RF path 1
6	Indicator RF path 2
8	Indicator RF path 3
10	Indicator RF path 4
12	Indicator RF path 5
14	Indicator RF path 6


Notes

Ways 1 and 4 are not connected for SP4T switches.

DRIVING THE SWITCH

Each RF path is driven independently, and can be closed or open by applying ground to the corresponding "open" or "close" pin.

TYPE 4: WITHOUT TTL AND WITHOUT INDICATOR

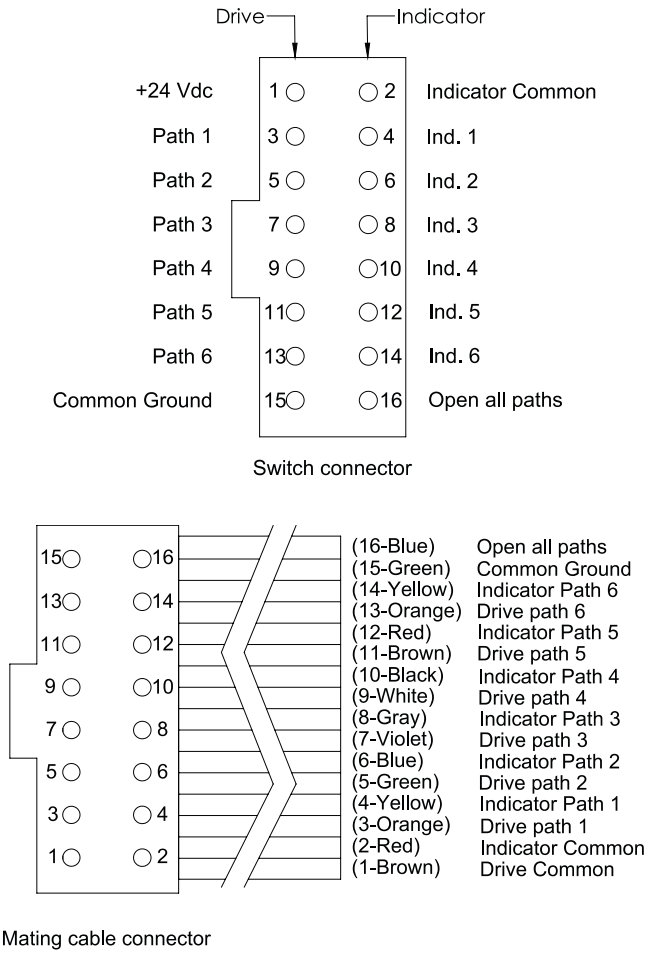

Standard drive

- Connect pin 15 to ground
- Connect pin 1 to supply (+20 VDC to +32 VDC)
- Select desired RF path by applying ground to the corresponding "close" pin (Ex: ground pin 3 to close RF path 1)
- To open desired RF path connect ground to the corresponding "open" pin (Ex: ground pin 4 to open RF path 1)
- To open all RF paths, first ensure that all RF path "close" pins are disconnected from ground, then to complete the operation, connect pin 16 to ground

Make-Before-Break


Make-Before-Break switching can be accomplished by closing the new RF path before opening the previously selected RF path. To complete the operation, close the new RF port for at least 15 minutes (minimum), then open the previously selected RF port.

Notes


Ways 1 and 4 are not connected for SP4T switches.

TYPE 7: WITH TTL (OPTION "2") / WITHOUT TTL (OPTION "1") & INDICATORS

Each RF path can be closed by applying Ground or TTL "High" for option 2 to the corresponding "drive" pin. In general, except for Make-Before-Break drive, all other RF paths are simultaneously opened by internal logic.

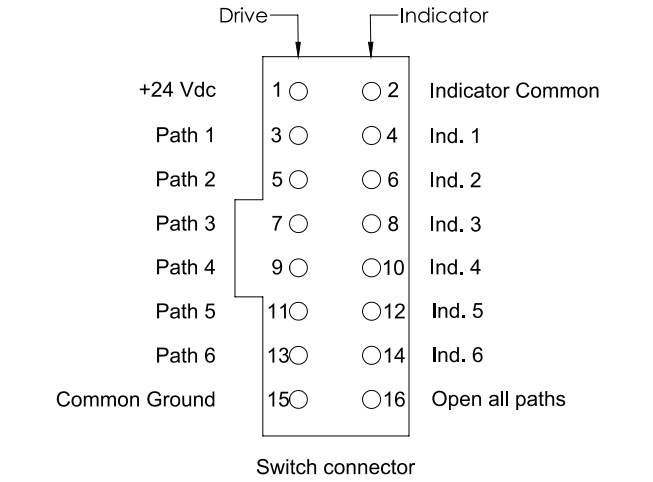

Switch connector

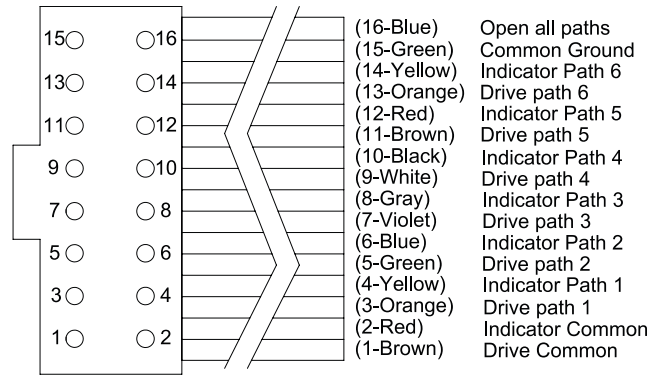

Mating cable connector

Standard drive option "1"

- Connect pin 15 to ground
- Connect pin 1 to supply (+20 VDC to +32 VDC)
- Select (close) desired RF path by applying ground to the corresponding "drive" pin (Ex: apply ground to pin 3 to close RF path 1)
- To select another path, ensure that all unwanted RF path "drive" pins are disconnected from ground (to prevent multiple RF path engagement), then apply ground to the "drive" pin which corresponds to the desired RF path
- To open all RF paths, ensure that all RF path "drive" pins are disconnected from ground, then complete the operation by applying ground to pin 16

TTL drive option "2"

- Connect pin 15 to ground
- Connect pin 1 to supply (+20 VDC to +32 VDC)
- Select (close) desired RF path by applying TTL "High" to the corresponding "drive" pin (Ex: apply TTL "High" to pin 3 to close RF path 1)
- To select another path, ensure that all unwanted RF path "drive" pins are in TTL "Low" position (to prevent multiple RF path engagement), then apply TTL "High" to the "drive" pin which corresponds to the desired RF path
- To open all RF paths, ensure that all RF path "drive" pins are in TTL "Low" position, then complete the operation by applying TTL "High" to pin 16

Break-Before-Make

Open the undesired RF path after 15 ms (minimum), then close the new RF port.

Make-Before-Break

Ensure that the previously selected RF path "drive" is connected to ground (or TTL "High" for option "2"), then close the new RF path.


Notes


Ways 1 and 4 are not connected for SP4T switches.


Platinum Series

TYPICAL OUTLINE DRAWING


SMA CONNECTORS

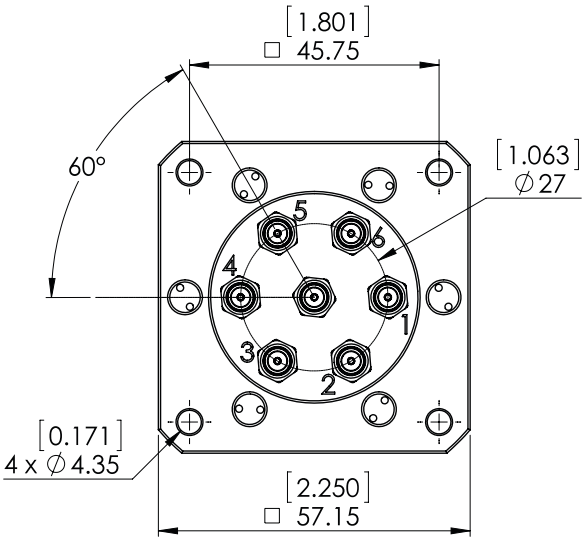


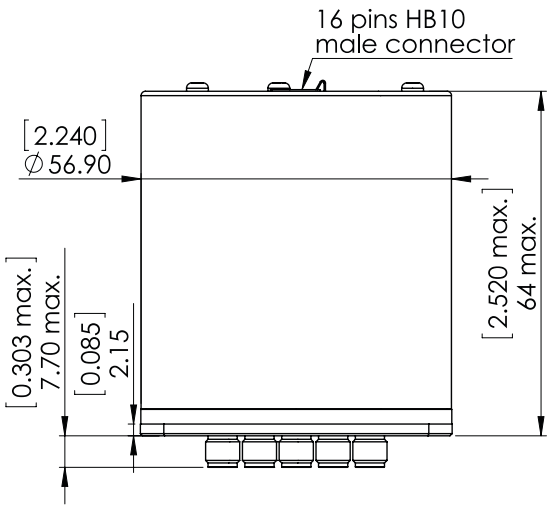




SMA 2.9 CONNECTORS

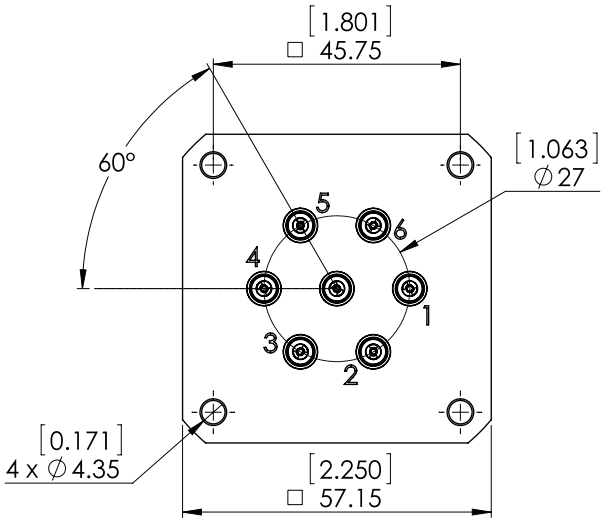

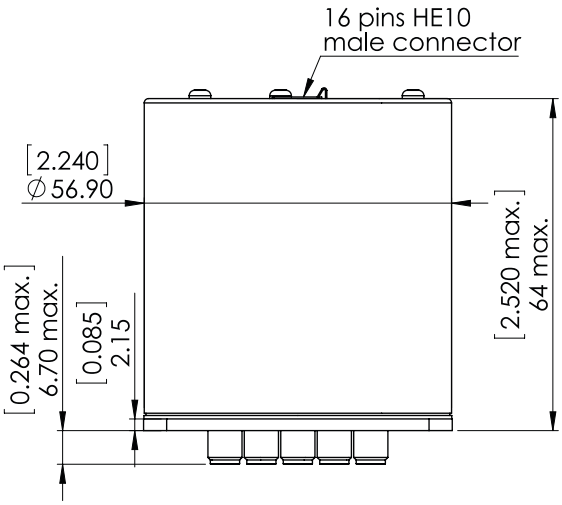




Notes

All dimensions are in millimeters [inches]. Ways 1 and 4 are not connected for SP4T switches.

POWER RATING CHART


This graph is based on the following conditions:

- *Ambient temperature: + 25 °C*
- *Sea level*
- *V.S.W.R.: 1 and cold switching*

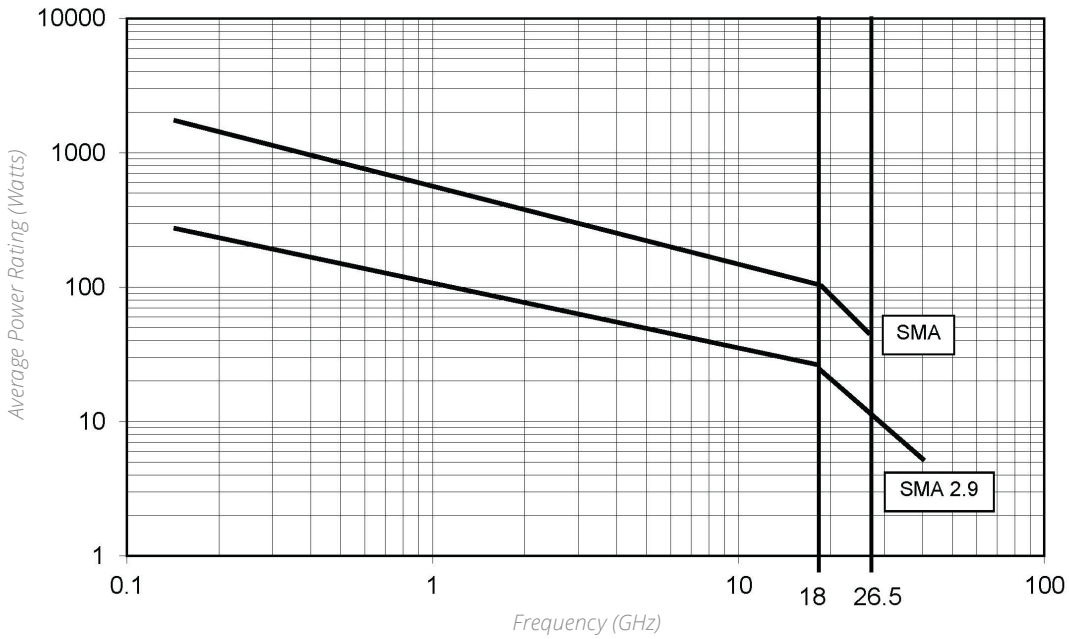

DERATING FACTOR VERSUS VSWR

The average power input must be reduced for load V.S.W.R. above 1:1.

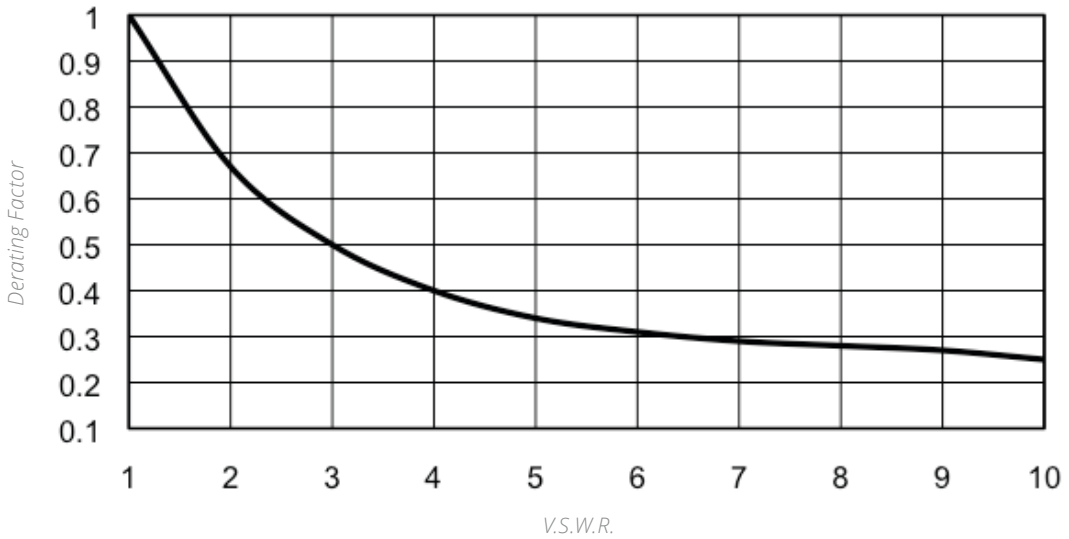

OPTIONAL FEATURES

EXAMPLES OF DEDICATED APPLICATION OPTIONS



Cryogenic switches can work at extremely low temperatures (0 Kelvin/-273 °C), and they need very little power for actuation. For more informations, consult our website.



Thermal vacuum SPnT up to 50 GHz designed based on our expertise in Space. For more detailed information, see page 7-18 to 7-20.



SPnT models can be fitted with external loads (up to 50 GHz) for an easy maintenance of equipment.




7P6T switch for a Custom Matrix Switch (4P3T) with 4 Input ports and 4 Output ports configured for 3 transmission systems and one redundancy channel (N+1: N type) for example.



SP3T used for a military application with sequential access and severe environmental characteristics.



Unterminated SP3-6T with 9 pins D-sub connector instead of solder pins.

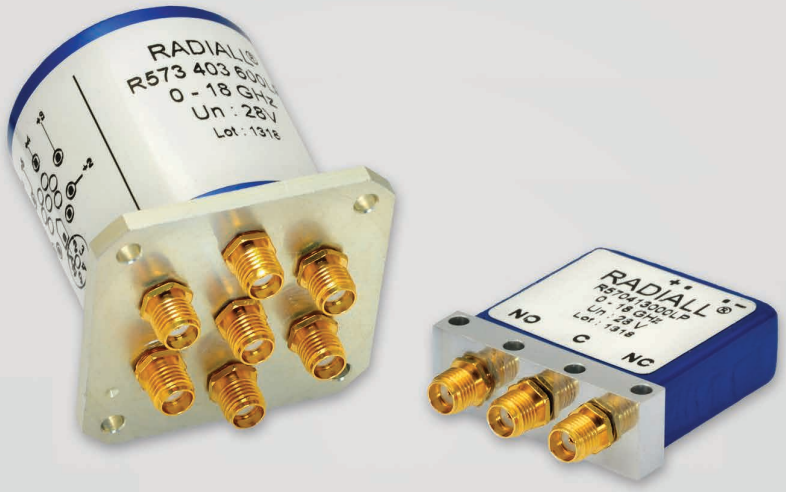

LOW PIM

Section 6 Table of Contents

RAMSES SERIES

SPDT up to 18 GHz: R570xxxxxxLP Series ..... 6-2 to 6-5
DPDT up to 18 GHz: R577xxxxxxLP Series ..... 6-6 to 6-9
SPnT up to 18 GHz: R573xxxxxxLP Series..... 6-10 to 6-15
Coaxial Low PIM Switches - Electrical Schematics..... 6-16

LOW PIM PART NUMBER SELECTION GUIDE [1]

DIGITAL POSITION		R 1-3:	4: RF CONNECTORS		5: TYPE			6: VOLTAGE		7: TTL		8: OPTIONS				9: TERMINALS		10-11: LP
Series	Configuration	-	N 12.4 GHz	SMA 18 GHz	Failsafe	Latching	Normally open [1]	12 V	28 V	Without TTL	With TTL	Without option	Positive common	Supression diodes	Positive common and suppression diodes	Solder pins	D-Sub connector	Low pim
RAMSES	SPDT	R570	1	4	0/1	2/3/5/6	-	2	3	0	1	0	1	3	4	0	5	-
	DPDT	R577	1	4	0/1	2/3/5/6	-	2	3	0	1	0	1	3	4	0	5	-

DIGITAL POSITION		R 1-3:	4: RF CONNECTORS		5: TYPE			6: VOLTAGE		7: POS.		8: OPTIONS					9: TERMINALS		10-11: LP
Series	Configuration	-	N 12.4 GHz	SMA 18 GHz	Failsafe	Latching	Normally open [1]	12 V	28 V	Number of positions	With TTL	Without option	Positive common	TTL Driver	Supression diodes	Positive common and suppression diodes	Solder pins	D-Sub connector	Low pim
RAMSES	SPnT	R573	1	4	-	2/3/4/5/8/9	0/1	2	3	4/6		0	1	2	3	4	0	5	-

Notes

Example of P/N: R573423600LP is a SP6T SMA 18 GHz, latching, 28 Vdc, without option, solder pins.
1. For part number creation and available options, see detailed part number selection for each series.

RAMSES Series

SPDT LOW PIM UP TO 18 GHz



To meet market demands created by the deployment of 4G/LTE networks, Radiall offers a range of Low PIM switches. RAMSES SPDT Low PIM switches are perfectly suited for RF test systems and test benches requiring excellent passive intermodulation performance up to 18 GHz; with a guarantee PIM performance of -160 dBc at +43 dBm over a life span of 2 million switching cycles. These products are specific to instrumentation and telecommunication applications.

Example of P/N: R570413030LP is a SPDT Low PIM SMA 18 GHz, failsafe, 28 Vdc, with supression diodes, solder pins.

PART NUMBER SELECTION

R570 ____ LP

SERIES PREFIX

FREQUENCY RANGE
1: N up to 12.4 GHz
4: SMA up to 18 GHz

TYPE
1: Failsafe
2: Failsafe + I.C.
3: Latching
4: Latching + I.C.
5: Latching + S.C.O. [1]
6: Latching + S.C.O. + I.C. [1]

ACTUATOR VOLTAGE
2: 12 Vdc
3: 28 Vdc

TTL OPTION
0: Without TTL driver
1: With TTL driver [1 & 3]

OPTIONS
0: Without option
1: Positive common [2]
3: With suppression diodes
4: With suppression diodes and positive common [2]

ACTUATOR TERMINALS
0: Solder pins
5: D-Sub connector [4]

Notes
I.C.: Indicator contact - S.C.O.: Self Cut-Off
1. Suppression diodes are already included in Self Cut-Off & TTL option
2. Positive common shall be specified only with type 3, 4, 5 & 6 because failsafe models can be used with both polarities
3. Polarity is not relevant to application for switches with TTL driver
4. Only available for N models

RAMSES Series

GENERAL SPECIFICATIONS

OPERATING MODE			FAILSAFE		LATCHING	
Nominal operating voltage (across operating temperature)		Vdc	12 (10.2 to 13)	28 (24 to 30)	12 (10.2 to 13)	28 (24 to 30)
Coil resistance at 23 °C (+/-10%)	SMA	Ω	47.5	275	58	350
	N		38	200	38	225
Operating current at 23 °C	SMA	mA	250	102	210	80
	N		320	140	320	125
Average power			See Power Rating Chart on page 1-13			
TTL input		High level	2.2 to 5.5 V (TTL Option)/3.5 to 5.5 V (BCD Option)			
		Low level	0 to 0.8 V (TTL Option)/0 to 1.5 V (BCD Option)			
Indicator rating			1 Watt/30 Volts/100 mA			
Switching time		ms	15 ms			
Life			2 million cycles			
Connectors			SMA - N			
Actuator terminals			Solder pins or male 25 pin D-Sub connector			
Operating temperature range			-25 °C to +70 °C			
Storage temperature range			-55 °C to +85 °C			
Vibration (MIL STD 202, method 204D, cond.D)			10 - 2,000 Hz - 20 g operating			
Shock (MIL STD 202, method 213B, cond.C)			100 g/6 ms - ½ sine operating			

RF PERFORMANCE


CONNECTORS	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	IMPEDANCE Ω	THIRD ORDER INTERMODULATION
N	DC - 12.4	DC - 1	1.15	0.15	85	50	-160 dBc at +43 dBm (2 carriers 20 W)
		1 - 2	1.20	0.20	80		
		2 - 3	1.25	0.25	75		
		3 - 8	1.35	0.35	70		
		8 - 12.4	1.50	0.50	60		
SMA	DC - 18	DC - 3	1.10	0.15	80		
		3 - 8	1.20	0.20	75		
		8 - 12.4	1.20	0.25	65		
		12.4 - 18	1.40	0.35	60		

PASSIVE INTERMODULATION

TONE 1	1810 MHz, approximately 43 dBm
TONE 2	1850 MHz, approximately 43 dBm
3RD ORDER PIM	-160 dBc at 1770 MHz

Depending on application, carrier powers and frequencies — PIM measurements can vary. PIM testing is not measured during product acceptance test.

OUTSTANDING PIM PERFORMANCE

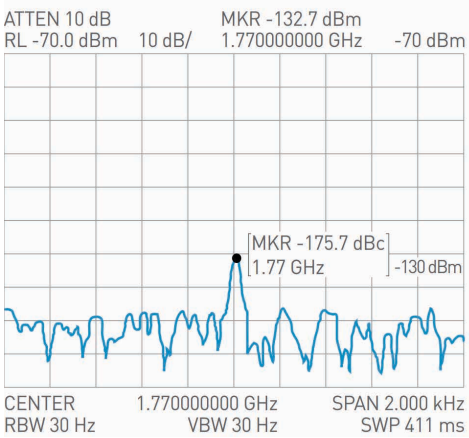

Notes


Reset: supply voltage time 1 sec. max./duty cycle 10%

RAMSES Series


TYPICAL RF PERFORMANCE

Example: SPDT N up to 12.4 GHz

INSERTION LOSS & ISOLATION

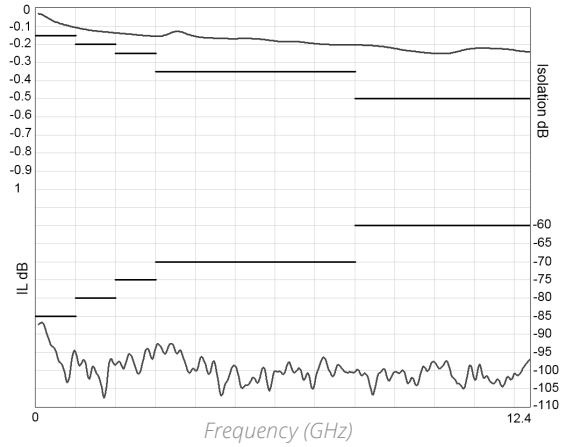


V.S.W.R

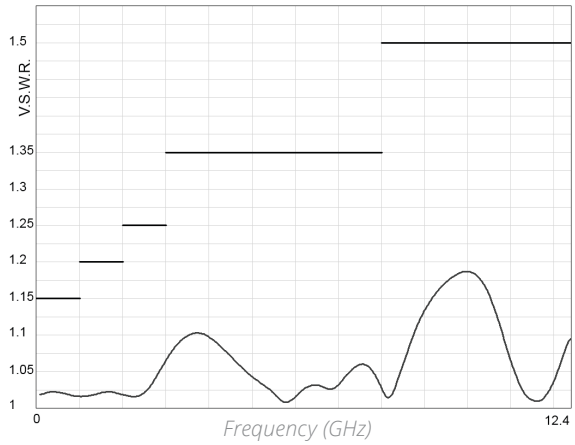


Example: SPDT SMA up to 18 GHz

INSERTION LOSS & ISOLATION

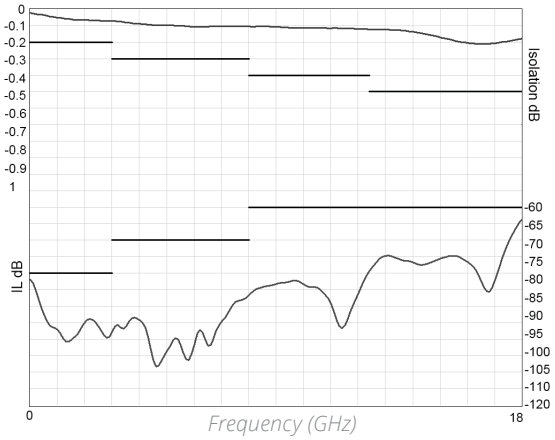

V.S.W.R

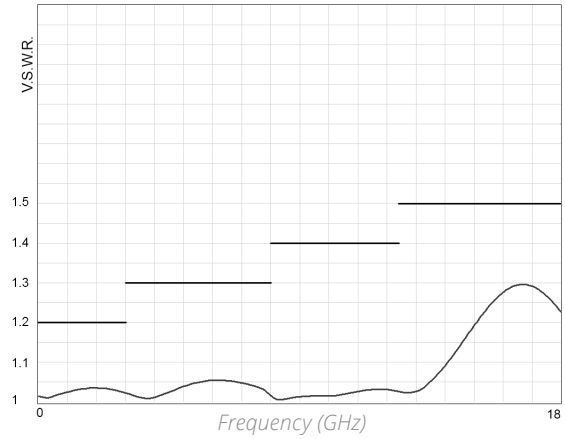


Notes


See electrical schematics from page 2-20 to 2-23.

TYPICAL OUTLINE DRAWING


EXAMPLE: SPDT N UP TO 12.4 GHz WITH PINS

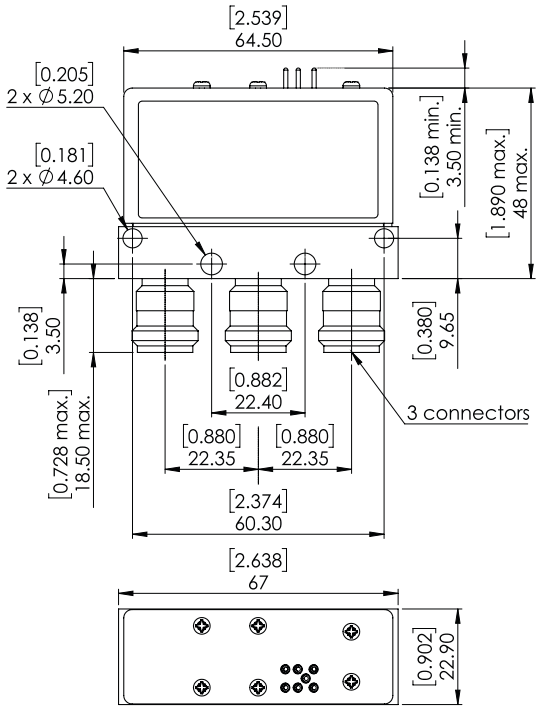

EXAMPLE: SPDT N UP TO 12.4 GHz WITH D-SUB

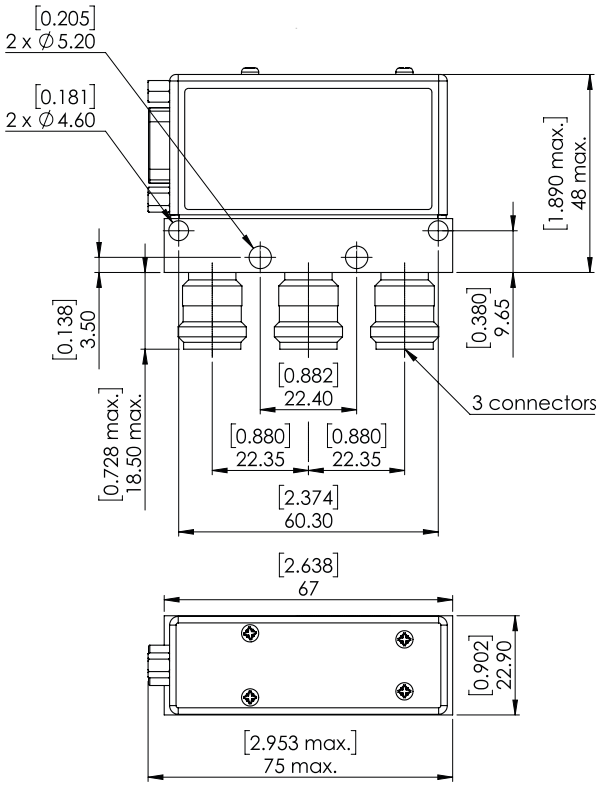

EXAMPLE: SPDT SMA UP TO 18 GHz

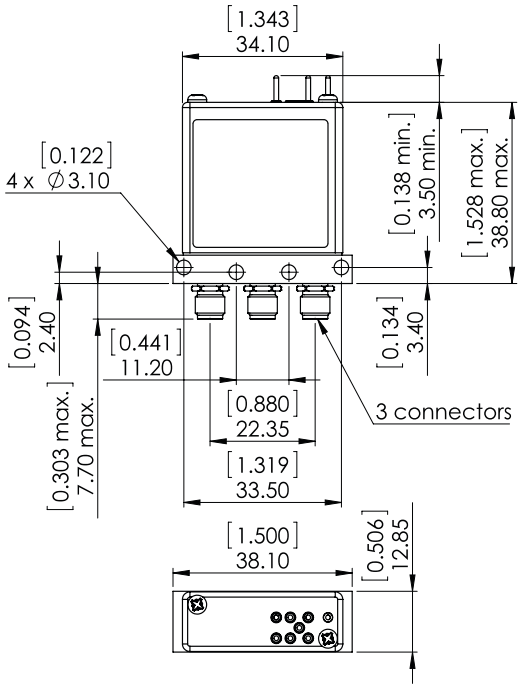

Notes

All dimensions are in millimeters [inches].

RAMSES Series

DPDT LOW PIM UP TO 18 GHz



To meet market demands created by the deployment of 4G/LTE networks, Radiall offers a range of Low PIM switches. RAMSES DPDT Low PIM switches are perfectly suited for RF test systems and test benches requiring excellent passive intermodulation performance up to 18 GHz; with a guarantee PIM performance of -160 dBc at +43 dBm over a life span of 2 million switching cycles. These products are specific to instrumentation and telecommunication applications.

Example of P/N: R577163105LP is a DPDT Low PIM N 12.4 GHz latching with Indicators, Self Cut-Off, 28 Vdc, TTL driver, D-Sub connector.

PART NUMBER SELECTION

R577 _ _ _ _ _ _ LP

SERIES PREFIX

FREQUENCY RANGE
1: N up to 12.4 GHz
4: SMA up to 18 GHz

TYPE
1: Failsafe
2: Failsafe + I.C.
3: Latching
4: Latching + I.C.
5: Latching + S.C.O. [1]
6: Latching + S.C.O. + I.C. [1]

ACTUATOR VOLTAGE
2: 12 Vdc
3: 28 Vdc

TTL OPTION
0: Without TTL driver
1: With TTL driver [1 & 3]

OPTIONS
0: Without option
1: Positive common [2]
3: With suppression diodes
4: With suppression diodes and positive common [2]

ACTUATOR TERMINALS
0: Solder pins
5: D-Sub connector

Notes
I.C.: Indicator contact - S.C.O.: Self Cut-Off
1. Suppression diodes are already included in Self Cut-Off & TTL option
2. Positive common shall be specified only with type 3, 4, 5 & 6 because failsafe models can be used with both polarities
3. Polarity is not relevant to application for switches with TTL driver

RAMSES Series

GENERAL SPECIFICATIONS

OPERATING MODE		NORMALLY OPEN		LATCHING	
Nominal operating voltage (across operating temperature)	Vdc	12 (10.2 to 13)	28 (24 to 30)	12 (10.2 to 13)	28 (24 to 30)
Coil resistance (+/-10%)	Ω	35	200	38	225
Nominal operating current at 23 °C	mA	340	140	320	125
Average power		See Power Rating Chart on page 1-13			
TTL input	High level	2.2 to 5.5 V		800 µA max 5.5 V	
	Low level	0 to 0.8 V		20 µA max 0.8 V	
Indicator rating		1 W/30 V/100 mA			
Switching time (max)	ms	15			
Life		2 million cycles			
Connectors		SMA - N			
Actuator terminals		Solder pins or male 9 pin D-Sub connector			
Operating temperature range		-25 °C to +70 °C			
Storage temperature range		-55 °C to +85 °C			
Vibration (MIL STD 202, method 204D, cond.C)		10-2000 Hz, 10 g		Operating	
Shock (MIL STD 202, method 213B, cond.G)		50 g/11 ms, ½ sine		Operating	

RF PERFORMANCE


CONNECTORS	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	IMPEDANCE Ω	THIRD ORDER INTERMODULATION
N	DC - 3 DC - 12.4	DC - 1	1.15	0.15	85	50	-160 dBc at +43 dBm (2 carriers 20 W)
		1 - 2	1.20	0.20	80		
		2 - 3	1.25	0.25	75		
		3 - 8	1.35	0.35	70		
		8 - 12.4	1.50	0.50	60		
SMA	DC - 3 DC - 18	DC - 3	1.20	0.20	80		
		3 - 8	1.30	0.30	70		
		8 - 12.4	1.40	0.40	65		
		12.4 - 18	1.50	0.50	60		

PASSIVE INTERMODULATION

TONE 1	1810 MHz, approximately 43 dBm
TONE 2	1850 MHz, approximately 43 dBm
3RD ORDER PIM	-160 dBc at 1770 MHz

Depending on application, carrier powers and frequencies — PIM measurements can vary. PIM testing is not measured during product acceptance test.

OUTSTANDING PIM PERFORMANCE

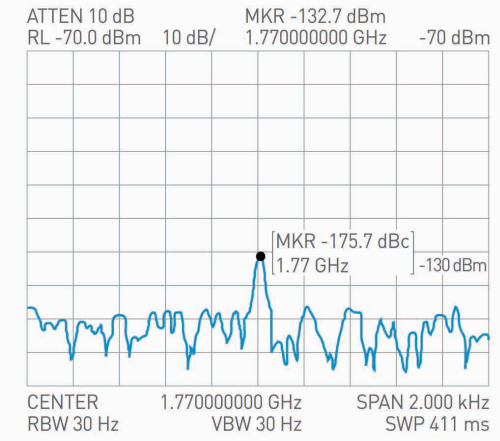


RAMSES Series


TYPICAL RF PERFORMANCE

Example: DPDT N up to 12.4 GHz

INSERTION LOSS & ISOLATION

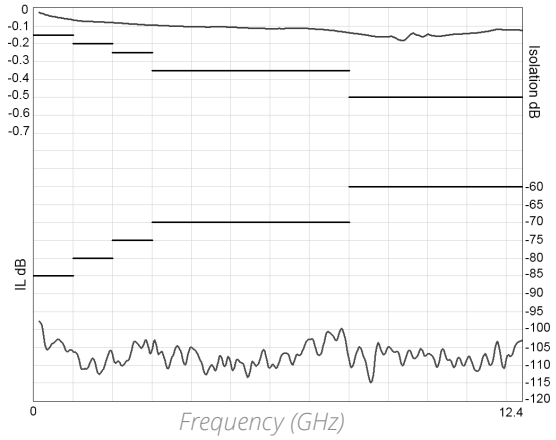


V.S.W.R

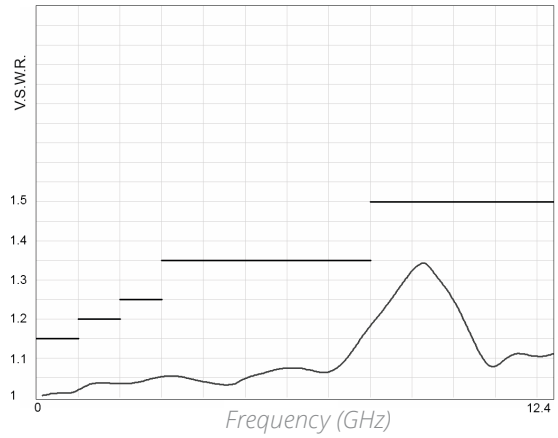


Example: DPDT SMA up to 18 GHz

INSERTION LOSS & ISOLATION

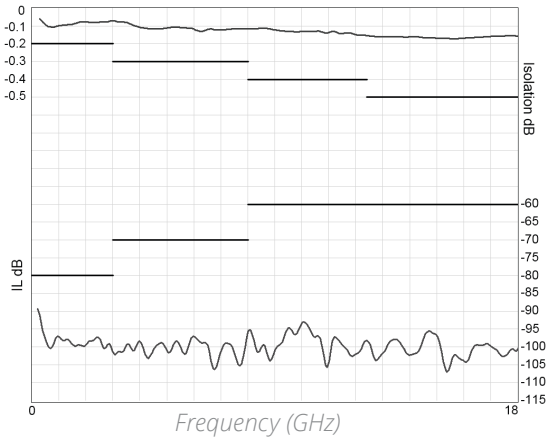

V.S.W.R

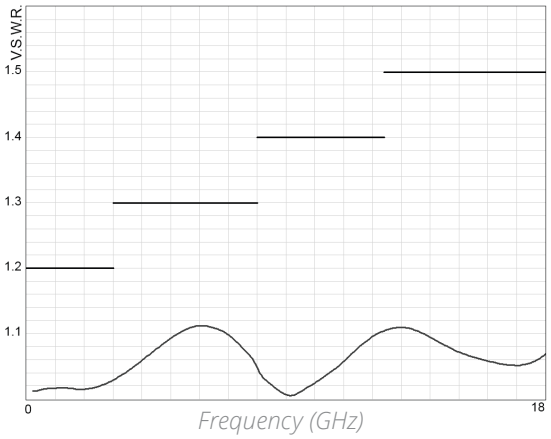


Notes


See electrical schematics from page 4-10 to 4-13.

TYPICAL OUTLINE DRAWING


EXAMPLE: DPDT N UP TO 12.4 GHz WITH PINS

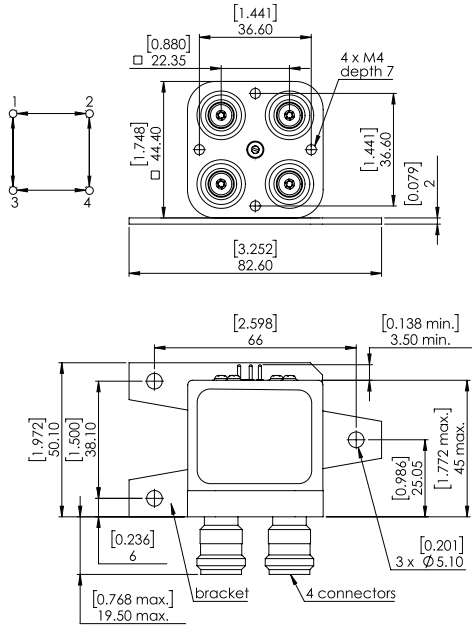


EXAMPLE: DPDT N UP TO 12.4 GHz WITH D-SUB

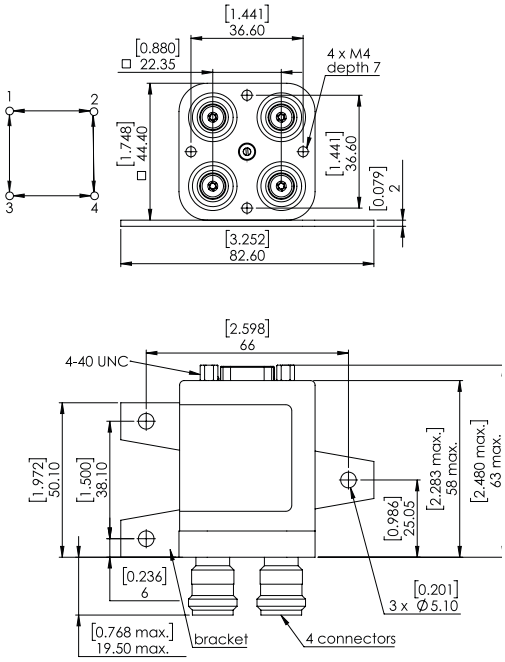

EXAMPLE: DPDT SMA UP TO 18GHz WITH PINS

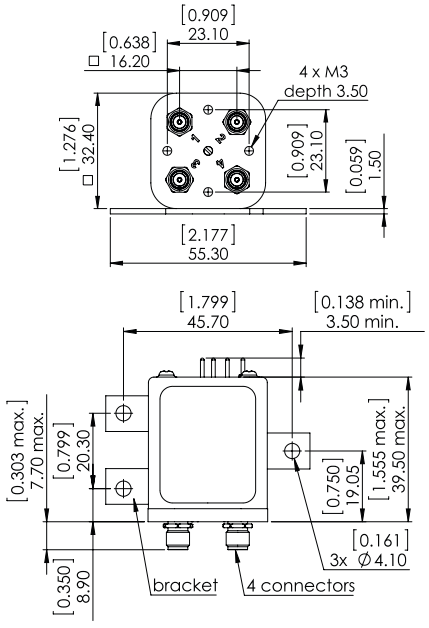

EXAMPLE: DPDT SMA UP TO 18 GHz WITH D-SUB

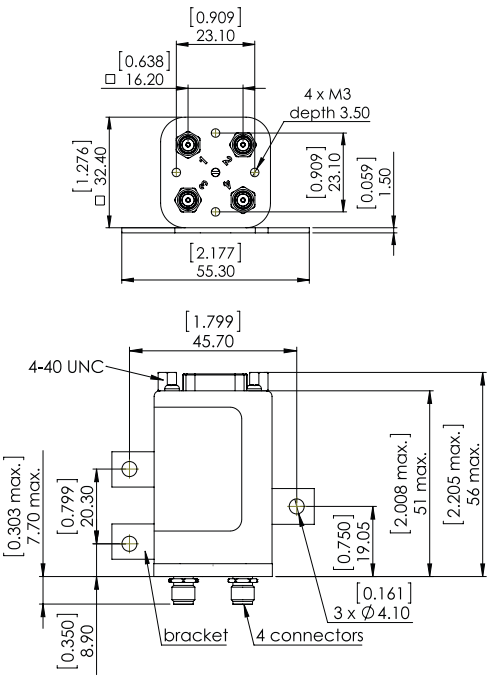

Notes

All dimensions are in millimeters [inches].

RAMSES Series

SPnT LOW PIM UP TO 18 GHz



To meet market demands created by the deployment of 4G/LTE networks, Radiall offers a range of Low PIM switches. RAMSES SPnT Low PIM switches are perfectly suited for RF test systems and test benches requiring excellent passive intermodulation performance up to 18 GHz; with a guarantee PIM performance of -160 dBc at +43 dBm over a life span of 2 million switching cycles. These products are specific to instrumentation and telecommunication applications.

Example of P/N: R573403600LP is a SP6T Low PIM SMA up to 18 GHz, Normally Open, 28 Vdc, without option and solder pins.

PART NUMBER SELECTION

R57 3 _ _ _ _ _ _ LP

SERIES PREFIX

MODEL
3: Without 50 Ω termination

RF CONNECTORS
1: N up to 12.4 GHz
4: SMA up to 18 GHz

TYPE
0: Normally open
1: Normally open + I.C.
2: Latching
3: Latching +I.C.
4: Latching + S.C.O. [1]
5: Latching + S.C.O. + I.C. [1]
8: Latching + S.C.O. + A.R. [1]
9: Latching + S.C.O. + I.C. + A.R. [1]

ACTUATOR VOLTAGE
2: 12 Vdc
3: 28 Vdc

NUMBER OF POSITIONS
4: 4 Positions
6: 6 Positions

OPTIONS
0: Without option
1: Positive common [5]
2: Compatible TTL driver [1 & 2]
3: With suppression diodes
4: With suppression diodes and positive common [3]
8: BCD TTL driver compatible [1, 2, 4, & 5]

ACTUATOR TERMINALS
0: Solder pins
5: D-Sub connector

Notes
I.C.: Contact / S.C.O.: Self Cut-Off / A.R.: Auto Reset
1. These models are already equipped with suppression diodes
2. Polarity is not relevant to application for switches with TTL driver
3. Option available only for type 0, 1, 2 and 3
4. Latching BCD driver enables also a global reset through driver code 0000 (see BCD logic coding page 1-11)
5. Option available only with type 0, 1, 2, 3 and with type 8 and 9 combined with 28 Vdc.

GENERAL SPECIFICATIONS

Type 2, 3, 4 and 5:

Latching models have a RESET pin which commands the reset of all positions. This command should be used before switching from one position to another. If not, two positions will be set at the same time.

Note: During the RESET operation the global current is the nominal operating current multiplied by the number of positions.


Type 8, 9:

Latching models with AUTOMATIC RESET are available; these products have an internal SET/RESET circuit which automatically resets all the non-selected positions and sets the desired position. This option simplifies the use of latching switches by suppressing the RESET command in switching sequence. An electronic circuit supplies successively groups of 2, 3 or 4 actuators, in order to limit the maximum current. The current with this option is the total current of 2, 3 or 4 reset coils in the same time (see table below).


Example: During the AUTOMATIC RESET operation, at 28 Vdc, 4 position switch has a temporary consumption of only 250 mA, during 40 ms maximum.

SWITCHING SEQUENCE

FOR SP4T

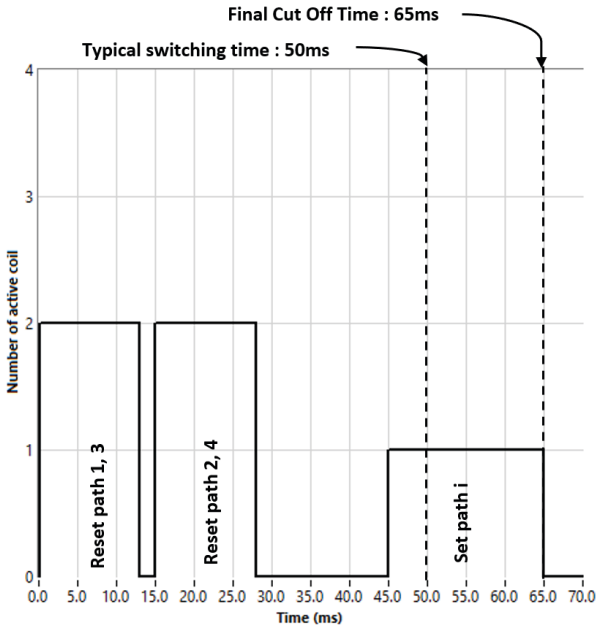

FOR SP6T

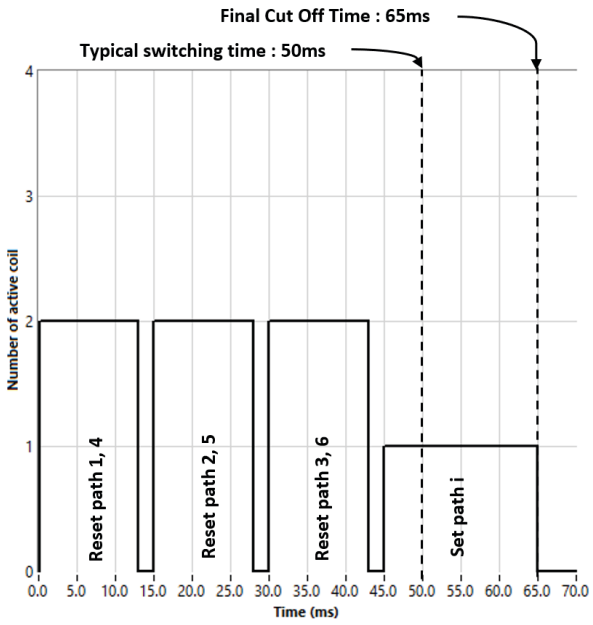

Notes

See electrical schematics from page 5-47 to 5-52.

RAMSES Series

GENERAL SPECIFICATIONS

OPERATING MODE		NORMALLY OPEN		LATCHING	
Nominal operating voltage (across operating temperature)	Vdc	12 (10.2 to 13)	28 (24 to 30)	12 (10.2 to 13)	28 (24 to 30)
Coil resistance at 23 °C (+/-10%)	Ω	47.5	275	38	225
Nominal operating current at 23 °C	mA	250	102	320 Reset SP4T: 1280 mA [1] Reset SP6T: 1920 mA [1]	125 Reset SP4T: 500 mA [1] Reset SP6T: 750 mA [1]
Average power		See Power Rating Chart on page 1-13			
TTL input	High level	2.2 to 5.5 V (TTL Option) / 3.5 to 5.5 V (BCD Option)			
	Low level	0 to 0.8 V (TTL Option) / 0 to 1.5 V (BCD Option)			
Indicator rating		1 W/30 V/100 mA			
Switching time (max)	ms	15 For automatic reset models: 40			
Life		2 million cycles			
Connectors		SMA - N			
Actuator terminals		Solder pins or male 25 pin D-Sub connector			
Operating temperature range		-25 °C to +70 °C			
Storage temperature range		-55 °C to +85 °C			
Vibration (MIL STD 202, method 204D, cond.D)		10 - 2000 Hz , 20 g		Operating	
Shock (MIL STD 202, method 213B, cond.C)		100 g/6 ms, ½ sine		Operating	

RF PERFORMANCE


CONNECTORS	NUMBER OF POSITIONS	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	IMPEDANCE Ω	THIRD ORDER INTERMODULATION
SMA	4 and 6	DC - 18	DC - 3	1.20	0.20	80	50	-160 dBc at +43 dBm (2 carriers 20 W)
			3 - 8	1.30	0.30	70		
			8 - 12.4	1.40	0.40	60		
			12.4 - 18	1.50	0.50	60		
N		DC - 12.4	DC - 3	1.20	0.20	80		
			3 - 8	1.35	0.35	70		
			8 - 12.4	1.50	0.50	60		

PASSIVE INTERMODULATION

TONE 1	1810 MHz, approximately 43 dBm
TONE 2	1850 MHz, approximately 43 dBm
3RD ORDER PIM	-160 dBc at 1770 MHz

Depending on application, carrier powers and frequencies — PIM measurements can vary. PIM testing is not measured during product acceptance test.

OUTSTANDING PIM PERFORMANCE

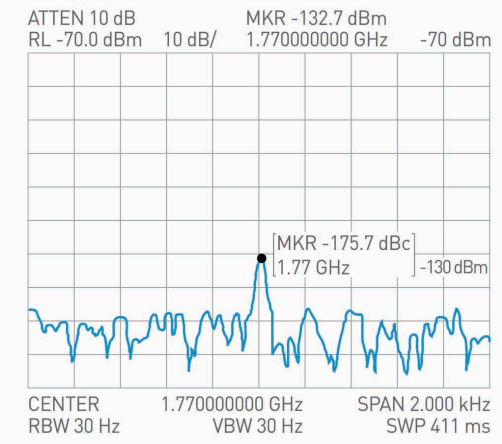


Notes

1. Reset: supply voltage time 1 sec. max./duty cycle 10%


TYPICAL RF PERFORMANCE

Example: SP6T N up to 12.4 GHz

INSERTION LOSS & ISOLATION

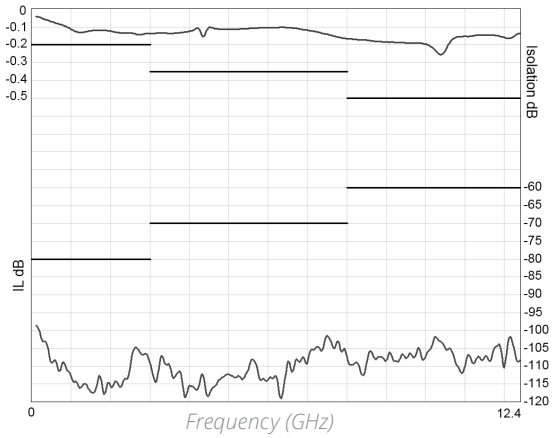


V.S.W.R

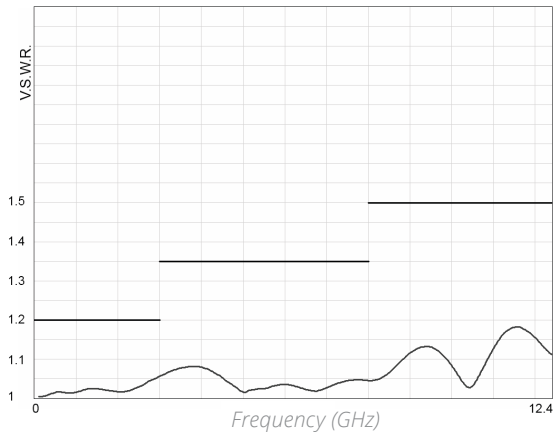


Example: SP6T SMA up to 18 GHz

INSERTION LOSS & ISOLATION

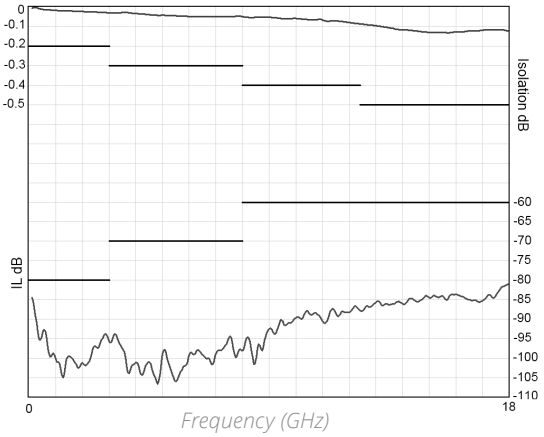


V.S.W.R

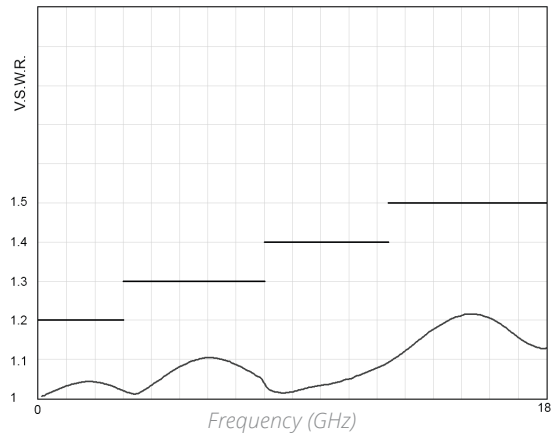

TYPICAL OUTLINE DRAWING

Example: SPnT SMA up to 18 GHz

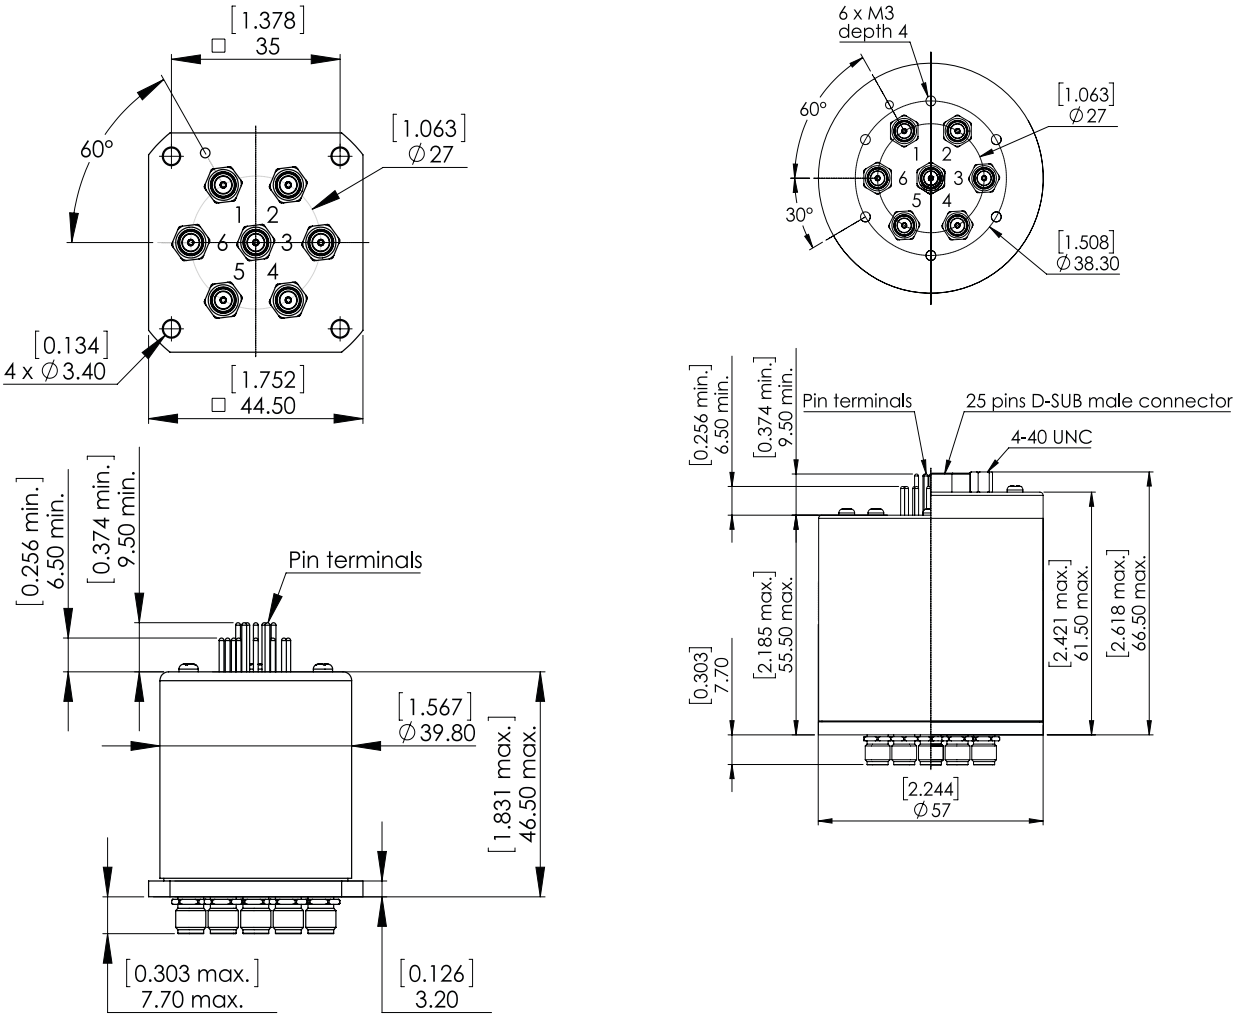

SOLDER PINS	Type 0 or 1 with option 0 - 1 - 3 or 4
	Type 2 or 3 with option 0 or 1


SOLDER PINS	Type 0 or 1 with option 2 or 8
	Type 2 or 3 with option 2 - 3 - 4 or 8
	Type 4 - 5 - 8 or 9 with option 0 - 2 or 8


D-SUB CONNECTOR	All models

Notes

All dimensions are in millimeters [inches].




Example: SPnT N up to 12.4 GHz

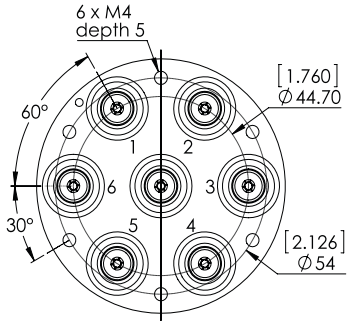



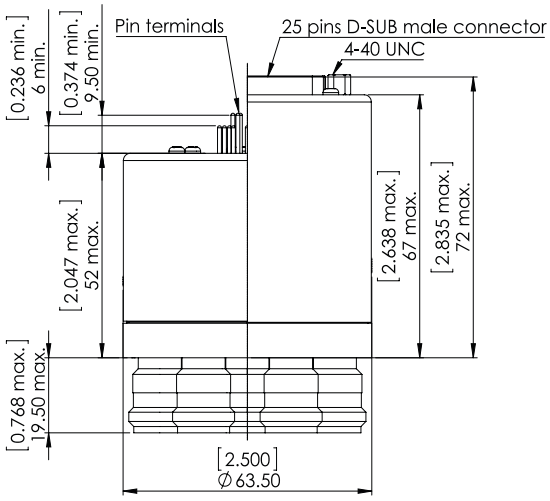


RF CONNECTOR ALLOCATION

SPnT 4 WAYS

SMA CONNECTORS		N CONNECTORS
		

SPnT 6 WAYS

SMA CONNECTORS		N CONNECTORS
		

Notes

All dimensions are in millimeters [inches].

COAXIAL LOW PIM SWITCHES - ELECTRICAL SCHEMATICS

TYPE		FAILSAFE	LATCHING		
Options		Without option	Without option	Cut-Off	C+ and suppression diodes
		Indicator contact	Indicator contact	Cut-Off and I.C.	C+, suppression diodes and I.C.
		Suppression diodes	Suppression diodes	Cut-Off and TTL Driver	C+ and Cut-Off
		Suppression diodes and I.C.	Suppression diodes and I.C.	Cut-Off, TTL and I.C.	C+, Cut-Off and I.C.
		TTL Driver	TTL Driver	C+	-
		TTL Driver and I.C.	TTL Driver and I.C.	C+ and I.C.	
Page Number	SPDT	See page 2-20	See page 2-21	See page 2-22	See page 2-23
	DPDT	See page 4-10	See page 4-11	See page 4-12	See page 4-13

TYPE		NORMALLY OPEN		LATCHING			
Options		Without option	BCD TTL driver	Without option	Cut-Off	TTL Driver, Cut-Off and Auto reset	C+ and suppression diodes
		Indicator contact	BCD TTL driver and I.C.	Indicator contact	Cut-Off and I.C.	TTL Driver, Cut-Off, Auto reset and I.C.	C+, suppression diodes and I.C.
		Suppression diodes	C+	Suppression diodes	Cut-Off and Auto reset	BCD TTL Driver, Cut-Off and Auto reset	C+, Cut-off and Auto reset
		Suppression diodes and I.C.	C+ and I.C.	Supression diodes and I.C.	Cut-Off, Auto reset and I.C.	BCD TTL Driver, Cut-Off, Auto reset and I.C.	C+, Cut-Off, Auto reset and I.C.
		TTL Driver	C+ and suppression diodes	TTL Driver	Cut-Off and TTL Driver	C+	-
		TTL Driver and I.C.	C+, suppression diodes and I.C.	TTL Driver and I.C.	Cut-Off, TTL and I.C.	C+ and I.C.	-
Page Number	SPnT	See page 5-47	See page 5-48	See page 5-49	See page 5-50	See page 5-51	See page 5-52



SPACE

Section 7 Table of Contents

INTRODUCTION

General Information 7-2
Radiall Specifications 7-3

FLIGHT MODELS

Low Power Coaxial SPDT Switch ..... 7-4 to 7-5
Low Power Coaxial DPDT Switch ..... 7-6 to 7-7
Low Power Coaxial T-Switch ..... 7-8 to 7-9
Low Power Coaxial DP3T Switch ..... 7-10 to 7-11
High Power Coaxial SPDT Switch ..... 7-12 to 7-13
High Power Coaxial T-Switch ..... 7-14 to 7-15
Quartz-S: SMT SPDT Switch ..... 7-16 to 7-17

THERMAL VACUUM SWITCHES FOR GROUND SEGMENTS

General Information ..... 7-18 to 7-20

Introduction



GENERAL INFORMATION

Radiall Hi-Rel switches are manufactured based on over 50 years of experience and thousands of products that have been designed, qualified, and delivered for both commercial and military applications. With a space heritage of over 35 years and products in flight on over 350 satellites around the world, Radiall guarantees the highest level of manufacturing, quality and reliability.

Radiall Hi-Rel coaxial switches have been fully evaluated and approved by the European Space Agency for Space use according to the generic specification ESCC3603. Radiall offers products tested at several levels based on the same hardware including:

- EM: Engineering Model
- QM: Qualification Model
- PFM: Proto Flight Model

Radiall also provides a full range of low cost Hi-Rel switches for space applications. These products meet the requirements for communication satellite applications according to RAD-GEN-SWIT-001 and follow detailed specifications according to the Radiall part number list (see page 7-3).

ENVIRONMENTAL CHARACTERISTICS

		QUALIFICATION LEVEL
Operation temperature range		- 30 °C/+ 85 °C
Non operation temperature range		- 40 °C/+ 85 °C
Vibration	Sinus	5 – 19 Hz/+10 mm 19 – 29 Hz/+ 6.4 mm 29 – 50 Hz/21 g 50 – 100 Hz/20 g
	Random	20 – 50 Hz/28.57 g 50 – 350 Hz/28.57 g 350 – 376 Hz/28.57 g 376 – 710 Hz/28.57 g 710 – 2000 Hz/28.57 g
Shocks	-	½ sinus / 1200 g / 0.25 ms
Pressure	-	Free space vacuum

RADIALL SPECIFICATIONS

RADIALL BEST RUNNERS PART LIST (FM P/N)

DETAIL SPECIFICATION	PRODUCT	POWER CAP.	CONNECTORS	DESIGNATION
RAD - DET - SPDT - 001	SPDT	Low power	SMA	Fixing plate with pins
				Lay down with pins
				Lay down with D-sub
			SMA 2.9	Fixing plate with pins
				Lay down with pins
				Lay down with D-sub
RAD - DET - SPDT - 002	SPDT	High power	TNC	Lay down with D-sub, High Cavity
				Lay down with D-sub, Standard Cavity
RAD - DET - DPDT - 006	DPDT	Low power	SMA	Stand up with D-sub
				Lay down with pins
				Stand up with pins
			SMA 2.9	Lay down with pins
				Stand up with D-sub
				Stand up with pins
RAD - DET - TSSD - 002	T-Switch Sequentiel	Low power	SMA	Lay down with pins
				Stand up with D-sub
				Stand up with pins
			SMA 2.9	Lay down with pins
				Stand up with pins
				Stand up with D-sub
RAD - DET - TRSD - 002	T-Switch	High power	TNC	Lay down with D-sub
				Stand up with D-sub
RAD - DET - TRSD - 003	T-Switch Random	Low power	SMA	Fixing plate with pins
				Lay down with pins
				Stand up with pins
			SMA 2.9	Lay down with pins
				Stand up with pins
				Stand up with D-sub
RAD - DET - DP3T - 001	DP3T	Low power	SMA	Lay down with D-sub
			SMA 2.9	Lay down with D-sub
RAD - DET - DP3T - 002	DP3T	High power	TNC	Lay down with D-sub, High Cavity
				Lay down with D-sub, Standard Cavity
				Lay down with pins, Standard Cavity

Flight Models



LOW POWER COAXIAL SPDT SWITCH

Low power latching Coaxial SPDT Switch according to Radiall specification RAD-DET-SPDT-001:

- DC to 22 GHz with SMA connectors
- Up to 31 GHz with SMA 2.9 connectors
- Telemetry circuit
- Suppression diodes
- D-Sub or solder pins
- Lay down or Fixing plate
- 44 grams and up
- External finishing: Surtech 650

GENERAL SPECIFICATIONS

	UNIT	MIN	TYPICAL	MAX
Actuation Voltage	V	+22	+26	+29
Pick-Up Voltage	V	-	-	+20.5
Actuation Current	mA	-	-	-
at +29 V, +25 °C		-	129	139
at +29 V, -30 °C		-	164	176
at +29 V, +85 °C		-	105	113
Switching Time	ms	-	-	20
Pulse Duration	ms	20	-	1000
Coil Resistance (at +25 °C)	Ω	210	225	-
RF Contact Resistance	mΩ	-	-	100
TLM Indicator Circuit	-	-	-	-
Contact Closed	mΩ	-	-	1000
Contact Open	MΩ	10	10	-
Contact Current	mA	-	-	100
Coil Isolation at 500 VDC	MΩ	10	-	-
Dielectric Withstanding at 50 or 60 Hz	Vrms	500	-	-
Mass	g	-	-	-
Variant 001-004: SPDT, Fixing Plate, Pins		-	-	44
Variant 002-005: SPDT, Lay down, Pins		-	-	62
Variant 003-006: SPDT, Lay down, D-Sub		-	-	72
Torque Screws for:	N.m	-	-	-
Fixing Unit		2	-	2.5
D-Sub Connector		0.27	-	0.44
SMA/SMA 2.9 Connector		0.8	-	1.15

RF PERFORMANCE

DC to 22 GHz SMA

FREQUENCY	GHZ	DC - 4.2	4.2 - 10.7	10.7 - 12.75	12.75 - 14.5	14.5 - 22
Insertion Loss (max)	dB	0.12	0.20	0.25	0.30	0.35
VSWR (max) Return Loss (min)	(dB)	1.20 (21)	1.20 (21)	1.20 (21)	1.25 (19)	1.33 (17)
Isolation (min)	dB	70			65	
E-Field Shielding Effectiveness (min)	dBi	75	70			


K_a – Band SMA 2.9

FREQUENCY	GHZ	17.5 - 21.5	21.5 - 27.5	27.5 - 31
Insertion Loss (max)	dB	0.45	0.45	0.50
VSWR (max) Return Loss (min)	(dB)	1.33 (17.0)	1.35 (16.5)	1.40 (15.6)
Isolation (min)	dB	65	60	55
E-Field Shielding Effectiveness (min)	dBi	70	60	
Power Handling (max)	W	10	5	

Flight Models

SCHEMATICS & DRAWINGS

SDPT, LAY DOWN, PINS:

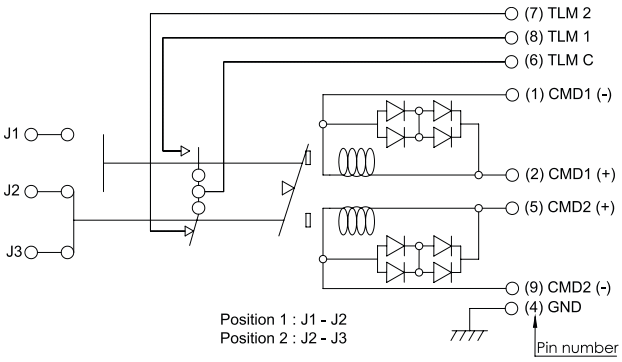



SPDT, fixing plate with pins



SPDT, lay down with D-sub




SPDT, lay down with pins

POWER DERATING GRAPH

VARIANT 001 TO 003: DC TO 22 GHz SMA

Power derating versus frequency

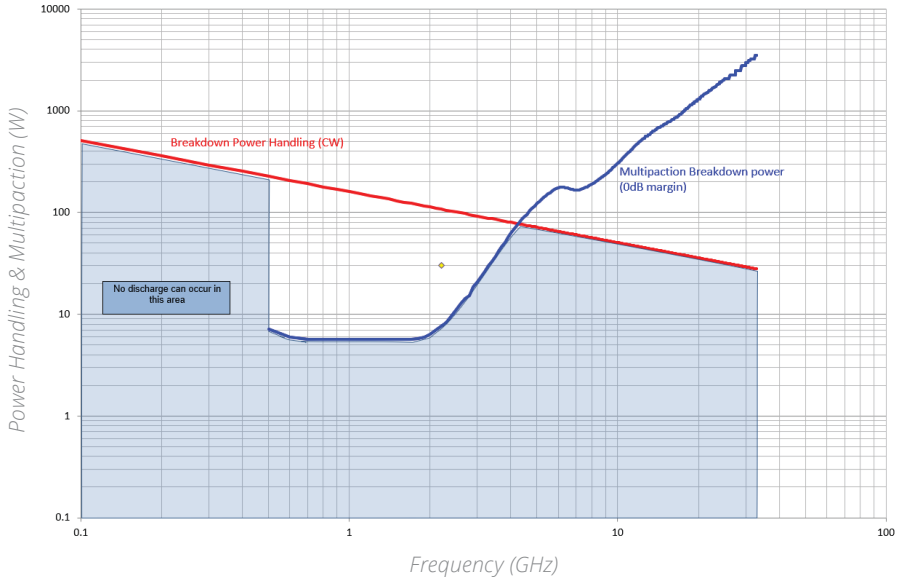

Frequency (GHz)	Breakdown Power Handling (W CW)	Breakdown multipaction Power (W)
0.5	226.27	7.13
0.7	191.24	5.74
1.0	160.00	5.74
1.8	119.26	5.74
2.0	113.14	6.40
2.2	107.87	7.63
2.4	103.28	9.65
2.6	99.23	12.60
2.8	95.62	15.21
3.0	92.38	20.74
3.2	89.44	26.32
3.4	86.77	33.31
3.6	84.33	41.33
3.8	82.08	51.10
4.0	80.00	62.81
4.2	78.07	74.13
4.4	76.28	85.86
4.6	74.60	94.83
4.8	73.03	110.14
5.0	71.55	122.69
5.2	70.16	134.73
5.4	68.85	146.65
5.6	67.61	155.75
5.8	66.44	167.83
6.0	65.32	173.90
6.2	64.26	178.76
6.4	63.25	175.87
6.6	62.28	172.52
6.8	61.36	167.79
7.0	60.47	165.48
8.0	56.57	189.02
9.0	53.33	235.68
10.0	50.60	305.46
12.0	46.19	489.09
14.0	42.76	670.45
16.0	40.00	822.43
18.0	37.71	1049.76
20.0	35.78	1310.97
22.0	34.11	1592.01
27.0	30.79	2261.91
28.0	30.24	2489.01
29.0	29.71	2728.68
30.0	29.21	2979.51
31.0	28.74	3124.81
32.0	28.28	3241.84
33.0	27.85	3515.68

Flight Models



LOW POWER COAXIAL DPDT SWITCH

Low power latching Coaxial DPDT Switch according to Radiall specification RAD-DET-DPDT-006:

- DC to 22 GHz with SMA connectors
- Up to 31 GHz with SMA 2.9 connectors
- Telemetry circuit
- Suppression diodes
- D-Sub or solder pins
- Lay down or Stand up
- 57 grams and up
- External finishing: Surtech 650

GENERAL SPECIFICATIONS

	UNIT	MIN	TYPICAL	MAX
Actuation Voltage	V	+22	+26	+29
Pick-Up Voltage	V	-	-	+20.5
Actuation Current	mA	-	-	-
at +29 V, +25 °C		-	129	139
at +29 V, -30 °C		-	164	176
at +29 V, +85 °C		-	105	113
Switching Time	ms	-	-	25
Pulse Duration	ms	20	-	1000
Coil Resistance (at +25 °C)	Ω	210	225	-
RF Contact Resistance	mΩ	-	-	100
TLM Indicator Circuit	-	-	-	-
Contact Closed	mΩ	-	-	1000
Contact Open	MΩ	10	-	-
Contact Current	mA	-	-	100
Coil Isolation at 500 VDC	MΩ	10	-	-
Dielectric Withstanding at 50 or 60 Hz	Vrms	500	-	-
Mass	g	-	-	-
Variant 001-005: C-Switch, Stand up D-Sub		-	-	80
Variant 002-004: C-Switch, Lay down Pins		-	-	57
Variant 003-006: C-Switch, Stand up Pins		-	-	63
Torque Screws for:	N.m	-	-	-
Fixing Unit		2	-	2.5
D-Sub Connector		0.27	-	0.44
SMA/SMA 2.9 Connector		0.8	-	1.15

RF PERFORMANCE

DC to 22 GHz SMA

FREQUENCY	GHZ	DC - 4.2	4.2 - 8.4	8.4 - 14.5	14.5 - 18	18 - 20	20 - 22
Insertion Loss (max)	dB	0.15	0.25	0.30	0.40	0.50	0.50
VSWR (max) Return Loss (min)	(dB)	1.20 (21)	1.25 (19)	1.25 (19)	1.33 (17)	1.33 (17)	1.40 (15.6)
Isolation (min)	dB	70			65		
E-Field Shielding Effectiveness (min)	dBi	75	70	68	65	60	


K_a – Band SMA 2.9

FREQUENCY	GHZ	17.5 - 21.5	27.5 - 31
Insertion Loss (max)	dB	0.50	0.65
VSWR (max) Return Loss (min)	(dB)	1.33 (17.7)	1.40 (15.6)
Isolation (min)	dB	65	60
E-Field Shielding Effectiveness (min)	dBi	60	60
Power Handling (max)	W	10	5

Flight Models

SCHEMATICS & DRAWINGS

C-SWITCH, SMA, LAY DOWN PINS:

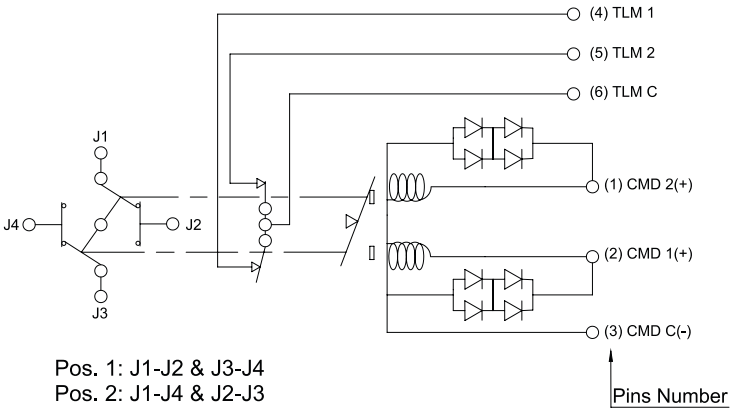




C-Switch, stand up with pins



C-Switch, lay down with pins

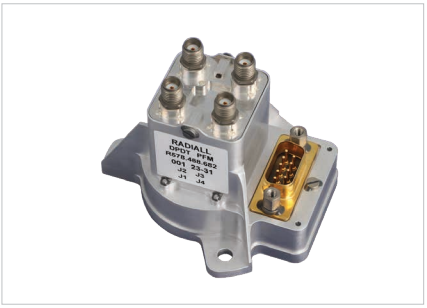


C-Switch, stand up with D-sub

POWER DERATING GRAPH

VARIANT 001 TO 003: DC TO 22 GHz SMA

Power derating versus frequency

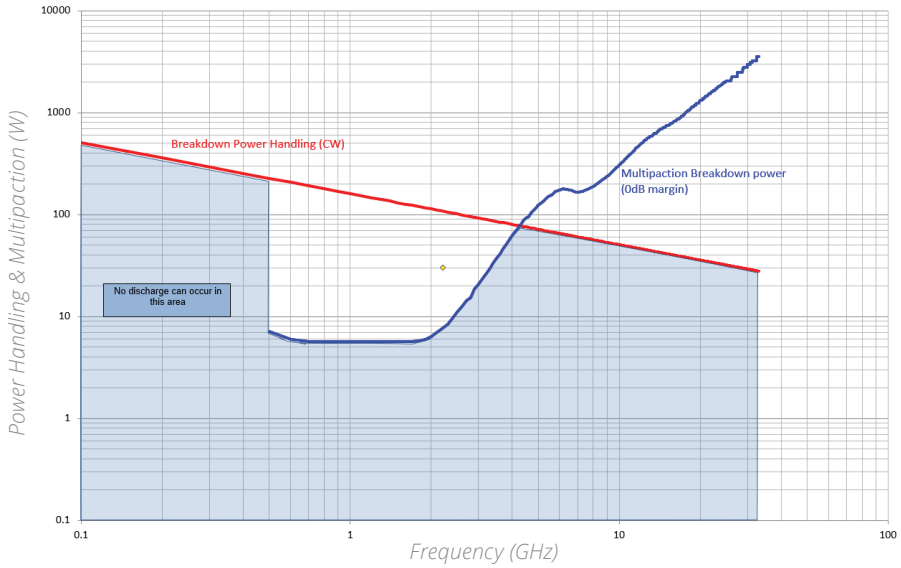

Frequency (GHz)	Breakdown Power Handling (W CW)	Breakdown multipaction Power (W)
0.5	226.27	7.13
0.7	191.24	5.74
1.0	160.00	5.74
1.8	119.26	5.74
2.0	113.14	6.40
2.2	107.87	7.63
2.4	103.28	9.65
2.6	99.23	12.60
2.8	95.62	15.21
3.0	92.38	20.74
3.2	89.44	26.32
3.4	86.77	33.31
3.6	84.33	41.33
3.8	82.08	51.10
4.0	80.00	62.81
4.2	78.07	74.13
4.4	76.28	85.86
4.6	74.60	94.83
4.8	73.03	110.14
5.0	71.55	122.69
5.2	70.16	134.73
5.4	68.85	146.65
5.6	67.61	155.75
5.8	66.44	167.83
6.0	65.32	173.90
6.2	64.26	178.76
6.4	63.25	175.87
6.6	62.28	172.52
6.8	61.36	167.79
7.0	60.47	165.48
8.0	56.57	189.02
9.0	53.33	235.68
10.0	50.60	305.46
12.0	46.19	489.09
14.0	42.76	670.45
16.0	40.00	822.43
18.0	37.71	1049.76
20.0	35.78	1310.97
22.0	34.11	1592.01
27.0	30.79	2261.91
28.0	30.24	2489.01
29.0	29.71	2728.68
30.0	29.21	2979.51
31.0	28.74	3124.81
32.0	28.28	3241.84
33.0	27.85	3515.68

Flight Models



LOW POWER COAXIAL T-SWITCH

Low power latching Coaxial Switch according to Radiall specification RAD-DET-TSSD-002 and RAD-DET-TSRD-003:

- Random or Sequential drive
- DC to 22 GHz with SMA connectors
- Up to 31 GHz with SMA 2.9 connectors
- Telemetry circuit
- Suppression diodes
- D-Sub or solder pins
- Stand up or Lay down or fixing plate
- 58 grams and up
- External finishing: Surtech 650

GENERAL SPECIFICATIONS

		RAD - DET - TSSD - 002 Requential Drive			*RAD - DET - TSRD - 003 Random Drive*		
	UNIT	**MIN**	**TYPICAL**	**MAX**	**MIN**	**TYPICAL**	**MAX**
Actuation Voltage	V	+22	+26	+29	+22	+26	+29
Pick-Up Voltage	V	-	-	+20.5	-	-	+20.5
Actuation Current	mA	-	-	-	-	-	-
at +29 V, +25 °C		-	345	364	-	285	305
at +29 V, -30 °C		-	439	462	-	365	390
at +29 V, +85 °C		-	280	295	-	234	250
Switching Time	ms	-	-	25	-	-	20
Pulse Duration	ms	20	-	1000	20	-	1000
Coil Resistance (at +25 °C)	Ω	79.8	84	-	88	95	-
RF Contact Resistance	mΩ	-	-	100	-	-	100
TLM Indicator Circuit	-	-	-	-	-	-	-
Contact Closed	mΩ	-	-	1000	-	-	1000
Contact Open	MΩ	10	-	-	10	-	-
Contact Current	mA	-	-	100	-	-	100
Coil Isolation at 500 VDC	MΩ	10	-	-	10	-	-
Dielectric Withstanding at 50 or 60 Hz	Vrms	500	-	-	500	-	-
Mass	g	-	-	-	-	-	-
T-Switch, Lay down Pins		-	-	73	-	-	64
T-Switch, Stand up D-Sub		-	-	100	-	-	100
T-Switch, Stand up Pins		-	-	75	-	-	75
T-Switch, Fixing Plate		-	-	-	-	-	58
Torque Screws for:	N.m	-	-	-	-	-	-
Fixing Unit		2	-	2.5	2	-	2.5
D-Sub Connector		0.27	-	0.44	0.27	-	0.44
RF Connector		0.8	1.1	1.15	0.8	1.1	1.15
SMA/SMA 2.9		0.8	-	1.15	0.8	-	1.15

RF PERFORMANCE

DC to 22 GHz SMA

FREQUENCY	**GHZ**	**DC-4.2**	**4.2-5.5**	**5.5-6.6**	**6.6-7.7**	**7.7-8.8**	**8.8-10.5**	**10.5-14.5**	**14.5-17.8**	**17.8-20**	**20-22**
Insertion Loss (max)	dB	0.15	0.17	0.18	0.21	0.24	0.30	0.35	0.45	0.50	0.50
VSWR (max) Return Loss (min)	(dB)	1.20 (21)	1.22 (20)	1.25 (19)	1.25 (19)	1.25 (19)	1.25 (19)	1.25 (19)	1.33 (17)	1.33 (17)	1.40 (15.6)
Isolation (min)	dB	70						65			
E-Field Shielding Effectiveness (min)	dBi	75			70		65	65			


K_a – Band SMA 2.9

FREQUENCY	**GHZ**	**17.5 - 21.5**	**27.5 - 31**
Insertion Loss (max)	dB	0.50	0.65
VSWR (max) Return Loss (min)	(dB)	1.33 (17)	1.40 (15.6)
Isolation (min)	dB	65	60
E-Field Shielding Effectiveness (min)	dBi	60	60
Power Handling (max)	W	10	5


Flight Models

SCHEMATICS & DRAWINGS

SEQUENTIAL DRIVE

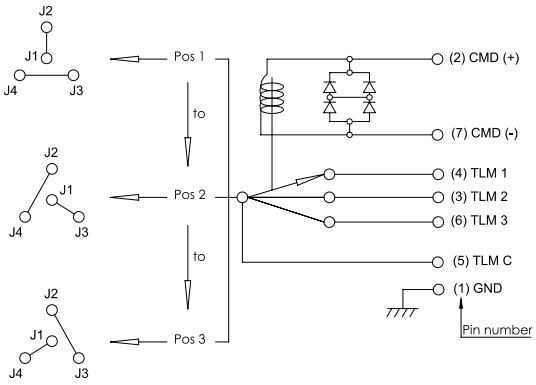

RANDOM DRIVE

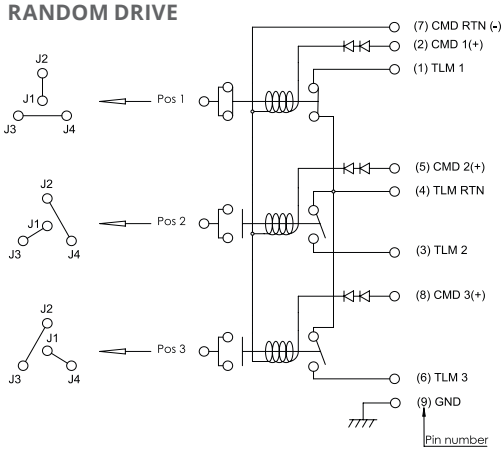



T-Switch, lay down with pins



T-Switch, stand up with D-Sub




T-Switch, fixing plate with pins

POWER DERATING GRAPH


VARIANT 001 TO 003: DC TO 22 GHz SMA

Power derating versus frequency

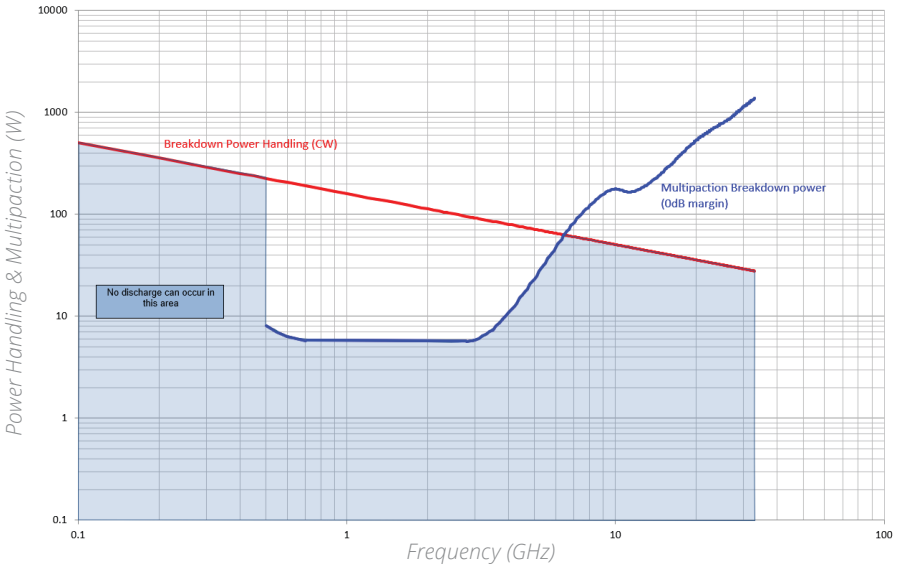

Frequency (GHz)	Breakdown Power Handling (W CW)	Breakdown multipaction Power (W)
0.5	226.27	8.10
0.7	191.24	5.66
1.0	160.00	5.66
1.8	119.26	5.66
2.0	113.14	5.66
2.2	107.87	5.66
2.4	103.28	5.66
2.6	99.23	5.66
2.8	95.62	5.66
3.0	92.38	5.88
3.2	89.44	6.40
3.4	86.77	7.12
3.6	84.33	8.10
3.8	82.08	9.38
4.0	80.00	11.05
4.2	78.07	12.60
4.4	76.28	15.21
4.6	74.60	17.31
4.8	73.03	20.74
5.0	71.55	23.41
5.2	70.16	27.98
5.4	68.85	32.38
5.6	67.61	37.16
5.8	66.44	41.33
6.0	65.32	48.46
6.2	64.26	53.97
6.4	63.25	62.81
6.6	62.28	68.36
6.8	61.36	76.98
7.0	60.47	82.85
8.0	56.57	122.69
9.0	53.33	158.13
10.0	50.60	178.03
12.0	46.19	173.37
14.0	42.76	225.00
16.0	40.00	305.46
18.0	37.71	418.69
20.0	35.78	538.77
22.0	34.11	649.38
27.0	30.79	889.83
28.0	30.24	985.73
29.0	29.71	1049.76
30.0	29.21	1148.41
31.0	28.74	1211.67
32.0	28.28	1310.97
33.0	27.85	1381.00

Flight Models

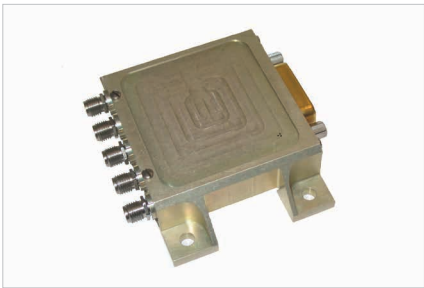

LOW POWER COAXIAL DP3T SWITCH

Low power latching Coaxial Switch according to Radiall specification RAD-DET-DP3T-001:

- DC to 22 GHz with SMA connectors
- DC to 31 GHz with SMA 2.9 connectors
- Telemetry circuit
- Suppression diodes
- D-Sub
- Lay down
- 106 grams
- External finishing: Surtech 650

GENERAL SPECIFICATIONS

	UNIT	MIN	TYPICAL	MAX
Actuation Voltage	V	+22	+26	+29
Pick-Up Voltage	V	-	-	+20.5
Actuation Current	mA	-	-	-
at +29 V, +25 °C		-	129	139
at +29 V, -30 °C		-	164	176
at +29 V, +85 °C		-	105	113
Switching Time	ms	-	-	20
Pulse Duration	ms	20	-	1000
Coil Resistance (at +25 °C)	Ω	210	225	-
RF Contact Resistance	mΩ	-	-	100
TLM Indicator Circuit	-	-	-	-
Contact Closed	mΩ	-	-	1000
Contact Open	MΩ	10	-	-
Contact Current	mA	-	-	100
Coil Isolation at 500 VDC	MΩ	10	-	-
Dielectric Withstanding at 50 or 60 Hz	Vrms	500	-	-
Mass	g	-	-	106
Torque Screws for:	N.m	-	-	-
Fixing Unit		2	-	2.5
D-Sub Connector		0.27	-	0.44
RF Connector		0.8	1.1	1.15
SMA/SMA 2.9		0.8	-	1.15

RF PERFORMANCE

DC to 22 GHz SMA


FREQUENCY	GHZ	DC - 4.2	4.2 - 10.7	10.7 - 12.75	12.75 - 14.5	14.5 - 22
Insertion Loss (max)	dB	0.12	0.20	0.25	0.30	0.35
VSWR (max) Return Loss (min)	(dB)	1.20 (21)	1.20 (21)	1.20 (21)	1.25 (19)	1.33 (17)
Isolation (min)	dB	70			65	
E-Field Shielding Effectiveness (min)	dBi	75	70			

K_a – Band SMA 2.9

FREQUENCY	GHZ	17.5 - 21.5	21.5 - 27.5	27.5 - 31
Insertion Loss (max)	dB	0.45	0.45	0.50
VSWR (max) Return Loss (min)	(dB)	1.33 (17)	1.35 (16.5)	1.40 (15.6)
Isolation (min)	dB	65	60	
E-Field Shielding Effectiveness (min)	dBi	70	60	
Power Handling (max)	W	10	5	

Flight Models

SCHEMATICS & DRAWINGS

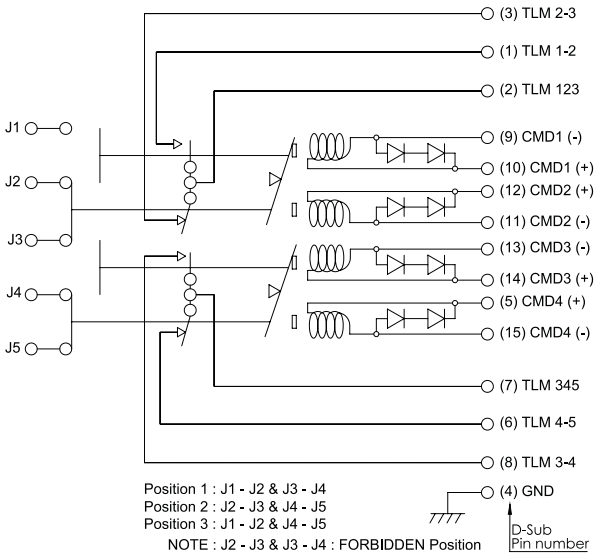




DP3T, lay down with D-sub

POWER DERATING GRAPH

VARIANT 001: DC TO 22 GHz SMA

Power derating versus frequency

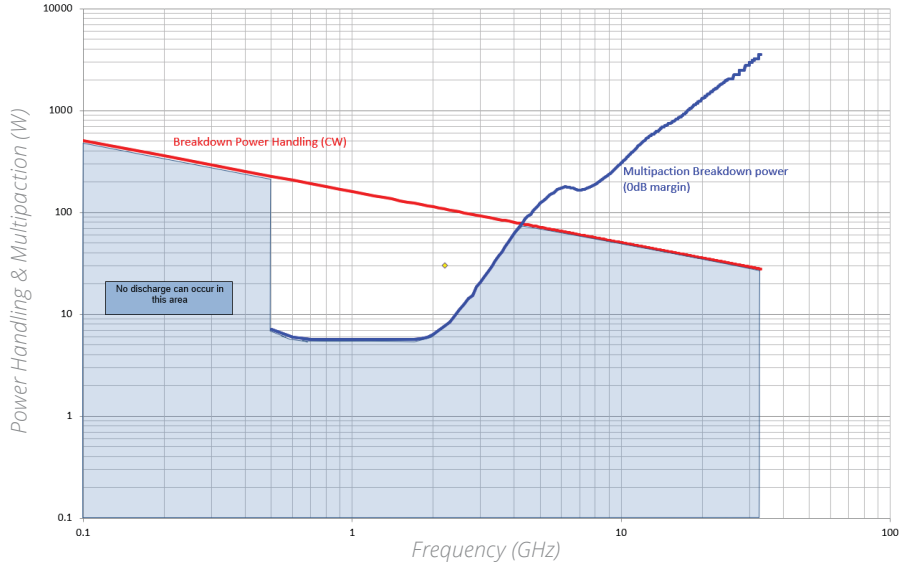

Frequency (GHz)	Breakdown Power Handling (W CW)	Breakdown multipaction Power (W)
0.5	226.27	7.13
0.7	191.24	5.74
1.0	160.00	5.74
1.8	119.26	5.74
2.0	113.14	6.40
2.2	107.87	7.63
2.4	103.28	9.65
2.6	99.23	12.60
2.8	95.62	15.21
3.0	92.38	20.74
3.2	89.44	26.32
3.4	86.77	33.31
3.6	84.33	41.33
3.8	82.08	51.10
4.0	80.00	62.81
4.2	78.07	74.13
4.4	76.28	85.86
4.6	74.60	94.83
4.8	73.03	110.14
5.0	71.55	122.69
5.2	70.16	134.73
5.4	68.85	146.65
5.6	67.61	155.75
5.8	66.44	167.83
6.0	65.32	173.90
6.2	64.26	178.76
6.4	63.25	175.87
6.6	62.28	172.52
6.8	61.36	167.79
7.0	60.47	165.48
8.0	56.57	189.02
9.0	53.33	235.68
10.0	50.60	305.46
12.0	46.19	489.09
14.0	42.76	670.45
16.0	40.00	822.43
18.0	37.71	1049.76
20.0	35.78	1310.97
22.0	34.11	1592.01
27.0	30.79	2261.91
28.0	30.24	2489.01
29.0	29.71	2728.68
30.0	29.21	2979.51
31.0	28.74	3124.81
32.0	28.28	3241.84
33.0	27.85	3515.68

Flight Models



HIGH POWER COAXIAL SPDT SWITCH

High power latching Coaxial SPDT Switch according to Radiall specification RAD-DET-SPDT-002:

- TNC connectors
- Up to 2.2 GHz, with 160 Watts CW
- Up to 4.8 GHz, with 150 Watts CW
- Telemetry circuit
- Suppression diodes
- D-Sub
- Lay down
- 275 g
- External finishing: Black paint PU1

GENERAL SPECIFICATIONS


	UNIT	MIN	TYPICAL	MAX
Actuation Voltage	V	+20	+26	+30
Pick-Up Voltage	V	-	-	+19
Actuation Current	mA	-	-	-
at +29 V, +25 °C		178	188	198
at +29 V, -30 °C		227	239	251
at +29 V, +85 °C		145	153	161
Switching Time	ms	-	25	35
Pulse Duration	ms	50	-	1000
Coil Resistance (at +25 °C)	Ω	152	160	168
RF Contact Resistance	mΩ	-	-	100
TLM Indicator Circuit	-	-	-	-
Contact Closed	mΩ	-	-	1000
Contact Open	MΩ	2	-	-
Contact Current	mA	-	-	100
Coil Isolation at 500 VDC	MΩ	1	-	-
Dielectric Withstanding at 50 or 60 Hz	Vrms	500	-	-
Mass	g	-	-	-
Variant 001		-	-	275
Variant 002		-	-	265
Torque Screws for:	N.m	-	-	-
Fixing Unit		2	-	2.5
D-Sub Connector		0.27	-	0.44
RF Connector TNC		-	2.65	-

RF PERFORMANCE

		DC - 2.2 GHz Variant 001			*DC - 4.8 GHz Variant 002*			
FREQUENCY	**GHZ**	**0.04 -1.0**	**1.0 - 1.6**	**1.6 - 2.2**	**0.04 - 1.0**	**1.0 - 1.6**	**1.6 - 2.2**	**2.2 - 4.8**
Insertion Loss (max)	dB	0.12			0.12			0.22
VSWR (max) Return Loss (min)	(dB)	1.20 (20.8)			1.20 (20.8)			1.38 (15.9)
Isolation (min)	dB	70						
E-Field Shielding Effectiveness (min)	dBi	70						60

Flight Models

SCHEMATICS & DRAWINGS

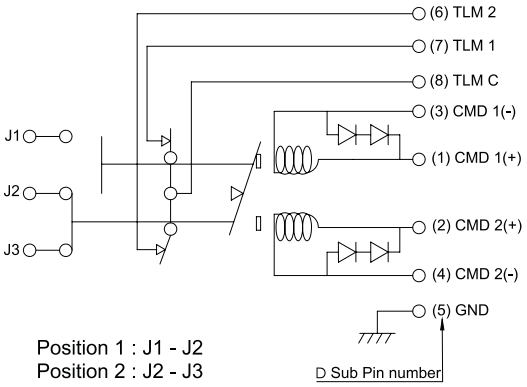




SPDT lay down with D-sub, variant 001 and 002

POWER DERATING GRAPH

VARIANT 001, HIGH CAVITY


Power derating versus frequency

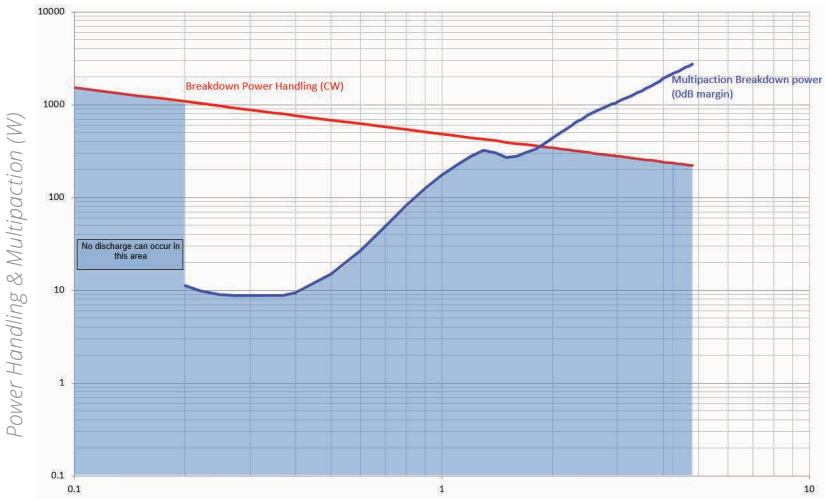

Frequency (GHz)	Breakdown Power Handling (W CW)	Breakdown multipaction Power (W)
0.3	880.00	9.65
0.5	681.65	14.90
0.7	576.10	48.02
1.0	482.00	173.76
1.8	359.26	332.72
2.0	340.82	435.83
2.2	324.96	562.64
2.4	311.13	693.52
2.6	298.92	834.97
2.8	288.05	951.59
3.0	278.28	1067.23
3.2	269.44	1190.08
3.4	261.40	1332.23
3.6	254.03	1491.99
3.8	247.26	1667.89
4.0	241.00	1911.04
4.2	235.19	2106.35
4.4	229.78	2304.73
4.6	224.73	2513.13
4.8	220.00	2728.68

VARIANT 002, STANDARD CAVITY

Power derating versus frequency

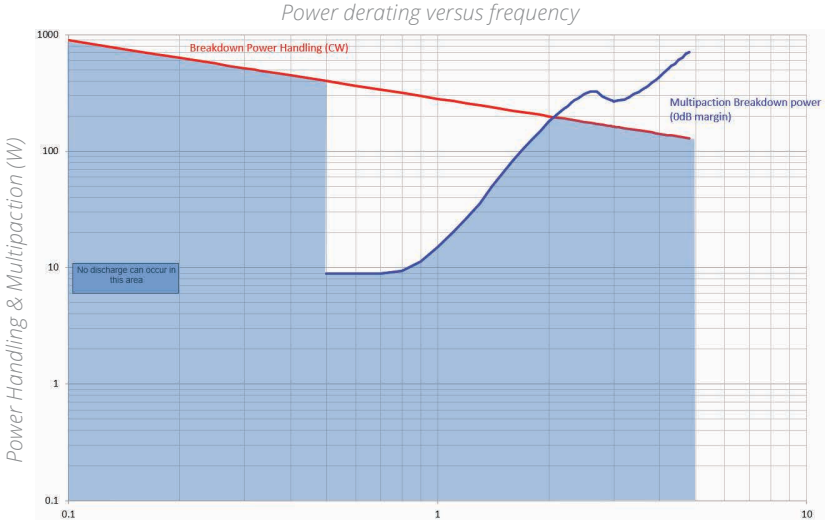

Frequency (GHz)	Breakdown Power Handling (W CW)	Breakdown multipaction Power (W)
0.5	398.70	8.85
0.7	336.96	8.85
1.0	281.92	14.90
1.8	210.13	125.08
2.0	199.35	178.88
2.2	190.07	231.85
2.4	181.98	284.74
2.6	174.84	323.14
2.8	168.48	296.05
3.0	162.77	267.65
3.2	157.60	277.91
3.4	152.89	308.53
3.6	148.59	341.60
3.8	144.62	387.25
4.0	140.96	435.83
4.2	137.56	498.18
4.4	134.40	562.64
4.6	131.45	636.75
4.8	128.68	708.19

Flight Models



HIGH POWER COAXIAL T-SWITCH

High power latching Coaxial T-Switch according to Radiall specification RAD-DET-TSRD-002:

- TNC connectors
- DC to 8 GHz
- Up to 120 Watts CW at 4 GHz
- Random Drive
- Telemetry circuit
- Suppression diodes
- D-Sub or solder pins
- Lay down or Stand up
- 355 grams and up
- External finishing: Black paint PU1

GENERAL SPECIFICATIONS

	UNIT	MIN	TYPICAL	MAX
Actuation Voltage	V	+22	+26	+29
Pick-Up Voltage	V	-	-	+20.5
Actuation Current	mA	-	-	-
at +29 V, +25 °C		450	470	490
at +29 V, -25 °C		555	585	610
at +29 V, -30 °C		570	595	620
at +29 V, +80 °C		360	385	405
at +29 V, -85 °C		365	380	397
Switching Time	ms	-	-	35
Pulse Duration	ms	35	-	1000
Coil Resistance (at +25 °C)	Ω	59.3	61.8	64.4
RF Contact Resistance	mΩ	-	-	100
TLM Indicator Circuit	-	-	-	-
Contact Closed	mΩ	-	-	1000
Contact Open	MΩ	1	-	-
Contact Current	mA	-	-	100
Coil Isolation at 500 VDC	MΩ	1	-	-
Dielectric Withstanding at 50 or 60 Hz	Vrms	500	-	-
Mass	g	-	-	-
Variant 001: T-Switch, Lay down, D-Sub		-	-	360
Variant 002: T-Switch, Stand up, D-Sub		-	-	355
Torque Screws for:	N.m	-	-	-
Fixing Unit		2	-	2.5
D-Sub Connector		0.27	-	0.44
RF Connector TNC		1.7	-	2.65

RF PERFORMANCE


DC - 8 GHz Variants 001 and 002

FREQUENCY	GHZ	DC - 2	2 - 4.8	4.8 - 6	6 - 8
Insertion Loss (max)	dB	0.17	0.20	0.30	0.40
VSWR (max) Return Loss (min)	(dB)	1.10 (26.4)	1.25 (19.1)	1.35 (16.5)	1.50 (14)
Isolation (min)	dB	70			
E-Field Shielding Effectiveness (min)	dBi	75			70

Flight Models

SCHEMATICS & DRAWINGS

T-SWITCH, TNC, D-SUB, VARIANT 001 & 002:

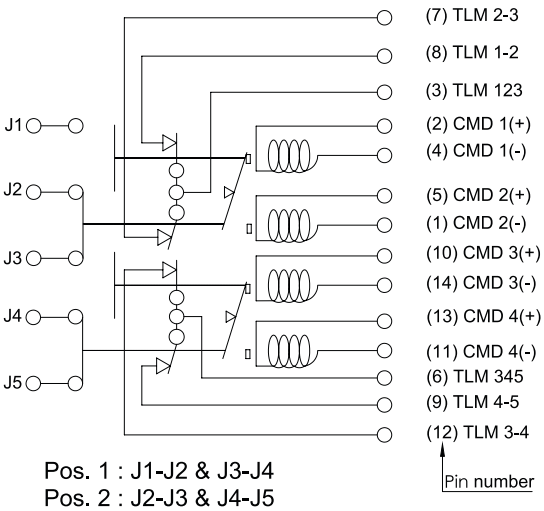

Pos. 1 : J1-J2 & J3-J4
Pos. 2 : J2-J3 & J4-J5
Pos. 3 : J1-J2 & J4-J5
Note : J2-J3 & J3-J4 : FORBIDDEN POSITION




T-Switch, Lay down with D-sub, variant 001



T-Switch, Stand up with D-sub, variant 002

POWER DERATING GRAPH

Power derating versus frequency

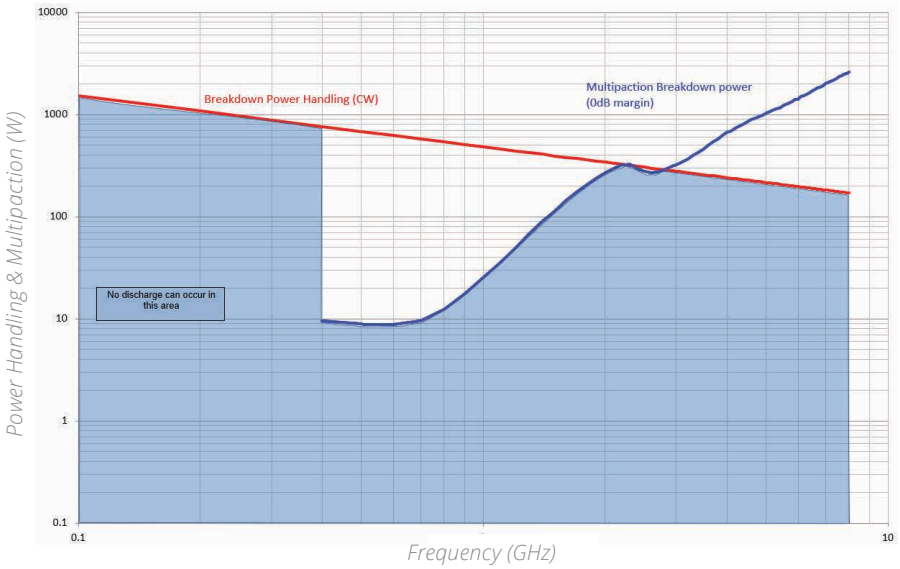

Frequency (GHz)	Breakdown Power Handling (W CW)	Breakdown multipaction Power (W)
0.4	762.10	9.80
0.5	681.65	9.80
0.7	191.24	9.61
1.0	160.00	25.11
1.8	119.26	204.92
2.0	113.14	269.19
2.2	107.87	322.13
2.4	103.28	296.05
2.6	99.23	269.12
2.8	95.62	288.83
3.0	92.38	320.16
3.2	89.44	368.97
3.4	86.77	426.84
3.6	84.33	498.18
3.8	82.08	579.36
4.0	80.00	664.69
4.2	78.07	737.99
4.4	76.28	804.37
4.6	74.60	893.65
4.8	73.03	951.59
5.0	71.55	1035.55
5.2	70.16	1096.45
5.4	68.85	1157.53
5.6	67.61	1253.16
5.8	66.44	1332.23
6.0	65.32	1410.10
6.2	64.26	1533.80
6.4	63.25	1622.05
6.6	62.28	1761.48
6.8	61.36	1860.51
7.0	60.47	2011.07
8.0	56.57	2619.80

Flight Models



QUARTZ-S: SMT SPDT SWITCH

Electro-mechanical miniature surface mounted according to ESCC specification (3603/007):

- DC to 32 GHz
- SPDT Surface Mounted Technology
- 6V or 12V
- Latching model without telemetry
- Waterproof (IP 67)
- Operating life: up to 250000 actuation cycles cold, up to 50000 actuation cycles hot
- Small and light (10 grams)

GENERAL SPECIFICATIONS

6 V Model

	UNIT	MIN	TYPICAL	MAX
Actuation Voltage	V	5.1	6	6.6
Pick-Up Voltage	V	-	-	5.1
Actuation Current	mA	-	-	-
at -40 °C		-	-	154
at +23 °C		-	-	118
at +85 °C		-	-	97
Switching Time	ms	-	-	-
Making Contact		-	-	5
Breaking Contact		-	-	3
Pulse Duration	ms	10	-	1000
Coil Resistance	Ω	-	-	-
at -40 °C		39	-	46
at +23 °C		49	-	60
at +85 °C		61	-	72
RF Contact Resistance	mΩ	-	-	100
Coil Isolation at 500 VDC	MΩ	100	-	-
Dielectric Withstanding at 50 or 60 Hz	Vrms	300	-	-
Mass	g	-	-	10

12 V Model

	UNIT	MIN	TYPICAL	MAX
Actuation Voltage	V	10.2	12	13
Pick-Up Voltage	V	-	-	10.2
Actuation Current	mA	-	-	-
at -40 °C		-	-	83
at +23 °C		-	-	63
at +85 °C		-	-	52
Switching Time	ms	-	-	-
Making Contact		-	-	5
Breaking Contact		-	-	3
Pulse Duration	ms	10	-	1000
Coil Resistance	Ω	-	-	-
at -40 °C		189	-	221
at +23 °C		145	-	171
at +85 °C		232	-	271
RF Contact Resistance	mΩ	-	-	100
Coil Isolation at 500 VDC	MΩ	100	-	-
Dielectric Withstanding at 50 or 60 Hz	Vrms	300	-	-
Mass	g	-	-	10

Flight Models


RF PERFORMANCE


6 V and 12 V Models

FREQUENCY	GHZ	DC - 3	3 - 6	6 - 8	8 - 12.4	12.4 - 15	15 - 32
Insertion Loss (max)	dB	0.20	0.40	0.50	0.60	0.70	0.80
VSWR (max) Return Loss (min)	(dB)	1.25 (-19 dB)					
Isolation (min)	dB	45					
RF Shielding Effectiveness (min)	dBi	-40			-20	-20	-30
Impedance	Ohms	50					

TYPICAL OUTLINE DRAWING


All dimensions are in millimeters [inches].

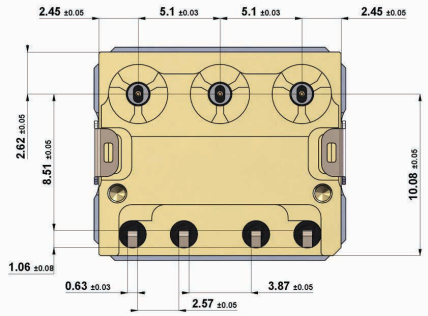

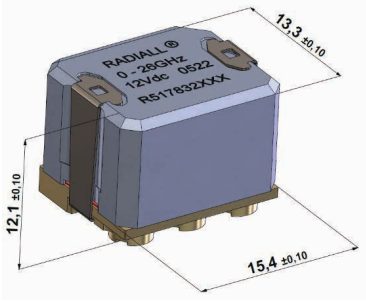

SCHEMATICS & DRAWINGS


QUARTZ-S LATCHING MODEL



VOLTAGE		RF CONTINUITY
-1	+1	C <--> 1
-2	+2	C <--> 2

POWER DERATING GRAPH

QUARTZ-S 6V AND 12V MODELS UP TO 32 GHz

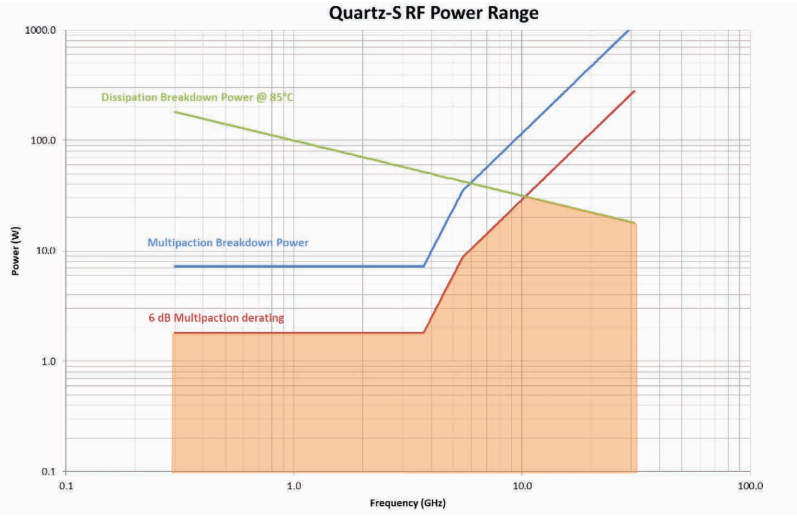

Thermal Vacuum Switches for Ground Segments



GENERAL INFORMATION

Radiall has developed a product offering that emphasizes reliability and performance. The latest addition to the range includes SPDT, DPDT and SPnT RF switches designed to operate in thermal vacuum environments. These products can be mounted on ground based test benches, used in test equipment, and space vacuum conditions.

Tvac Series switches are designed in accordance with our standard RAMSES product offering and offer identical configurations with excellent performance.

PART NUMBER SELECTION

"6 standard models are available for test benches dedicated to space equipment in Thermal Vacuum environments"

- 22 GHz SPDT coaxial switch: R571 F63 121
- 22 GHz DPDT coaxial switch: R578 F63 121
- 22 GHz non-terminated SP6T coaxial switch: R583 F33 121
- 40 GHz SPDT coaxial switch: R571 863 121
- 40 GHz DPDT coaxial switch: R578 863 121
- 40 GHz non-terminated SP6T coaxial switch: R583 833 121

OPERATING MODE	LATCHING	
Nominal operating voltage (across operating temperature)	Vdc	28 (24/30)
Coil resistance (+/-10%)	Ω	DPDT and SP6T: 225 / SPDT: 350
Nominal operating current at 23°	mA	DPDT and SP6T: 125 / SPDT: 80
Average power (Thermal vacuum condition)	See power rating chart on page 7-20	
Switching time (max)	SPDT and DPDT: 10 ms / SP6T: 15 ms	
SMA - SMA 2.9	SPDT	10 million cycles
SMA - SMA 2.9	DPDT	2.5 million cycles
SMA - SMA 2.9	SP6T	5 million cycles / 2 million cycles
Connectors [1]	SMA / SMA 2.9	

Notes

Terminated models are also available
SPnT models are only available with separated reset option
1. Connector SMA 2.9 is equivalent to "K connector®", registered trademark of Anritsu.

Thermal Vacuum Switches for Ground Segments

ADDITIONAL SPECIFICATION

POLARITY		POSITIVE COMMON
Actuator terminals	SPDT	Solder Pins
	DPDT	Male 9 pins D-Sub connector
	SP6T	Male 25 pins D-Sub connector
Operating temperature range		-40 °C to 85 °C
Storage temperature range		-55 °C to 85 °C
Construction		Thermal vacuum compatible

SMA CONNECTOR

SWITCH MODEL	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	IMPEDANCE Ω	AVERAGE POWER [1] W	REPEATABILITY
SPDT	DC – 22	DC - 3	1.20	0.20	80	50	240	0.03 dB peak change in Insertion Loss over 100 cycles
		3 - 8	1.30	0.30	70		150	
		8 - 12.4	1.40	0.40	60		120	
		12.4 - 18	1.50	0.50	60		100	
		18 - 22	1.70	0.70	55		40	
DPDT SP6T (non-terminated)	DC – 22	DC - 3	1.20	0.20	80	50	240	
		3 - 8	1.30	0.30	70		150	
		8 - 12.4	1.40	0.40	60		120	
		12.4 - 18	1.50	0.50	60		100	
		18 - 22	1.70	0.70	50		40	

SMA 2.9 CONNECTOR

SWITCH MODEL	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	IMPEDANCE Ω	AVERAGE POWER [1] W	REPEATABILITY
SPDT DPDT	DC – 40	DC - 6	1.30	0.30	70	50	80	0.03 dB peak change in Insertion Loss over 100 cycles
		6 - 12.4	1.40	0.40	60		60	
		12.4 - 18	1.50	0.50	60		50	
		18 - 26.5	1.70	0.70	55		20	
		26.5 - 40	1.90	0.90	50		10	
SP6T (non-terminated)	DC – 40	DC - 6	1.30	0.30	70	50	40	
		6 - 12.4	1.40	0.40	60		30	
		12.4 - 18	1.50	0.50	60		25	
		18 - 26.5	1.70	0.70	55		15	
		26.5 - 40	1.90	0.90	50		5	

WHY A THERMAL VACUUM TEST BENCH?

- It limits the need of hermetic adaptors and cable assemblies
- It improves RF performance
- It decreases the complexity of the Test bench


Notes

1. Average power at 25 °C per RF path / Sea level.

POWER DERATING GRAPH


SPDT, DPDT AND SP6T SMA 22 GHz

Multipactor and Power handling under vacuum (max value)

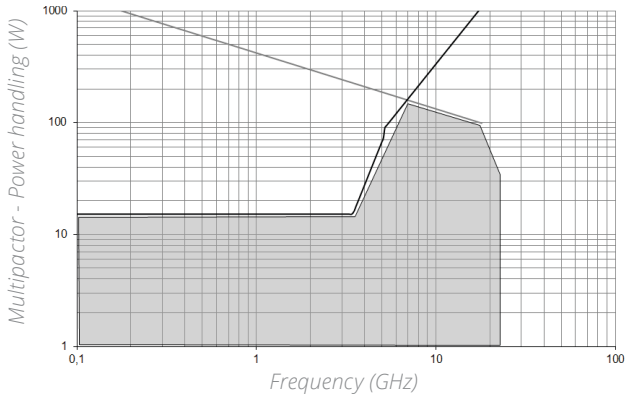


SPDT SMA 2.9 40 GHz

Multipactor and Power handling under vacuum (max value)

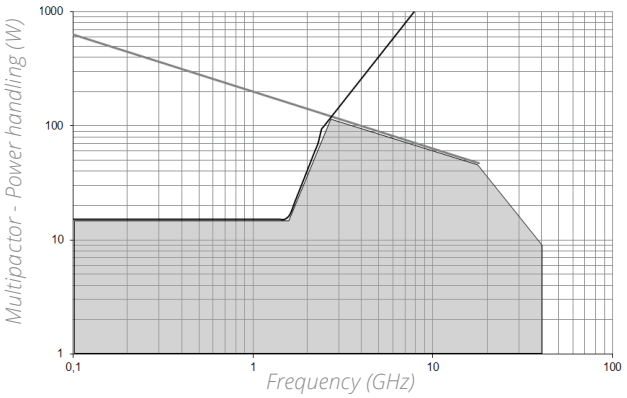


DPDT SMA 2.9 40 GHz

Multipactor and Power handling under vacuum (max value)

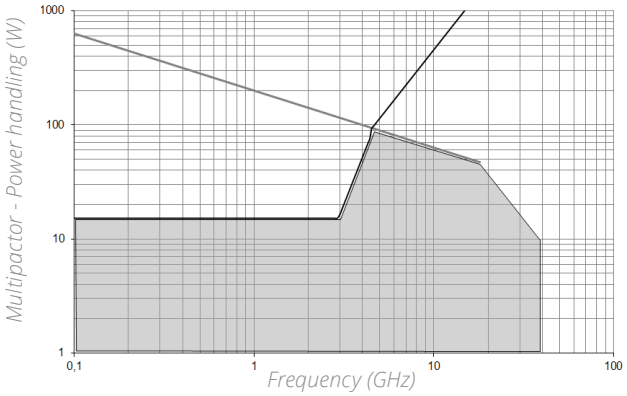

SP6T SMA 2.9 40 GHz

Multipactor and Power handling under vacuum (max value)

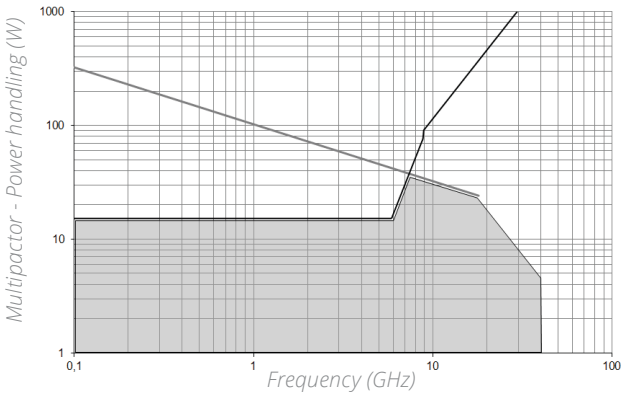

POWER HANDLING
MULTIPACTOR
AVER. POWER CAPABILITY

HERMETIC FEMALE/FEMALE ADAPTORS FOR THERMAL VACUUM CHAMBER



Multipactor Threshold	-	-	-
L Band 2 GHz	≥2000	Wpp	Max. tested values, pulse width 20 µs; PRF 1000 Hz
C Band 3.5 GHz	≥2000	Wpp	
Power Handling	-	-	-
L Band 2 GHz	600	WCW	-
C Band 3.5 GHz	400	WCW	-

- VHP TNC DC - 3.5 GHz
- High reliability

OTHER

Section 8 Table of Contents

OTHER COMPONENTS

RF and Microwave Coaxial Products ..... 8-2 to 8-3
TestPro Cable Assemblies..... 8-4
Quantum Technologies ..... 8-5 to 8-6
Space Qualified Products..... 8-7 to 8-8
Switch Applications..... 8-9 to 8-10

Other Components

RF & MICROWAVE COAXIAL PRODUCTS

GENERAL INFORMATION

Specialized in passive RF & Microwave components, Radiall's engineering staff develops and manufactures a wide range of other coaxial standard devices including: terminations, attenuators, power dividers, coaxial couplers, detectors, rotary joints, phase shifters and filters. This range covers a wide frequency spectrum from DC to 67 GHz for telecom, aerospace, instrumentation and military application.

Radiall introduced TestPro cable assemblies into the market for Test & Measurement applications, in order to meet customers' needs.

For Space applications, Radiall also offers a full range of space components built according to ESA specifications including; attenuators, terminations, couplers, connectors, coaxial cable assemblies (flexible or semi-rigid cables) for L, S, C, X, Ku and K_a band applications.

TERMINATIONS

Radiall's range of terminations is intended to terminate a coaxial transmission through characteristic impedance and dissipating the RF incident power. The main features of our full range of terminations include:

- Power range from 0.5 W to 1000 W
- Frequency from DC up to 67 GHz
- 50 and 75 Ω Impedance
- High repeatability
- Compatibility with Broad type connections: BMA, BNC, QMA, QN, N, SMA, SMA 2.9, SMA 3.5, SMB, SMP, SSMA, TNC, 1.0/2.3, 7/16, 2.4 mm, 1.85 mm
- Dedicated range to Low PIM with 4.3/10 and Nex10 connectors
- Connector interface according to applicable MIL, DIN, NF and CEI
- Dedicated range for Test & Measurement with the lowest VSWR



ATTENUATORS

Attenuators are linear passive transition line components designed to be inserted between two coaxial lines to reduce the input power in a matched system by a predetermined ratio. This ratio is expressed in logarithmic terms. 3 dB as a power ratio is 2, 6 dB is 4, 20 dB is 100, and 30 dB is 1,000. The main features of our full range of coaxial attenuators include:

- Power range from 1 W to 150 W
- Frequency from DC up to 67 GHz
- High repeatability
- 50 Ω Impedance
- Compatibility with Broad type connections : BMA, BNC, QMA, QN, N, SMA, SMA 2.9, SMA 3.5, SMB, SMP, SSMA, TNC, 1.0/2.3, NEX10, 4.3/10, 7/16, 2.4 mm, 1.85 mm
- Connector interface according to applicable MIL, DIN, NF and CEI
- Dedicated range for Test & Measurement with the lowest VSWR









Other Components

COAXIAL COUPLERS

Radiall's coaxial couplers offer a reliable design to meet the needs of microwave applications. The main features of our full range of coaxial couplers include:





- Directional and 3dB Hybrid 90° couplers
- Power range from 20 to 500 Watts
- Frequency from 0.15 GHz to 18 GHz
- 6, 10, 20 and 30 dB coupling factors
- SMA, Type N offered, TNC 7/16
- Dedicated range providing flat frequency response
- Compliant with MILSTD202 environmental testing
- Possibility to design custom coaxial couplers as per customer requirements

SPECIAL MICROWAVE COMPONENTS

Radiall offers a complete range of special Microwave components suitable for applications utilizing the following devices:



- Power dividers
- Feedthrough terminations
- Detectors
- Rotary joints
- DC Blocks
- Monitor tees
- Signal samplers
- Phase shifters
- Filters

Power dividers

These devices are used to divide or combine 2, 3, 4, 6 or 8 ways of RF signal from a coaxial line.



Feed through terminations

These components are used to properly terminate a transmission line while testing with a high impedance measuring system such as an oscilloscope input.

Detectors

A detector is a two port device capable of supplying a low frequency signal on its output port (video), of a level proportional to the RF power applied to its input port.

Rotary joints

These components provide the transition between two coaxial transmission lines that rotate while maintaining necessary RF characteristics.

DC blocks

DC blocks are composed of a capacitor inserted to the central conductor of the coaxial line. They block any DC or low frequency current present in the line.

Signal samplers

These devices are used to sample part of an RF signal from a coaxial line. They are not directive, and the sample incident reflects energy.

Phase shifters

These components create a mechanical adjustable phase shift by variation in the physical length of the transmission line.

Other Components

TESTPRO CABLE ASSEMBLIES



TestPro cables are dedicated to bench test cable assemblies. Our TestPro range differs from the SHF range, because the cables and connectors are designed for high performance and testing and measurement.

While others propose cosmetic solutions to appear more robust without any real performance advantages, Radiall's design offers a full range of test bench cables that performs better than any other product on the market.

Test cable assemblies are intended for daily use in component and assembly shops, test labs and automatic test equipment applications. They differ from standard cable assemblies in that they are specifically designed for applications that require repeated connect/disconnect procedures, strenuous flexing situations and applications where cable and connector durability is important.

Key characteristics of the TestPro range include:


- Rugged interface: 5000 mating/unmating lifecycle
- Flex life: over 20000 cycles
- High flexibility
- Outstanding phase and loss stability for long calibration intervals

	TESTPRO 4.2	TESTPRO 3	TESTPRO 2
Frequency	DC - 18 GHz	DC - 26.5 GHz / DC- 40 GHz	DC – 50 GHz / DC – 67 GHz
Impedance	50 Ω ± 2 Ω	50 Ω ± 1 Ω	50 Ω ± 1 Ω
IL (dB/m)	2.10 at 18 GHz	2.41 at 26.5 GHz - 3.11 at 40 GHz	5.00 at 50 GHz – 5.92 at 67 GHz
Test IL (dB/ft)	0.64 at 18 GHz	0.73 at 26.5 GHz - 0.94 at 40 GHz	1.52 at 50 GHz – 1.80 at 67 GHz
Phase with flexure stability	2° at 18 GHz	2° at 26.5 GHz - 5° at 40 GHz	6° at 50 GHz - 8° at 67 GHz
Amplitude stability (dB)	0.05 at 18 GHz	0.05 at 40 GHz	0.05 at 50 GHz
Shielding Effectiveness	-110 dB min at 1 GHz	-100 dB min at 1 GHz	-100 dB min at 1 GHz
Crush resistance	135 lb / linear in.	260 lb / linear in.	260 lb / linear in.
Minimum bend radius	25 mm (1 in.)	25 mm (1 in.)	25 mm (1 in)
Temperature (°C)	-55 / + 125 °C	-55 / + 125 °C	-55 / + 125 °C
Connectors	SMA, N, TNC, PC7	SMA 3.5, SMA 2.9, NMD 2.9, TVAC 2.9, SMA 2.4 mm, N	2.4 mm/1.85 mm
Flexure life cycle	10000	20000	20000
Mating cycles durability	5000	5000	5000
Armor	Available	Integrated	Integrated
RoHS/REACH	Yes	Yes	Yes

Notes

Please refer to TestPro catalog D1A295TE.

Other Components

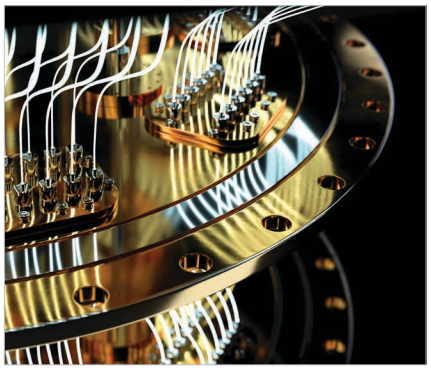


QUANTUM TECHNOLOGIES

Quantum computers are accelerating the transformation of various industries like aeronautic conception and design, health care and life science, financial services and manufacturing efficiency and productivity. To support the growing quantum technologies, Radiall is working with R&D, laboratories, start-ups and others to create new interconnect solutions that are tested in-house and qualified in accredited labs. Radiall's interconnect offering brings together a solution of RF cable assemblies, connectors, attenuators, switches and fiber optics to emerging technology to solve application challenges like densification, thermalisation to some tens of milliKelvin, networking and integration, miniaturization and non-magnetism.

Radiall semi-rigid cables assemblies use proprietary/specific technologies to withstand the lower temperatures up to tens of millikelvin. Theses technologies have been proven in laboratory and in field. With cables in .047" (and .033" - .013" uner development), we have SMA, SMPM and multiport coax connector solutions. Stage interface could use Radiall attenuators (0-30 dB on request):

- Room temperature long semi-rigid, precise bending shape
- 4°K: Cable with good thermal isolation, CuproNickel CuN semi-rigid cables
- 1°K: Cable with superior thermal isolation, superconducting semi-rigid cables in Niobium Titanium (NbTi)
- 10°mK: Highly conductive, close to qubit, lower temperature, amagnetic, hand formable cable assembly in Copper Silver (CuPro)

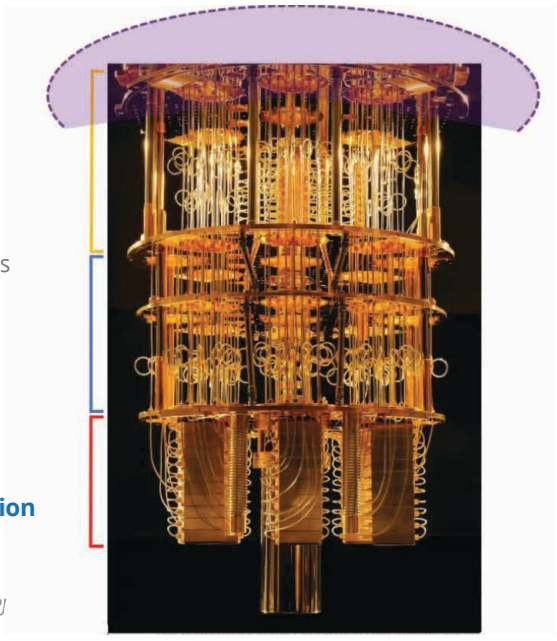

DILUTION REFRIGERATOR (DR)

Room Temperature Long Semi-rigid
> 4°K: Good Thermal Isolation
1°K - 4°K: Superior Thermal Isolation
< 1°K: Highly Conductive

Source: Krinner, S., Storz, S., Kurpiers, P., Magnard, P., Heinsoo, J., Keller, R., Luetolf, J., Eichler, C. and Wallraff, A., 2019. Engineering cryogenic setups for 100-qubit scale superconducting circuit systems. EPJ Quantum Technology, 6(1), p.2.

VARIOUS OFFERS OF CRYOGENIC RADIALL DEVICES



RF SWITCHES

With cryogenic switches, Radiall provides a solution to meet emerging market demands. These switches function at extremely low temperatures (0 Kelvin/-273 °C) and actuate at very low power. They can be easily integrated into equipment and are a perfect solution for a variety of laboratory applications.

PART NUMBER	DESCRIPTION
R583423141	Specific SP6T Ramses SMA 18 GHz Latching 28 Vdc D-SUB Male Connector Bipolar Actuator Command for Cryogenic Application
R571433141	Specific SPDT Ramses SMA 18 GHz Latching 28 Vdc Pins Terminals Bipolar Actuator Command for Cryogenic Application
R5927B2141	Specific SP6T Ramses Sub-Miniature SMA 26.5 GHz Latching 12 Vdc Pins Terminals Bipolar Actuator Command for Cryogenic Application

Other Components



RF ATTENUATORS

In quantum computing, cryogenic microwave attenuators are used in different stages of the thermal dilution refrigerator to reduce the thermal noise in the signal. The RF lines within each layer increases the signal-to-noise ratio (SNR), requiring the attenuator for the thermalized layer to protect the signal level.

PART NUMBER	DESCRIPTION
R429800000	SMA Attenuator 0 dB 18 GHz 2 W
R429803000	SMA Attenuator 3 dB 18 GHz 2 W
R429806000	SMA Attenuator 6 dB 18 GHz 2 W
R429810000	SMA Attenuator 10 dB 18 GHz 2 W
R429820000	SMA Attenuator 20 dB 18 GHz 2 W
R438538101	Infrared Filter 2 dB
R438538100	Infrared Filter 0.5 dB


RF CABLES, CONNECTORS & ASSEMBLY

Radiall's RF cables, connectors and assemblies are able to satisfy quantum technologies' specific requirements, including:

- Densification: Miniature connectors, multi coaxial harness (bundle), small diameter semi-rigid cables, multi-pin coax connectors
- Thermalization: Through panel, thermal conductivity insulator
- Solution: A-magnetism, seamless/solderless connectors, HF and material expertise, (cryo)switches and (cryo) attenuators



SMPM-LOCK

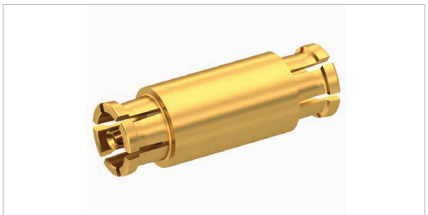

SMPW




IMP (LP-SR-HD)



ATTENUATOR



SEMIRIGID 3D BENDING

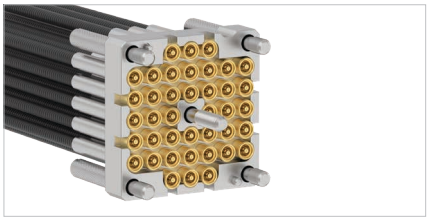

F2C-40



SMA



SMA 2.9



SMP

SPACE QUALIFIED PRODUCTS

COAXIAL CONNECTORS

Full range of coaxial connectors operating up to Q band.

- SMA, SMA 2.9 and Very High Power TNC interfaces ESCC QPL:
- Qualified according to ESCC 3402 specifications by European Space Agency (ESA)
- TNC and SMP interfaces classified EPPL: ESA Preferred Part List

Radiall has expanded the SMP range to include, SMP-LOCK® connectors featuring a robust locking mechanism. Qualified for space applications, this new interface is the best solution when size, weight, security and high RF performance are required.

This new interface is compatible with most of Radiall products below.

- 2.4 mm interface up to 50 GHz

LOW LOSSES CABLE ASSEMBLIES

Space qualified low loss flexible coaxial cable assemblies up to 40 GHz

- Available connectors: SMA, SMA 2.9, TNC, Very High Power TNC (ESA QPL), SMP or SMP-LOCK®

SEMI-RIGID CABLE ASSEMBLIES

Space qualified semi-rigid coaxial cable assemblies up to 40 GHz

- Available connectors: SMA, SMA 2.9, TNC, Very High Power TNC, SMP or SMP-LOCK®

COUPLERS & POWER DIVIDERS

Space qualified passive couplers DC-22 GHz and power dividers DC-31 GHz

- Admissible power up to 200 WCW
- Available connectors: SMA, SMA 2.9 and TNC



esa
European Space Agency
Agence spatiale européenne

Certificate of Qualification No. 68R

This is to certify that RADIALL, Voreppe, France has been qualified by ESA for the supply of Connectors, RF, coaxial, Solder and Crimp Contacts, Male, Female Adaptors and Connecting Pieces, based on Type SMA for use in ESA space programmes, according to ESCC Generic Specification 3402 and associated Detail Specifications 3402/001, 3402/002 and 3402/003 as recommended by the Space Components Steering Board.

This certificate is valid until December 2023.

Head of the Product Assurance and Safety Department

Date 31 August 2022



esa
European Space Agency
Agence spatiale européenne

Certificate of Qualification No. 283Grev1

This is to certify that RADIALL, Voreppe, France has been qualified by ESA for the supply of Connectors, RF, coaxial, Solder and Crimp Contacts, Male, Female Adaptors and Connecting Pieces, based on Type SMA 2.9 for use in ESA space programmes, according to ESCC Generic Specification 3402 and associated Detail Specifications 3402/021, 3402/022 and 3402/023 as recommended by the Space Components Steering Board.

This certificate is valid until December 2023.

Head of the Product Assurance and Safety Department

Date 31 August 2022



esa
European Space Agency
Agence spatiale européenne

Certificate of Qualification No. 350B

This is to certify that RADIALL, Voreppe, France has been qualified by ESA for the supply of Connectors, RF, Coaxial,Very High Power, 50 OHMs, Based on Type TNC-VHP for use in ESA space programmes, according to ESCC Generic Specification 3402 and associated Detail Specifications 3402/027 and 3402/028 as recommended by the Space Components Steering Board.

This certificate is valid until April 2024.

Head of the Product Assurance and Safety Department

Date 31 August 2022



Certificat CNES
INSTRUCTION RNC-CNES-Q-ST-70-104

cnes
CENTRE NATIONAL D'ETUDES SPATIALES

Le Centre National d'Etudes Spatiales atteste que la Société
RADIALL site de Château-Renault
a été certifiée pour la réalisation de
Interconnexions coaxiales souples

Procédés de base: **Brasages manuel et HF**
Suivant le PID référence: **PAQ-CHR-0014 Is H rev 2**

ASF n° 13-111
Date d'agrément : Avril 2023
Validité du certificat : Avril 2025

La Responsable Technique, A. BONZI
Le Sous-Directeur Qualité et Expertise, A. MALLET



Certificat CNES
INSTRUCTION RNC-CNES-Q-ST-70-104

cnes
CENTRE NATIONAL D'ETUDES SPATIALES

Le Centre National d'Etudes Spatiales atteste que la Société
RADIALL site de Château-Renault
a été certifiée pour la réalisation de
Interconnexions coaxiales semi-rigides

Procédés de base: **Brasages manuel et HF**
Suivant le PID référence: **PAQ-CHR-0016 (F) Is 4**

ASF n° 13-101
Date d'agrément : Novembre 2021
Validité du certificat : Novembre 2023

La Responsable Technique, A. BONZI
La Sous-Directrice à l'Assurance Qualité, A. CADIOU

Other Components

TERMINATIONS

Range of low power coaxial loads up to 40 GHz and ESA qualified (European Space Agency).

- Available interfaces: SMA, SMA 2.9, SMP, SMP LOCK®, 2.4 mm and TNC.



esa

European Space Agency
Agence spatiale européenne

Certificate of Qualification No. 185M

This is to certify that RADIALL, Saint-Quentin-Fallavier, France has been qualified by ESA for the supply of Passive Devices, R.F. Coaxial Loads, Based on Type R404 for use in ESA space programmes, according to ESCC Generic Specification 3403 and associated Detail Specifications 3403/006 and 3403/009 as recommended by the Space Components Steering Board.

This certificate is valid until March 2026.

Head of the Product Assurance and Safety Department — Date 22 April 2024

ATTENUATORS

Range of low power coaxial attenuators DC - 40 GHz and qualified by European Space Agency (ESA).

- Available interfaces: SMA, SMA 2.9, SMP LOCK® and 2.4 mm.
- Attenuation 0 to 30 dB.

PHASE SHIFTERS

These components create a mechanical adjustable phase shift by variation in the physical length of the transmission line up to 22 GHz.



esa

European Space Agency
Agence spatiale européenne

Certificate of Qualification No. 178N

This is to certify that RADIALL, Saint-Quentin-Fallavier, France has been qualified by ESA for the supply of R.F. Attenuators, Fixed, Coaxial, Based on Type R413 for use in ESA space programmes, according to ESCC Generic Specification 3403 and associated Detail Specifications 3403/005 and 3403/008 as recommended by the Space Components Steering Board.

This certificate is valid until March 2026.

Head of the Product Assurance and Safety Department — Date 22 April 2024




SWITCHES APPLICATIONS


COAXIAL TRANSFER SWITCHES (DPDT)

A DPDT is Double Pole Double Throw switch that provides two independent pairs of RF paths that are actuated simultaneously. The transfer switch is a modified DPDT device, whereas a true DPDT switch is a six port device that contains completely independent transmission paths.

In a transfer switch, two transmission paths are not completely independent as shown below:

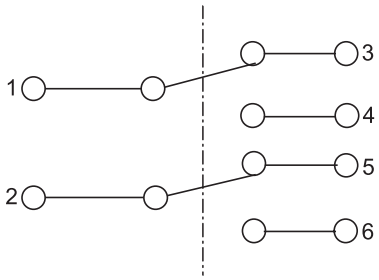


DPDT



TRANSFER


Examples of transfer switch applications:

R577 RAMSES, R593 Platinum or R513 Titanium series can be selected for this application.

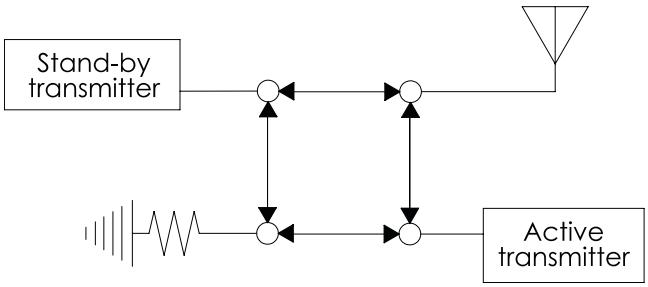

REDUNDANCY OF TWO TRANSMITTERS

Active transmitters are connected directly to the antenna. A second transmitter is terminated to a medium power termination and put in stand by position; ready to switch to the antenna in case of a failure of the active transmitter. This is done to create redundancy for antenna maintenance.

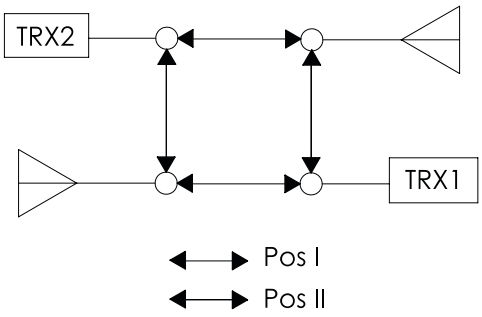


TWO TRANSMITTERS TO TWO ANTENNAS

For better signal diversity, two antennas are alternately connected to either of the two transmitters.

Other Components


COAXIAL TRANSFER AS A BYPASS SWITCH FOR CIRCUIT INSERTION APPLICATIONS

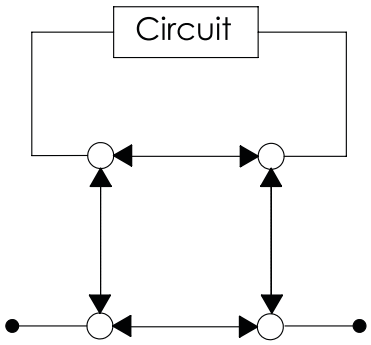

A full RF or microwave passive circuit or circuit element as a filter can be inserted into a coaxial transmission line by using a transfer switch. This element is shortened by a transfer blade in through position.

OTHER RF ARRANGEMENTS FOR A BYPASS FUNCTION


- Two SPDT switches configured to operate as a bypass switch.
- R570 RAMSES, R596 (Surface Mount Technology) or R595 PLATINUM series can be used to achieve a bypass function.

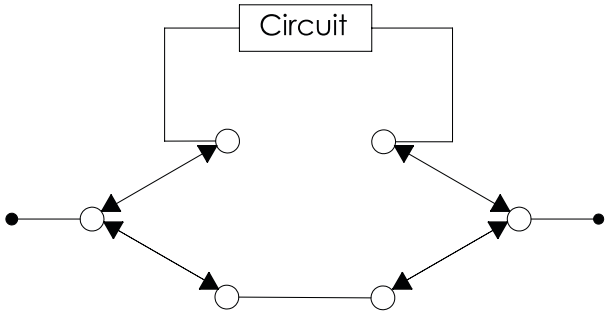


A more basic option, SPDT (Single Pole Double Throw) can be used to perform a bypass switch function. The advantage of using two SPDT relays instead of a transfer switch is a possible reduction in total package size. Generally, the use of two SPDT creates a higher isolation than a transfer switch.

A DP3T SWITCH CONFIGURED TO OPERATE AS A TRANSFER SWITCH

A R585 RAMSES or R595 Platinum series can be selected to insert a passive or active component or circuit in a RF or microwave line.

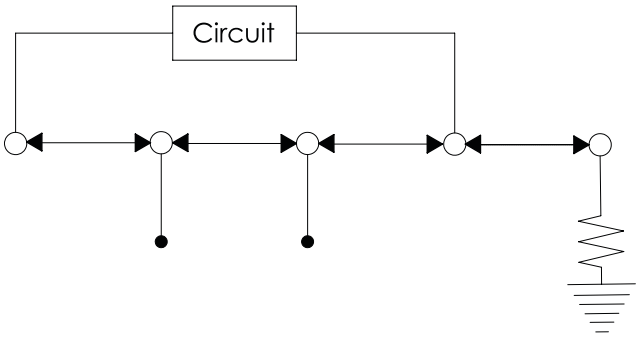

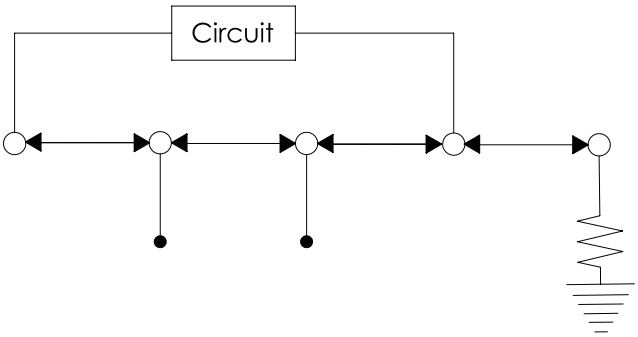

An active component as an amplifier can be inserted in a microwave line; this amplifier is connected to a 50 Ohm termination (as a booster in stand-by status) when not inserted in the main coaxial line.

NAVIGATOR

Coaxial Switches Navigator

Family	Series	RF Type (Switch Configuration)	Frequency [1]	Connector Type	Number of Connector Ports	Actuator Type			Actuator Voltage	Indicator Circuit	TIL Drive	Self Cut-Off □ = If Latching	Diodes	Repeatability Guarantee (dB)	RF Terminated IL = Internal loads EL = External loads	Life Cycles (Million)
						Normally Open	Latching	Failsafe								
RAMSES	R523 & R524	SPnT	8	SMA/SMA 2.9	8 ways	■	■	-	12/28	■	■	□	■	-	IL	3
															-	
			F◊ H○	SMA	10 ways ○ 12 ways ◊										IL	2
															-	
	R573 & R574	SPnT	V	1.85 mm	4 - 6 ways	■	■	-	12/28	■	■	□	■	-	IL	3
			J	2.4 mm	4 or 6 ways	■	■	-	12/28	■	■	□	■	-	IL	2
															-	
			8	SMA 2.9	3 - 6 ways	■	■	-	12/28	■	■	□	■	-	IL	2
															-	
			4 or F○ F◊ F	SMA	3 - 8 ways 2 ways ○ 10 ways ◊	■	■	-	12/28	■	■	□	■	-	IL	3
															-	5
			E	QMA	3 - 6 ways	■	■	-	12/28	■	■	□	■	-	-	5
			9	DIN 1.6/5.6 [2]	3 - 6 ways	■	■	-	12/28	■	■	□	■	-	-	2
			0 1¤ 1	N	3 - 6 ways 7 - 12 ways ¤	■	■	-	12/28	■	■	□	■	-	IL	2
			2	BNC	3 - 6 ways	■	■	-	12/28	■	■	□	■	-	-	2
			5 6	TNC	3 - 6 ways	■	■	-	12/28	■	■	□	■	-	-	2
	R570	SPDT	V	1.85 mm	3 ports	■	■	-	12/28	■	■	■	■	-	-	2
			J	2.4 mm	3 ports	-	■	■	12/28	■	■	■	■	-	-	2
			8	SMA 2.9	3 ports	-	■	■	12/28	■	■	■	■	-	-	10
			3 4 F	SMA	3 ports	-	■	■	12/28	■	■	■	■	-	-	10
			E	QMA	3 ports	-	■	■	12/28	■	■	■	■	-	-	10
			9	DIN 1.6/5.6 [2]	3 ports	-	■	■	12/28	■	■	■	■	-	-	5
			A	PC Board Mount	3 ports	-	■	■	12/28	■	■	■	■	-	-	5
			0 1	N	3 ports	-	■	■	12/28	■	■	■	■	-	-	2.5
			5 6 D	TNC	3 ports	-	■	■	12/28	■	■	■	■	-	-	2.5
			2	BNC	3 ports	-	■	■	12/28	■	■	■	■	-	-	2.5
	R577	DPDT	J	2.4 mm	4 ports	-	■	■	12/28	■	■	■	■	-	-	2
			8	SMA 2.9	4 ports	-	■	■	12/28	■	■	■	■	-	-	2.5
			3 4 F	SMA	4 ports	-	■	■	12/28	■	■	■	■	-	-	2.5
			E	QMA	4 ports	-	■	■	12/28	■	■	■	■	-	-	2.5
			9	DIN 1.6/5.6 [2]	4 ports	-	■	■	12/28	■	■	■	■	-	-	2.5
			0 1	N	4 ports	-	■	■	12/28	■	■	■	■	-	-	2.5
			5 6	TNC	4 ports	-	■	■	12/28	■	■	■	■	-	-	2.5
			2	BNC	4 ports	-	■	■	12/28	■	■	■	■	-	-	2.5
	R585	SPDT ZC	V	1.85 mm	5 ports	■	■	-	12/28	■	■	■	■	-	2 IL	2
		(ZC=terminated)	J	2.4 mm	5 ports	■	■	■	12/28	■	■	■	■	-	2 EL	2
			8	SMA 2.9	3 or 5 ports	■	■	■	12/28	■	■	■	■	-	2 EL	10
															2 IL	2
			3 4 F	SMA	3 or 5 ports	■	■	■	12/28	■	■	■	■	-	2 EL	10
															2 IL	2
		DP3T	V	1.85 mm	5 ports	■	■	-	12/28	■	■	■	■	-	-	2
			J	2.4 mm	5 ports	■	■	■	12/28	■	■	■	■	-	-	2
			8	SMA 2.9	5 ports	■	■	■	12/28	■	■	■	■	-	-	10
			3 4 F	SMA	5 ports	■	■	■	12/28	■	■	■	■	-	-	10
		BYPASS	V	1.5 mm	4 ports	■	■	■	12/28	■	■	■	■	-	IL	2
			J	2.4 mm	4 ports	■	■	■	12/28	■	■	■	■	-	EL	2
			8	SMA 2.9	4 ports	■	■	■	12/28	■	■	■	■	-	EL	10
			3 4 F	SMA	4 ports	■	■	■	12/28	■	■	■	■	-	EL	10

Coaxial Switches Navigator

Family	Series	RF Type (Switch Configuration)	Frequency [1]	Connector Type	Number of Connector Ports	Actuator Type			Actuator Voltage	Indicator Circuit	TIL Drive □ = If Normally Open	Self Cut-Off	Diodes	Repeatability Guarantee (dB)	RF Terminated IL = Internal loads EL = External loads	Life Cycles (Million)
						Normally Open	Latching	Failsafe								
USB	R573xxxx01 R574xxxx01	SPnT	8	SMA 2.9	6 or 8 ways	■	-	-	5	■	-	-	-	-	IL -	2
			F	SMA	6 or 8 ways	■	-	-	5	■	-	-	-	-	IL -	2 5
SUBMINIATURE	R591	SPnT	3 F	SMA	4 - 6 ways	■	■	-	12/28	-	□	-	■	-	-	10
			E	QMA	4 - 6 ways	■	■	-	12/28	-	□	-	■	-	-	10
			8	SMA 2.9	4 - 6 ways	■	■	-	12/28	-	□	-	■	-	-	2
PLATINUM	R593	DPDT	3 4 F	SMA	4 ports	-	■	-	24	■	■	■	■	.03	-	10
			8	SMA 2.9	4 ports	-	■	-	24	■	■	■	■	.03	-	5
	R594	SPnT	3 4 F	SMA	4 - 6 ways	-	■	-	24	■	■	■	■	.03	IL	10
			8	SMA 2.9	4 - 6 ways	-	■	-	24	■	■	■	■	.03	IL	2
	R595	SPDT	8	SMA 2.9	3 ports	-	■	-	15/24	■	■	■	■	.05	-	10
			3 4 F	SMA	3 ports	-	■	-	15/24	■	■	■	■	.03	-	10
		SPDT ZC	8	SMA 2.9	5 ports	-	■	-	15/24	■	■	■	■	.05	2 EL	2.5
		(ZC=terminated)	3 4 F	SMA	3 ports	-	■	-	15/24	■	■	■	■	.03	2 IL	10
		DP3T	8	SMA 2.9	5 ports	-	■	-	15/24	■	■	■	■	.05	-	10
			3 4 F	SMA	5 ports	-	■	-	15/24	■	■	■	■	.03	-	10
		BYPASS	8	SMA 2.9	4 ports	-	■	-	15/24	■	■	■	■	.05	EL	2.5
			3 4 F	SMA	4 ports	-	■	-	15/24	■	■	■	■	.03	EL	10
TITANIUM	R513	DPDT	8	SMA 2.9	4 ports	-	■	-	24	■	■	■	■	.05	-	5
			3 4 F	SMA	4 ports	-	■	-	24	■	■	■	■	.03	-	10
	R512	SPnT	8	SMA 2.9	4 - 6 ways	-	■	-	24	■	■	■	■	.05	IL	1
	R514	SPnT	3 4 F	SMA	4 - 6 ways	-	■	-	24	■	■	■	■	.03	IL	2.5
QUARTZ	R516	SPDT	3 4 7	-	-	-	■	■[3]	12/24	-	-	-	-	-	-	3
LOW PIM	R570xxxxxxLP	SPDT	4	SMA	3 ports	-	■	■	12/28	■	■	■	■	-	-	2
			1	N	3 ports	-	■	■	12/28	■	■	■	■	-	-	2
	R577xxxxxxLP	DPDT	4	SMA	4 ports	-	■	■	12/28	■	■	■	■	-	-	2
			1	N	4 ports	-	■	■	12/28	■	■	■	■	-	-	2
	R573xxxxxxLP	SPnT	4	SMA	4 or 6 ports	■	■	-	12/28	■	■	■	■	-	-	2
			1	N	4 or 6 ports	■	■	-	12/28	■	■	■	■	-	-	2
TVAC	R571xxx121	SPDT	F	SMA	3 ports	-	■	-	28	■	-	■	■	-	-	10
			8	SMA 2.9	3 ports	-	■	-	28	■	-	■	■	-	-	10
	R578xxx121	DPDT	F	SMA	4 ports	-	■	-	28	■	-	■	■	-	-	2.5
			8	SMA 2.9	4 ports	-	■	-	28	■	-	■	■	-	-	2.5
	R583 & R584	SPnT	F	SMA	4 or 6 ways	-	■	-	28	■	-	-	-	-	IL -	2 5
			8	SMA 2.9	4 or 6 ways	-	■	-	28	■	-	-	-	-	IL -	2
CRYOGENIC	R571xxx141	SPDT	4	SMA	3 ports	-	■	-	28	-	-	-	-	-	-	10
	R583xxx141 R592xxx141	SPnT	F		6 ways	-	■	-	12	-	-	-	-	-	-	10

Notes

Please consult the Coaxial Switches catalog for other P/N selection digits (including electrical and other options). Switches are break-before-make and 50 Ohms Impedance unless otherwise specified.

1. Corresponds to the 4th digit in the part number (ex: R77 "J" for 50GHz)

2. 75 Ohms products

3. Failsafe inverted RF path also available for Bypass application

SIMPLIFICATION *is our* INNOVATION

We advance the design and engineering process for innovators, ground-breakers and pioneers of technology. We reduce weight, improve durability and streamline installation to provide leading-edge connectors that drive product performance.

AREA OFFICES LOCAL CONTACTS

EUROPE	ADDRESS	PHONE	FAX	EMAIL
FINLAND	**Radiall Finland** PO Box 202, 90101, Oulu	+358407522412		infofi@radiall.com
FRANCE	**Radiall SA** 25 Rue Madeleine Vionnet, 93300, Aubervilliers	+33149353535		info@radiall.com
GERMANY	**Radiall GmbH** Carl-Zeiss-Straße 10, 63322, Rödermark	+49607491070	+496074910710	infode@radiall.com
ITALY	**Radiall Elettronica S.R.L.** Via Zambeletti 19, 20021, Baranzate Milano	+39024885121	+390248843018	infoit@radiall.com
NETHERLANDS	**Radiall Nederland BV** Hogebrinkerweg 15b, 3871, KM Hoevelaken	+31332534009	+31332534512	infonl@radiall.com
SWEDEN	**Radiall AB** Sollentunavägen 63, 191 40 Sollentuna	+4684443410		infose@radiall.com
UNITED KINGDOM	**Radiall Ltd.** Profile West, 950 Great West Rd., Brentford, Middlesex TW8 9ES	+441895425000	+441895425010	infouk@radiall.com
ASIA				
CHINA	**Shanghai Radiall Electronics Co., Ltd.**	+862166523788	+862166521177	infosh@radiall.com
	No.688 Hui Fang Road, Shanghai, China, 201806			
HONG KONG	**Radiall Electronics (Asia) Ltd.** Room A, 16/F., Ford Glory Plaza,	+85229593833	+85229592636	infohk@radiall.com
	37-39 Wing Hong Street, Cheung Sha Wan, Kowloon, Hong Kong			
INDIA	**Radiall India Pvt. Ltd.**	+918028395271	+918028397228	infoin@radiall.com
	25D, Phase 2, Peenya Industrial Area, Bengaluru 560 058			
JAPAN	**Nihon Radiall K.K.**	+81364274455	+81364274456	infojp@radiall.com
	Sawada Building 8F, Shibuya-ku, Tokyo 150-0011			
AMERICAS				
USA & CANADA	**Radiall USA, Inc.** 8950 South 52nd Street, Ste. 401 Tempe, AZ 85284	+14806829400	+14806829403	infousa@radiall.com

GLOBAL PRESENCE

Australia · Austria · Belgium · Brazil · Czech Republic · Denmark · Estonia · Greece · Hungary · Indonesia · Israel · Korea · Latvia · Lithuania
Malaysia · Norway · Philippines · Poland · Portugal · Singapore · South Africa · Spain · Switzerland · Taiwan · Thailand · Turkey · Vietnam